



ETL Systems

New technologies
in RF distribution
www.etlsystems.com

Model Number:
FN-D-K3L1-24130-S5xx

Falcon Series


Frequency Converter Module

Ku-Band Agile Downconverter

Ku to L-Band conversion. The 1U Genus chassis has the capacity for up to five hot-swap frequency converter modules. These can be all Upconverters, all downconverters or a mix of both. Other module types are also available, these can be mixed and housed in the Genus chassis.

Typical applications:

- Teleports & Earth Stations
- Satellite Operations
- Government & Defence applications
- Telemetry, Tracking & Command
- High Resilience applications

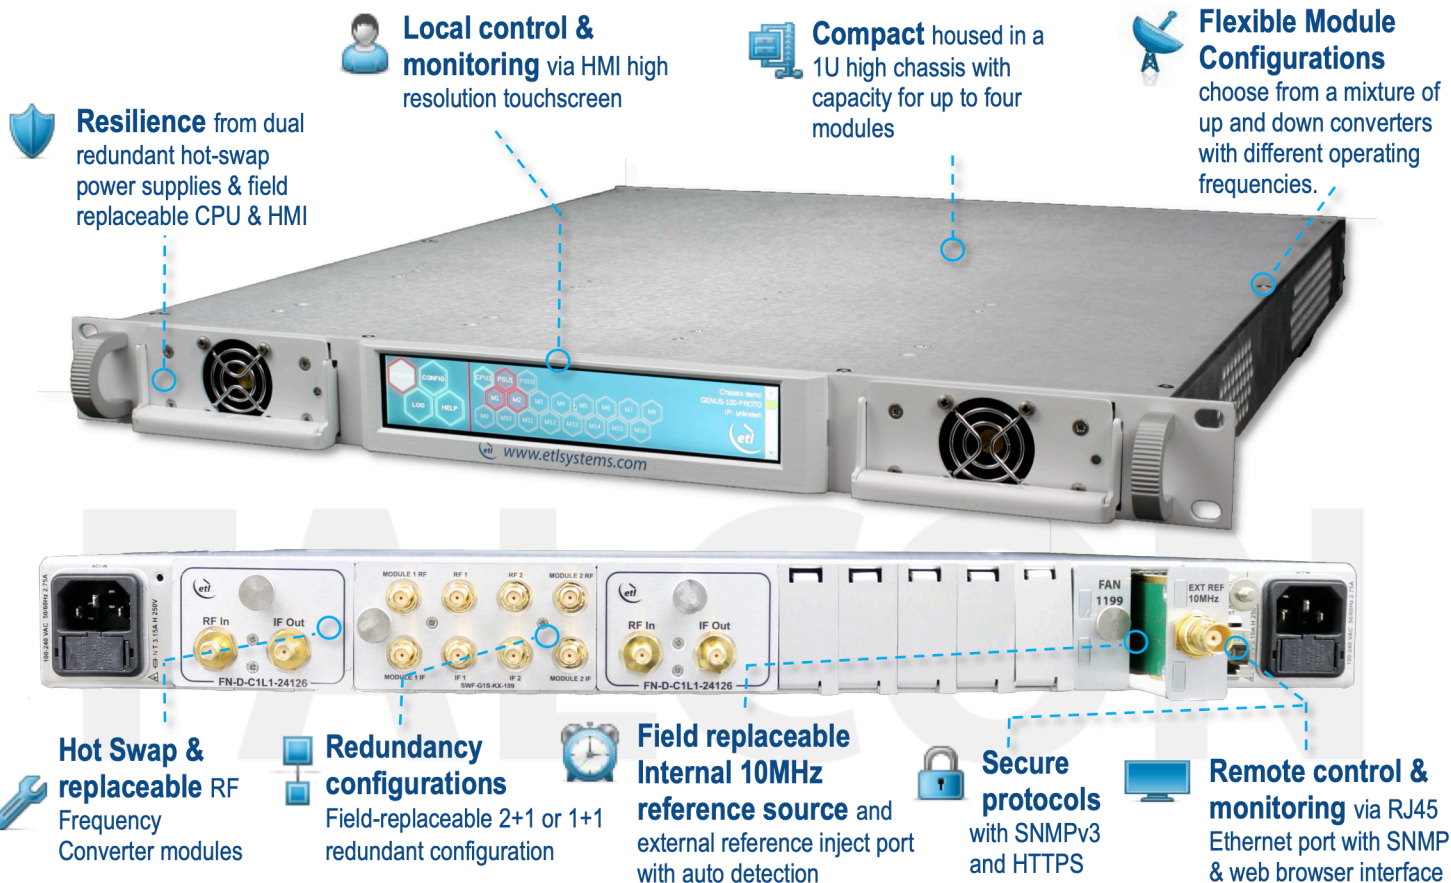

Chassis - Specification

Dimensions / Weight / Colour	1U high x 550mm deep x 19" wide / <10 kg / RAL9003—White (Semi-matte)
Capacity	Total of 17 module slots. Note that 1 slot may be used for fan (if required) and 1 slot may be used for 10 MHz EXT inject module (if required). Note actual modules may require >1 slot. Refer to required module spec table.
Temperature	Operating: 0°C to +45°C / Storage: -20°C to +75°C
Location / Humidity / Altitude	Indoor use only / 20 to 90% non-condensing / 10,000 feet AMSL (Operational) 30,000 feet AMSL (Storage) Above Mean Sea Level
Control & Monitoring	Local: HMI touch screen Remote: Ethernet via RJ45, 10BaseT/100 BaseTx. TCP/IP, SNMP V3 & HTTPS & Web browser interface HMI and CPU field replaceable. Each module independently monitored and reported.
MTTR	20 minutes (15 minutes to retrieve spare part and 5 mins to replace) Applies to LRUs only and assumed in house stock
AC Input / Consumption	85-264Vac 50/60Hz / 150W
PSU Redundancy	Dual redundant and alarmed Diode OR. Hot swappable
Input & Output Connectors	Dependant upon module fitted



ETL Systems

New technologies
in RF distribution
www.etlsystems.com

Model Number:
FN-D-K3L1-24130-S5XX



Frequency Converter Module

Compact form factor allowing multiple modules to be housed in 1U chassis.
Each module uses 3 slots in the chassis.

Frequency Downconverter Module - RF Parameters		Redundancy Module - RF Parameters		
Model Numbers		FN-D-K3L1-24130-xxxx	SWF-G1S-KX-109A	SWF-G1S-KX-107A
Size		3 slots wide	4 slots wide	6 slots wide
Redundancy		Standalone module	1+1 (Note: This column denotes specs for 24130 in 1+1 configuration)	2+1 (Note: This column denotes specs for 24130 in 2+1 configuration)
Input Frequency Range		12750 – 14500 MHz - User Controllable In 1kHz step size		
Output Frequency Range		950—1950 MHz		
LO Frequencies		11800—12550 MHz		
Mean Conversion Gain		Max. 35 ± 1.5 dB / Min. 5 ± 1.5 dB	Max. 31.3 ± 1.5 dB / Min. 1.3 ± 1.5 dB	Max. 28.8 ± 1.5 dB / Min. –1.2 ± 1.5 dB
Gain steps		0.25 ± 0.15 dB		
Gain Flatness (50 Ohm)		Full Instantaneous Band: ±2.0 dB Any 40 MHz: ±0.35 dB		
Slope Compensation		0—6 dB		
Slope Control Steps		1 dB		
Operational Input Level		-75 to –30 dBm		
Input Return Loss		Typ. -15 dB / Min. -10 dB	Typ. -11 dB / Min. –8 dB	Typ. -11 dB / Min. –8 dB
Output Return Loss		Typ. -18 dB / Min. -14 dB	Typ. -15 dB / Min. -11 dB	Typ. -15 dB / Min. -12 dB
Noise Figure (at max. gain)		Typ. 10 dB / Max 12 dB	Typ. 12 dB / Max 14 dB	Typ. 13.5 dB / Max 15.6 dB
OP1dB (at max. gain)		Typ. +17 dBm / Min. +15 dBm	Typ. +15.3 dBm / Min. +13.3 dBm	Typ. +14.3 dBm / Min. +12.3 dBm
OIP3 (at max. gain, Δf = 5 MHz two carriers 0 dBm each)		Typ. +27 dBm / Min. +25 dBm	Typ. +25.3 dBm / Min. +23.3 dBm	Typ. +24.3 dBm / Min. +22.3 dBm
Group Delay (max pk-pk)		1 ns		
Internal Reference Stability		± 5 x 10 ⁻⁸ over 0 to 50°C		
Phase Noise (Typical values)	@10Hz offset	-70 dBc / Hz		
	@100Hz offset	-83 dBc / Hz		
	@1KHz offset	-90 dBc / Hz		
	@10KHz offset	-90 dBc / Hz		
	@100KHz offset	-98 dBc / Hz		
	@1MHz offset	-115 dBc / Hz		
Spurs In-band	Non-carrier Related	< -75 dBm		
Spurs Out-of-band	Carrier Related	< -60 dBc		
	Non-carrier Related	< -75 dBm		
LO Breakthrough		< -80 dBm		
Image Rejection		>60 dB		
Conversion stages		Single		
External Reference		Input Freq. 10 MHz Input Level +3 dBm ±3 dB		
Mute		60 dB		
Spec version		0.1	1.0	0.1

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Note 3: All specs are for 50 Ohm connectors unless detailed otherwise.