


Alto L-band Redundant Amplifier Module

with low noise, high linearity, variable gain and slope control

L-Band redundant amplifier module. Designed to be housed in Genus 2U 19" chassis. It operates over 850-2450 MHz. The module has low noise, high linearity, +45 to +15dB gain range with variable gain control. The chassis has the capacity 16 amplifier modules. Positive slope compensation between 0dB (flat response) and +8dB.

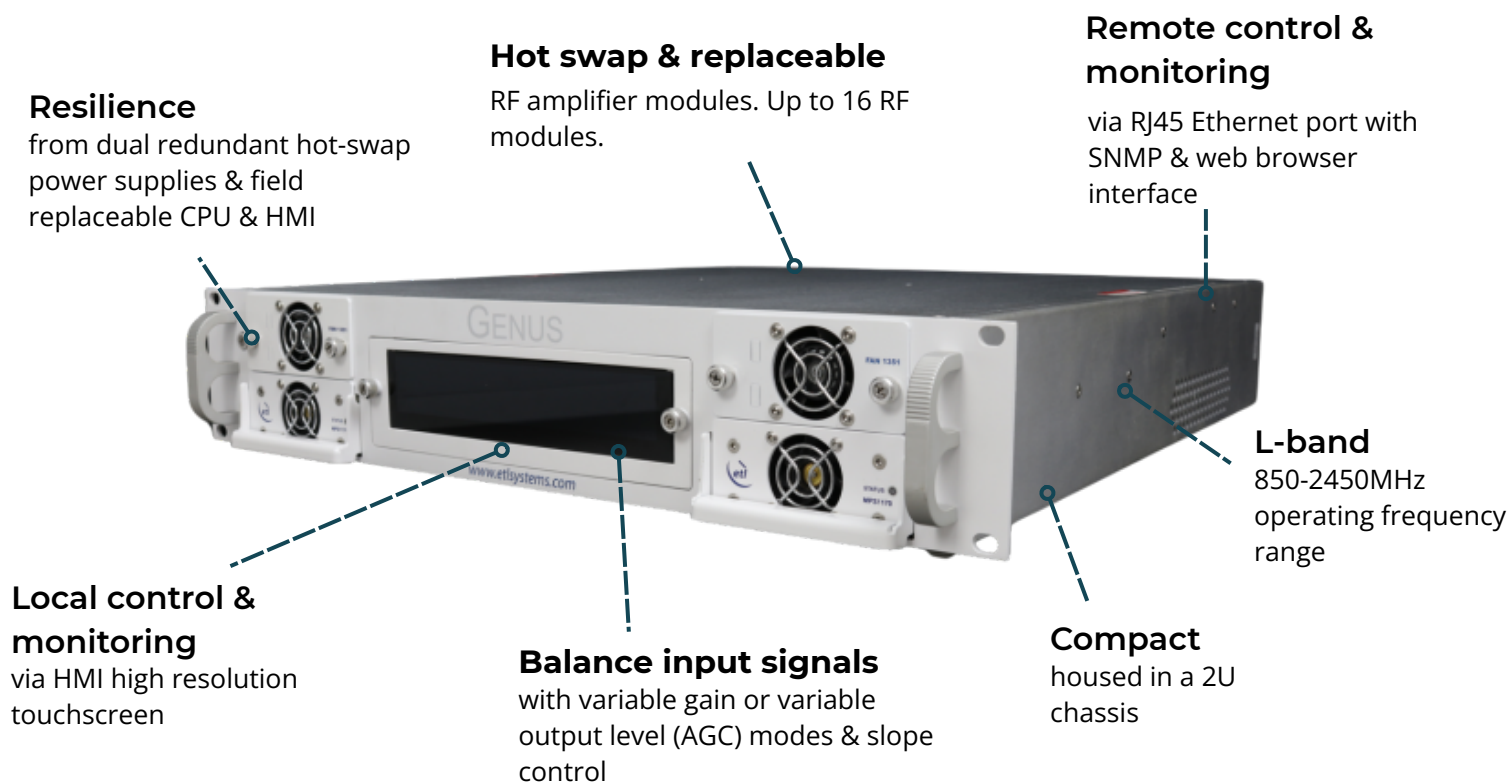

Chassis Specification	
Dimensions/Weight/Colour	2U high x 550mm deep x 19" wide / <10kg / RAL9003 - white (semi-matte)
Capacity	17 module slots. Note: Actual modules may require >1 slot. Refer to required module spec table.
Temperature	Operating: 0°C to +45°C Storage: -20°C to +75°C
Location/Humidity/Altitude	Indoor use only / 20 to 90% non-condensing / 2,000m AMSL (Operational) 8,000m AMSL (Storage) Above Mean Sea Level
Control & Monitoring	Local: HMI, capacitive touch screen Remote: Ethernet via RJ45, 10BaseT/100 BaseTx. ETL TCP/IP, SNMPv2/3, HTTPS & built-in web server. HMI and CPU field replaceable.
MTTR	20 minutes (15 minutes to retrieve spare part and 5 mins to replace). Applies to LRUs only and assumed in-house stock.
AC Input/Consumption	85-264Vac 50/60Hz / 275W max. consumption at steady state
PSU Redundancy	Dual redundant and alarmed. Diode OR. Hot swappable.
Input & Output Ports	Dependant upon module fitted



Smart Amplifier Module

Compact form factor allows multiple modules to be housed in the 2U GENUS chassis. Each module occupies 1 slot in the chassis.

RF Parameters		
Model Numbers	ALT-G2R-L1-121	
Frequency Range	850 - 2450 MHz	
Size	1 slot wide	
MTBF	>150,000 hours	
Gain	45 $\pm$ 2.0 dB max. 15 $\pm$ 2.0 dB min.	
Gain Flatness When set to 0dB slope. In manual gain control mode, not AGC.	850 - 2150MHz	$\pm$ 1.5
	Any 36MHz	$\pm$ 0.25
Gain Steps	0.25 $\pm$ 0.15 in manual gain mode	
Slope Control Range	0 to 8 dB	Pivot point is at 2150MHz. This is the point of max gain when positive slope is set to a value other than 0dB.
Slope Control Steps	1 $\pm$ 0.25	
Input Return Loss	18 dB typ. 12 dB min.	
Output Return Loss	18 dB typ. 12 dB min.	
Isolation	60dB typ. 50dB min.	With amplifiers set at the same gain level. Worst case isolation is between adjacent amps, isolation degrades dB to dB for different gain levels.
Reverse Gain	< -60 dB typ.	
Noise Figure	4 dB typ. @ max gain setting 6 dB max. @ max gain setting	
1db GCP	30 dBm typ. 29 dBm min.	Output power, over full gain range
OIP3	41 dBm typ. 38 dBm min.	At max. gain
OIP2	60 dBm typ. 56 dBm min.	At max. gain
RF Output Detector (dBm)	-20 min. 30 max. $\pm$ 3 accuracy	
In band, signal independent spuri	<-85 dBm max.	Very low level spuri from CPU clock, switch mode PSU and other control electronics inside the chassis.
Maximum Input Level	+20 dBm	For no damage. Non-operational.

Interface, Monitoring & Alarms		
Control Method	Local and remote as provided by selected chassis	
LNB Power	None	
Environmental		
Operating Temperature	-0°C to +50°C	Up to 8 modules in a chassis.
	-0°C to +45°C	Up to 16 modules in a chassis.
Storage Temperature	-20°C to +75°C	
Location	Indoor use only, within parent GENUS chassis	
Humidity	20 to 90% non-condensing, relative humidity	
Altitude	10,000ft / 3,000m above mean sea level	
Physical Dimensions & Parameters		
Weight	<0.35kg typ.	

The performance quoted above is for a standalone amplifier. For in-chassis performance, see relevant spec. tables.

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.