

DIRECTIONAL COUPLER, 0.3-8 GHz, 20dB, SMA FEMALE

PN: DC-0308-050-20SF



Proudly Made in the USA




Custom Manufacturing
for OEM Procurement




50+ Years of Experience



Interference Stops Here

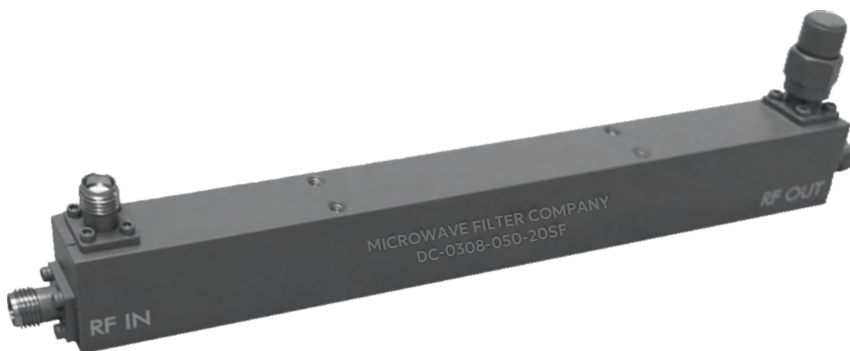

OUTLINE DIMENSIONS

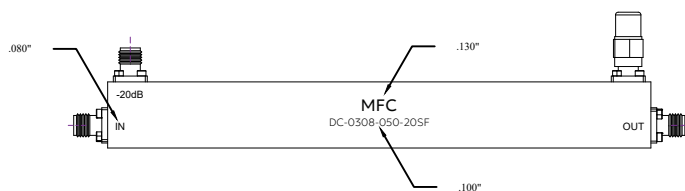

PRODUCT SPECIFICATIONS

Coupler Type	Single
Frequency Low MHz	300
Frequency High MHz	8000
Coupling dB	20
Mainline Loss dB Type	0.5
Directivity dB Type	25
Input Power with MAX	20

Leader in the design, development, and manufacture of high-quality filter products since 1967.

Our team is experienced in serving:

Communications Industry • Military • Aerospace • Broadcast & CATV Operators/Installers
University Research Labs • Government Research Labs • C-Band & Ku-Band Satellite Systems
Wireless Cable Multi-Channel/Multi-Point Manufacturers • Wireless Cable Distribution Systems
CATV Headend Channel Deletion Filters, Networks, Bandpass Filters, & Diplexers For Wireless & PCS