



THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO., INC. AND MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC. THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC

REVISION			
LTR	ECN	DATE	APPR'D

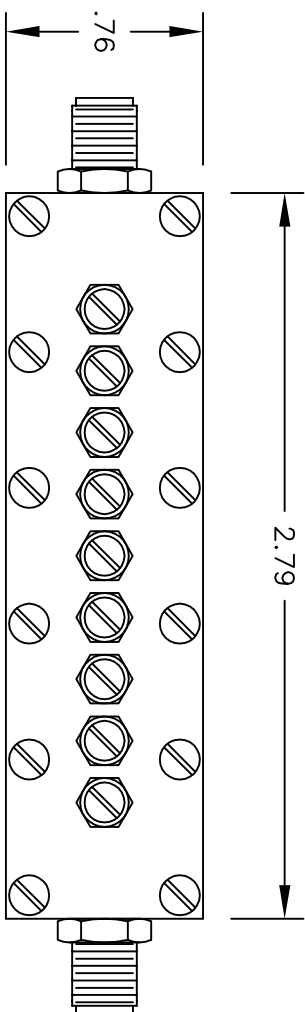

SPECIFICATIONS

CENTER FREQUENCY (F₀): 2520 MHz
 INSERTION LOSS @ (F₀): 1.0 dB TYP
 V.S.W.R. @ (F₀): 1.5:1 MAX
 RELATIVE 3.0 dB BANDWIDTH: 40 MHz MIN
 REJECTION: 30 dB MIN @ 2475 MHz
 30 dB MIN @ 2565 MHz
 50 OHMS
 IMPEDANCE:
 CONNECTORS: SMA — FEMALE

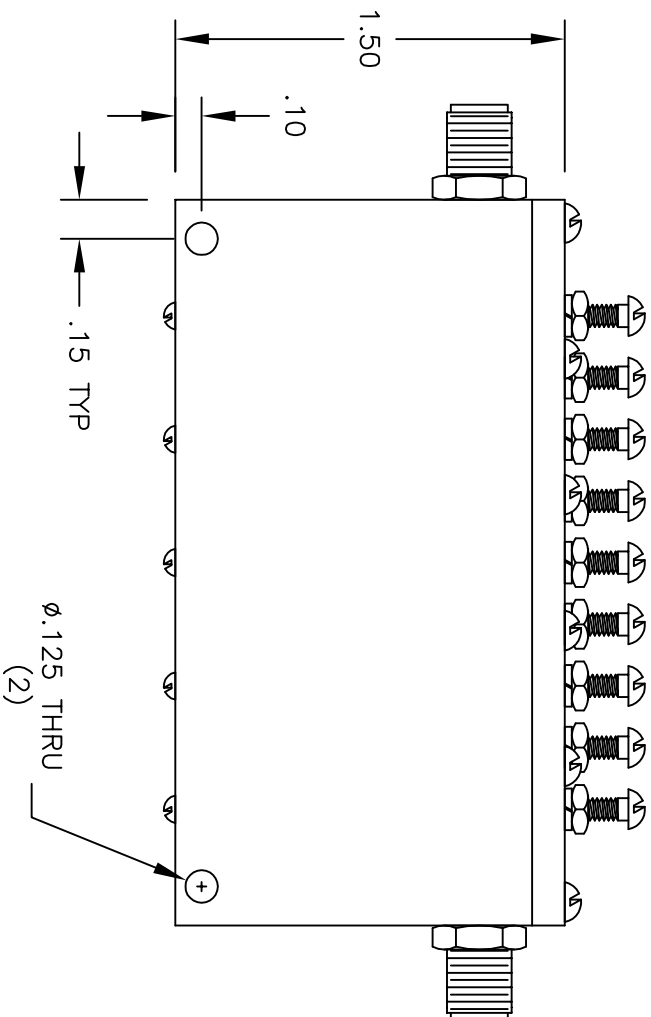

ENVELOPE DRAWING

UNLESS SPECIFIED
 ALL TOLERANCES ±.060

MFC MICROWAVE FILTER CO. INC. 6743 KINNE ST. E. SYRACUSE, N.Y. 13067		TITLE FSCM27834	
DATE 9/23/13		FILTER, BANDPASS	
DWN BY MW			
ENGINEER K.G.		DRAWING NO. 18771	REV —