

Genus Compact Outdoor Unit for 1U Modules

With 10MHz reference source

The Genus compact outdoor unit (ODU) is a weatherproof (IP65 rated) enclosure with a modular design which can house any combination of compatible Genus modules within the unit, supplying operators with a flexible and scalable solution, that reduces spare parts and space requirements.

The ODU chassis houses up to 8 RF modules including Amplifiers, BUC/LNB Power Supply's, Frequency Converters, Matrices, RF over Fibre and Test Loop Translators, which can be mixed. It has additional space for a 1+1 redundancy switch module.

The RF modules are field-serviceable and can be inserted whilst the ODU is in service, giving excellent levels of flexibility and resilience. With additional reliability from field serviceable RF modules, CPU and user replaceable internal 10MHz reference source.

ETL can offer AC to DC outdoor power supplies. Please enquire with ETL if required.

10MHz reference source

User replaceable internal 10MHz reference & distribution source and external 10MHz reference input.

Compact & flexible


ODU chassis holding up to 8 RF modules, which can be mixed.

Secure Communications

with SNMPv3, HTTPS

Remote control & monitoring

via RJ45 Ethernet via RJ45, 10BaseT/100BaseTx, ETL TCP/IP protocol

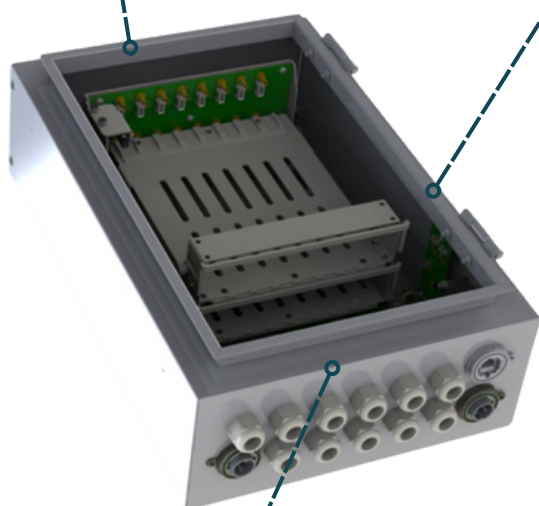

Resilience

from hot-swap & field serviceable RF modules, 10MHz reference source & CPU

Flexible Signal Distribution

Frequency converters, Redundancy Switches (N+1), RF Over Fibre, Matrices and LNB Power Supply Modules are available.

General Specifications		
Capacity		Up to 8 RF modules Note: Actual number dependent upon module type fitted. 1+1 redundancy configurations, please enquire.
Dimensions		450mm high x 300mm wide x 150mm
Weight		<10 kg
Colour		RAL9003 White (Semi-Matte)
AC Consumption		100W (max consumption at steady state)
DC Input		Dual 12VDC power inputs. (ETL can offer AC to DC outdoor power supplies. Please enquire with ETL if required)
10 MHz Distribution		If required please see datasheet for model GNS-393-ODU
Tech Spec Version		0.3
Reliability		
MTTR		15 minutes to replace. Assumes spares at hand. Applies to LRUs only and assumed in house stock.
MTBF	Chassis	> 250 000
	CPU	> 250 000
Field serviceable components		RF modules, CPU & internal 10MHz reference source
Environmental		
Operating temperature		-25°C to 60°C (Upper temperature may be derated dependant on module selection and loading. Max air ambient 55°C. Solar spot heating temperatures up to 60°C).
Location		Outdoor or Indoor use, IP65
Storage temperature		-40°C to +80°C (Not Powered)
Humidity		20% - 100% non-condensing, Relative Humidity
Altitude	Operational	10,000 ft AMSL (Above Mean Sea Level)
	Storage	30,000 ft AMSL (Above Mean Sea Level)
Control & Monitoring		
Remote Control & Monitoring		Ethernet via RJ45, 10BaseT/100BaseTx ETL TCP/IP protocol SNMPv3 & HTTPS Built-in Web Server

RF Module Options						
Amplifier	BUC/LNB Power Supply	Frequency Converter	Matrices	Redundancy Switch	RF Over Fibre	Test Loop Translator (TLT)

Internal 10MHz reference and distribution module for ODU Genus chassis.

The integrated 10MHz card has full control and monitoring via the parent chassis HMI or RJ45. The 10MHz reference source is switchable between this on-board ovenised 10MHz oscillator or the customer supplied external reference, connected to the EXT input connector.

Internal 10 MHz - High Stability Ovenised Oscillator		
Frequency Setting	10±0.000001 MHz	
Output Type	Sinewave	
Output Power Range	-10 dBm to +10dBm	±2 dBm
Output Power Steps	1 dB ±0.5	
Harmonic Rejection		At 0dBm power out
2nd	>40 dBc	
3rd	>50 dBc	
4th	>60 dBc	
5th	>60 dBc	
SSB Phase Noise dBc/Hz	0dBm 10MHz src	
10 Hz	<-120	Typical
100 Hz	<-140	
1000 Hz	<-145	
10 000 Hz	<-155	
100 000 Hz	<-155	
Frequency Stability:		
Over operating temperature	< ±5 x 10 ⁻⁹	
Short-term (per second)	< 5 x 10 ⁻¹²	
Load change (±5%)	< ±5 x 10 ⁻¹⁰	
Power supply variations (±5%)	< ±2 x 10 ⁻⁸	
Frequency Aging		
Per Day	±5 x 10 ⁻¹⁰	
Per Year	±5 x 10 ⁻⁸	
Alarms	10MHz source RF power level. Card operational status.	User settable auto switchover for reference source (Int/Ext)
Hot-Swap	Field replaceable by user.	
External 10 MHz - High Stability Ovenised Oscillator		
Gain		
Max	10 dB ±2dB	
Min	-15 dB ±2dB	
Gain Steps	1 dB ±0.5 dB	
P1dB Compression	+10 dBm output	Max Gain
Return Loss	14 dB Typ.	
Ref. RF Input Power Monitor	-15 dBm to +20 dBm	For indication only
Maximum Input Power	+10 dBm Operating	Power levels above absolute may result in permanent damage
	+15 dBm Absolute	

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy.

Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.

Note 3: All specs are for 50 Ohm connectors unless detailed otherwise.