

THIS DRAWING ALSO DESCRIBES TRADE SECRETS AND IS THE EXCLUSIVE PROPERTY OF MICROWAVE FILTER CO., INC MAY NOT BE DUPLICATED OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF MICROWAVE FILTER CO., INC. THIS DRAWING IS A SOURCE CONTROL DRAWING AND IS PROPRIETARY TO MICROWAVE FILTER CO,, INC. AND

LIM ECN DATE APPR'D



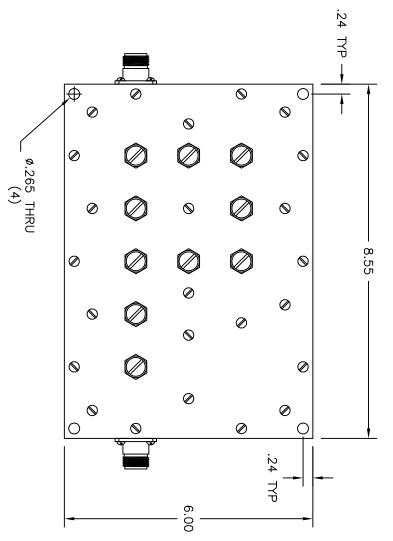

SPECIFICATIONS

CENTER FREQUENCY OPTION (Fo): 1350 TO 1390 MHz

PASSBAND:

PASSBAND LOSS:

2.5 dB TYP

1.5:1 MAX

(Fo) ±250 KHz MIN

PASSBAND V.S.W.R.:

PASSBAND POWER RATING:

REJECTION:

CONNECTORS: IMPEDANCE:

10 WATTS (CW) MAX

40 dB TYP @ (Fo) ±3.0 MHz 30 dB TYP \odot (Fo) ± 2.5 MHz

SMHO 05

N-FEMALE

ENVELOPE DRAWING

E Z G I Z E E Z	DWN BY MW	DATE 8/20/13	MICROVANE FILTER CO. INC. 6743 KINNE ST. E. STRACUSE, N.Y. 13057	
UNAKING NO. REV	BANDPASS FILTER	TITLE	FSCM27834	

UNLESS SPECIFIED ALL TOLERANCES ±.030

В.Р.

18757