



TAOGLAS®



Datasheet

SynergyX 5-in-1

Part No:
MA1555.A.001

Description

SynergyX 5-in-1 – Active Multi-Band GNSS, 2*5G/4G MIMO and 2*Wi-Fi® MIMO

Features:

- Low-profile Permanent Mount Enclosure
- 2* 5G/4G MIMO 600-6000MHz
- 2* Wi-Fi® MIMO 2.4/5.8/7.125 GHz (Including Wi-Fi® 6)
- 1* Multiband GNSS
- Worldwide 5G/4G Bands
- IP67 Waterproof Enclosure
- Dimensions: Ø161.3mm * 67mm
- Staggered RG-174 with SMA(M) / RP-SMA(M) connectors
- RoHS & Reach Compliant

1.	Introduction	2
2.	Specification	3
3.	Mechanical Drawing	8
4.	Installation Instructions	9
5.	Packaging	11
6.	Antenna Characteristics	12
7.	Radiation Patterns	23
	Changelog	100

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.


Ireland & USA
ISO 9001:2015
Certified



Taiwan
ISO 9001:2015
Certified



1. Introduction

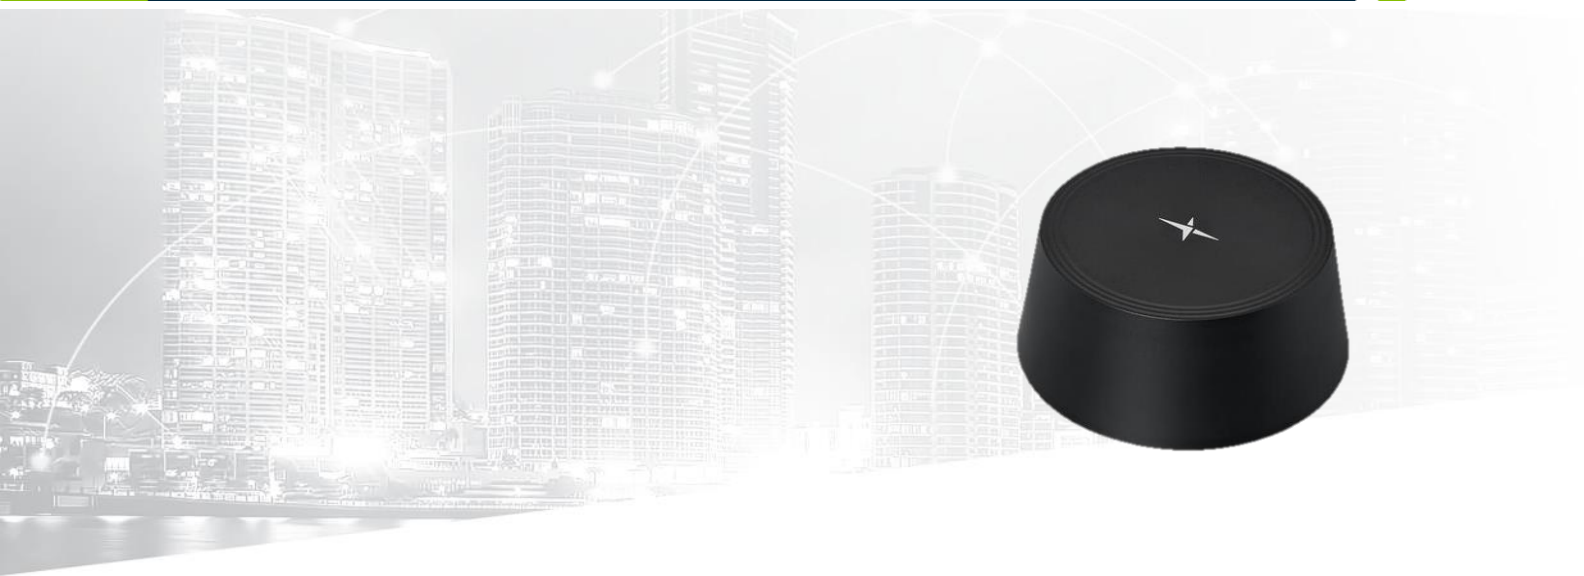

The Taoglas SynergyX MA1555 is a 5-in-1 next-generation permanent mount antenna designed for exceptional performance when used in conjunction with the next generation of routers.

It has been designed for high precision applications and provides excellent performance on the full GNSS spectrum including (GPS/QZSS L1/L2/L5/L6, GLONASS G1/G2/G3, Galileo E1/E5a/E5b/E6, BeiDou B1/B2a/B2b/B3, NAVIC L5, as well as SBAS (WAAS/EGNOS/GAGAN/SDCM/SNAS) for high-performance cm-level positional accuracy which allows the user to achieve higher location accuracy, as well as stability of position tracking in urban environments with their device and with the next generation of routers.

The 5 antennas inside support 5G/4G, Multi-Band GNSS, and Wi-Fi® (2.4GHz/5-7.125GHz). The 5G/4G antennas are wideband 600MHz to 6GHz to cover the full spectrum of 5G frequencies. The Wi-Fi® antenna includes Wi-Fi® 6 and 7 capabilities to ensure your design is future-proof for the next generation of Router connectivity.

Combining Multi-band GNSS, 5G/4G, Wi-Fi® 6, and an incredibly compact PC enclosure with a fully IP67 rated waterproof, The Synergy X MA1555.A.001 is the right powerful, compact combination antenna for your application. It is supplied with 300mm RG-174 pigtail cables and comes with SMA(M) connectors as standard.

Typical Applications:

- Autonomous Driving
- Precision Positioning for Robotics
- Precision Agriculture
- Inventory Management & Container tracking
- Telematics & Asset Tracking
- Timing Accuracy Synchronization

The SynergyX MA1555.A.001 is the latest external addition to an ongoing product roadmap of high precision antennas by Taoglas. For RTK applications when used on the base and/or the rover, the MA1555.A.001 can achieve genuine cm-level accuracy.


Cable and connectors are customizable. Please contact your regional Taoglas customer support team for further information.

2. Specification

GNSS Frequency Bands					
GPS	L1 1575.42 MHz	L2 1227.6 MHz	L5 1176.45 MHz		
	■	■	■		
GLONASS	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz		
	■	■	■		
Galileo	E1 1575.24 MHz	E5a 1176.45 MHz	E5b 1201.5 MHz	E6 1278.75 MHz	
	■	■	■	■	
BeiDou	B1C 1575.42 MHz	B1I 1561 MHz	B2a 1176.45 MHz	B2b 1207.14 MHz	B3 1268.52 MHz
	■	■	■	■	■
QZSS (Regional)	L1 1575.42 MHz	L2C 1227.6 MHz	L5 1176.45 MHz	L6 1278.75e6	
	■	■	■	■	
IRNSS (Regional)	L5 1176.45 MHz				
	■				
SBAS	L1/E1/B1 1575.42 MHz	L5/B2a/E5a 1176.45 MHz	G1 1602 MHz	G2 1248 MHz	G3 1207 MHz
	■	■	■	■	■

Lower Bands

Upper Bands

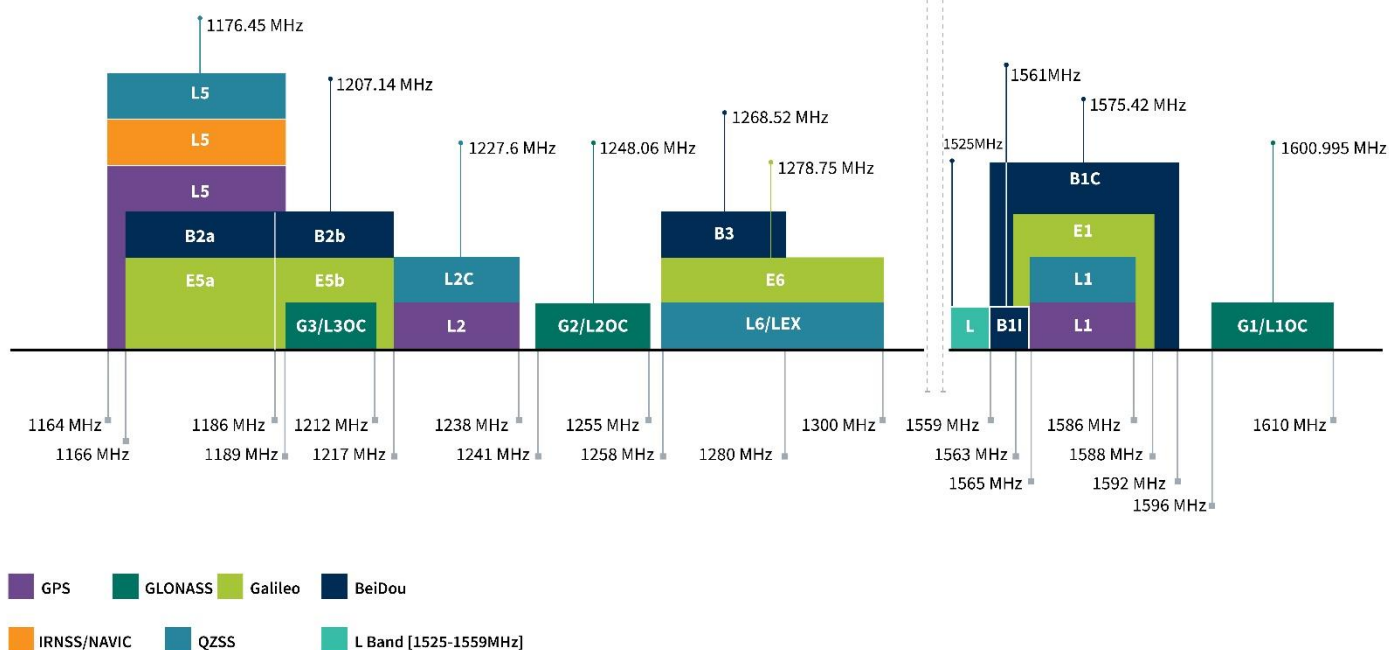

GNSS Electrical						
Frequency (MHz)	1176.45	1227.6	1278.75	1561	1575.42	1602
VSWR (max.)	2:1	2:1	2:1	2:1	2:1	2:1
Efficiency(%)	48	53	46	44	48	50
Peak Gain(dBi)	2.65	0.20	3.16	3.45	4.03	3.96
Average Gain (dB)	-3.16	-2.70	-3.36	-3.58	-3.16	-3.03
Axial Ratio (dB)	1.12	0.89	1.18	2.34	2.27	2.48
Group Delay Mean (ns)	12.15	5.99	11.11	34.35	26.89	30.67
Polarization	RHCP					
Impedance	50 Ω					
Cable	RG174					
Connector	SMA(M)					
Passive GNSS results shown are in Free space						

LNA and Filter Electrical Properties						
Frequency (MHz)	L5 1176.45	GAL E5b 1207	GPS L2 1227	L6/E6 1278.75	B1 1561	L1 1575.42
Gain (typical)	25 dB	26 dB	25 dB	22 dB	27 dB	28 dB
Noise Figure (typical)	4.0 dB	3.7 dB	3.8 dB	4.5 dB	3.1 dB	2.6 dB
Current Draw (typical)	< 20 mA					
Input Voltage	+1.8 to +5 VDC					
Out-Of-Band Attenuation (dB)	100 - 900 MHz			> 50		
	900 - 1000 MHz			> 30		
	1350 - 1520 MHz			> 25		
	1700 - 2000 MHz			> 35		
	2000 - 6000 MHz			> 45		

LTE Electrical										
Band	Frequency (MHz)	MIMO	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
5G NR/4G Band 71	617-698	MIMO 1	Free Space	48.7	-3.13	1.49	50 Ω	Linear	Omni	2W
			Ground Plane	21.2	-6.73	-0.15				
		MIMO 2	Free Space	45.1	-3.46	0.53				
			Ground Plane	18.6	-7.31	-0.47				
4G/3G Band 12,13,14,17,28,29	698-806	MIMO 1	Free Space	47.0	-3.28	1.45				
			Ground Plane	30.0	-5.23	-0.22				
		MIMO 2	Free Space	45.9	-3.39	0.74				
			Ground Plane	28.5	-5.45	-1.24				
4G/3G/NB-IoT/Cat M Band 5,8,18,19,20,26,27	824-960	MIMO 1	Free Space	52.4	-2.80	1.51				
			Ground Plane	42.5	-3.72	2.85				
		MIMO 2	Free Space	51.6	-2.88	1.29				
			Ground Plane	42.1	-3.76	3.34				
5G NR/4G Band 21,32,74,75,76	1427-1518	MIMO 1	Free Space	58.6	-2.32	2.79				
			Ground Plane	53.6	-2.71	3.00				
		MIMO 2	Free Space	56.3	-2.50	1.74				
			Ground Plane	54.0	-2.68	3.18				
4G/3G Band 1,2,3,4,9,23,25,35,39,66	1710-2200	MIMO 1	Free Space	50.8	-2.94	2.72				
			Ground Plane	50.5	-2.96	4.54				
		MIMO 2	Free Space	47.6	-3.23	1.19				
			Ground Plane	48.2	-3.17	3.54				
4G/3G Band 7,30,38,40,41	2300-2690	MIMO 1	Free Space	64.7	-1.89	4.20				
			Ground Plane	68.0	-1.67	5.65				
		MIMO 2	Free Space	64.2	-1.93	4.13				
			Ground Plane	67.0	-1.74	4.94				
5G NR/4G Band 22,42,48,77,78,79	3300-5000	MIMO 1	Free Space	53.4	-2.73	6.00				
			Ground Plane	52.1	-2.83	6.98				
		MIMO 2	Free Space	61.1	-2.14	5.44				
			Ground Plane	62.6	-2.03	8.11				
LTE5200/Wi-Fi5800	5150-5925	MIMO 1	Free Space	64.8	-1.89	7.32				
			Ground Plane	62.3	-2.05	9.29				
		MIMO 2	Free Space	41.5	-3.82	4.82				
			Ground Plane	50.5	-2.97	8.16				





5G/4G Bands						
Band Number	5GNR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA					
	Uplink	Downlink	MIMO1_Free Space	MIMO1_Ground Plane	MIMO2_Free Space	MIMO2_Ground Plane
B1	1920 to 1980	2110 to 2170	✓	✓	✓	✓
B2	1850 to 1910	1930 to 1990	✓	✓	✓	✓
B3	1710 to 1785	1805 to 1880	✓	✓	✓	✓
B4	1710 to 1755	2110 to 2155	✓	✓	✓	✓
B5	824 to 849	869 to 894	✓	✓	✓	✓
B7	2500 to 2570	2620 to 2690	✓	✓	✓	✓
B8	880 to 915	925 to 960	✓	✓	✓	✓
B9*	1749.9 to 1784.9	1844.9 to 1879.9	✓	✓	✓	✓
B11	1427.9 to 1447.9	1475.9 to 1495.9	✓	✓	✓	✓
B12	699 to 716	729 to 746	✓	✓	✓	✓
B13	777 to 787	746 to 756	✓	✓	✓	✓
B14	788 to 798	758 to 768	✓	✓	✓	✓
B17	704 to 716	734 to 746	✓	✓	✓	✓
B18	815 to 830	860 to 875	✓	✓	✓	✓
B19	830 to 845	875 to 890	✓	✓	✓	✓
B20	832 to 862	791 to 821	✓	✓	✓	✓
B21	1447.9 to 1462.9	1495.9 to 1510.9	✓	✓	✓	✓
B22*	3410 to 3490	3510 to 3590	✓	✓	✓	✓
B23*	2000 to 2020	2180 to 2200	✓	✓	✓	✓
B24	1626.5 to 1660.5	1525 to 1559	✓	✓	✓	✓
B25	1850 to 1915	1930 to 1995	✓	✓	✓	✓
B26	814 to 849	859 to 894	✓	✓	✓	✓
B27*	807 to 824	852 to 869	✓	✓	✓	✓
B28	703 to 748	758 to 803	✓	✓	✓	✓
B29	717 to 728		✓	✓	✓	✓
B30	2305 to 2315	2350 to 2360	✓	✓	✓	✓
B31	452.5 to 457.5	462.5 to 467.5	✗	✗	✗	✗
B32	1452 to 1496		✓	✓	✓	✓
B34	2010 to 2025		✓	✓	✓	✓
B35	1850 to 1910		✓	✓	✓	✓
B36	1930 to 1990		✓	✓	✓	✓
B37	1910 to 1930		✓	✓	✓	✓
B38	2570 to 2620		✓	✓	✓	✓
B39	1880 to 1920		✓	✓	✓	✓
B40	2300 to 2400		✓	✓	✓	✓
B41	2496 to 2690		✓	✓	✓	✓
B42	3400 to 3600		✓	✓	✓	✓
B43	3600 to 3800		✓	✓	✓	✓
B45	1447 to 1467		✓	✓	✓	✓
B46	5150 to 5925		✓	✓	✓	✓
B47	5855 to 5925		✓	✓	✓	✓
B48	3550 to 3700		✓	✓	✓	✓
B49	3550 to 3700		✓	✓	✓	✓
B50	1432 to 1517		✓	✓	✓	✓
B51	1427 to 1432		✓	✓	✓	✓
B52	3300 to 3400		✓	✓	✓	✓
B53	2483.5 to 2495		✓	✓	✓	✓
B65	1920 to 2010	2110 to 2200	✓	✓	✓	✓
B66	1710 to 1780	2110 to 2200	✓	✓	✓	✓
B68	698 to 728	753 to 783	✓	✓	✓	✓
B69	2570 to 2620		✓	✓	✓	✓
B70	1695 to 1710	1995 to 2020	✓	✓	✓	✓
B71	663 to 698	617 to 652	✓	✓	✓	✓
B72	451 to 456	461 to 466	✗	✗	✗	✗
B73	450 to 455	460 to 465	✗	✗	✗	✗
B74	1427 to 1470	1475 to 1518	✓	✓	✓	✓
B75	1432 to 1517		✓	✓	✓	✓
B76	1427 to 1432		✓	✓	✓	✓
B77	3300 to 4200		✓	✓	✓	✓
B78	3300 to 3800		✓	✓	✓	✓
B79	4400 to 5000		✓	✓	✓	✓
B85	698 to 716	728 to 746	✓	✓	✓	✓
B87	410 to 415	420 to 425	✗	✗	✗	✗
B88	412 to 417	422 to 427	✗	✗	✗	✗

Wi-Fi Electrical										
Band	Frequency (MHz)	MIMO	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Max. input power
Wi-Fi2 2.4 GHz	2400-2500	MIMO 1	Free Space	55.4	-2.57	2.48	50 Ω	Linear	Omni	2W
			Ground Plane	59.4	-2.26	4.53				
		MIMO 2	Free Space	51.2	-2.91	2.82				
			Ground Plane	55.6	-2.55	3.97				
Wi-Fi5 5 GHz	5150-5850	MIMO 1	Free Space	61.2	-2.13	5.88				
			Ground Plane	55.2	-2.58	7.51				
		MIMO 2	Free Space	54.4	-2.64	5.43				
			Ground Plane	43.8	-3.59	6.67				
Wi-Fi - 6GHz	5925-7125	MIMO 1	Free Space	59.0	-2.29	6.15				
			Ground Plane	56.9	-2.45	9.06				
		MIMO 2	Free Space	65.5	-1.84	6.01				
			Ground Plane	64.0	-1.94	8.75				

Mechanical	
Dimensions	Ø161.3mm * 67mm
Weight	535g
Material	PC
Connector	SMA (M)
Cable	RG-174 (Staggered lengths see ME drawing)

Environmental	
Protection	IP67
Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH
RoHS Compliant	Yes
REACH Compliant	Yes

3. Mechanical Drawing

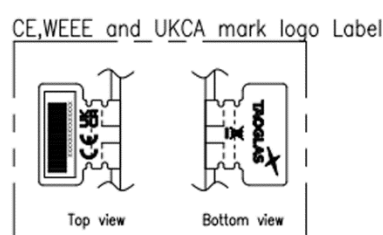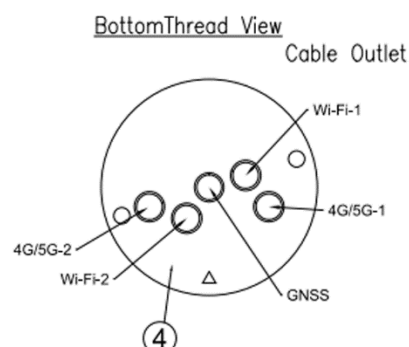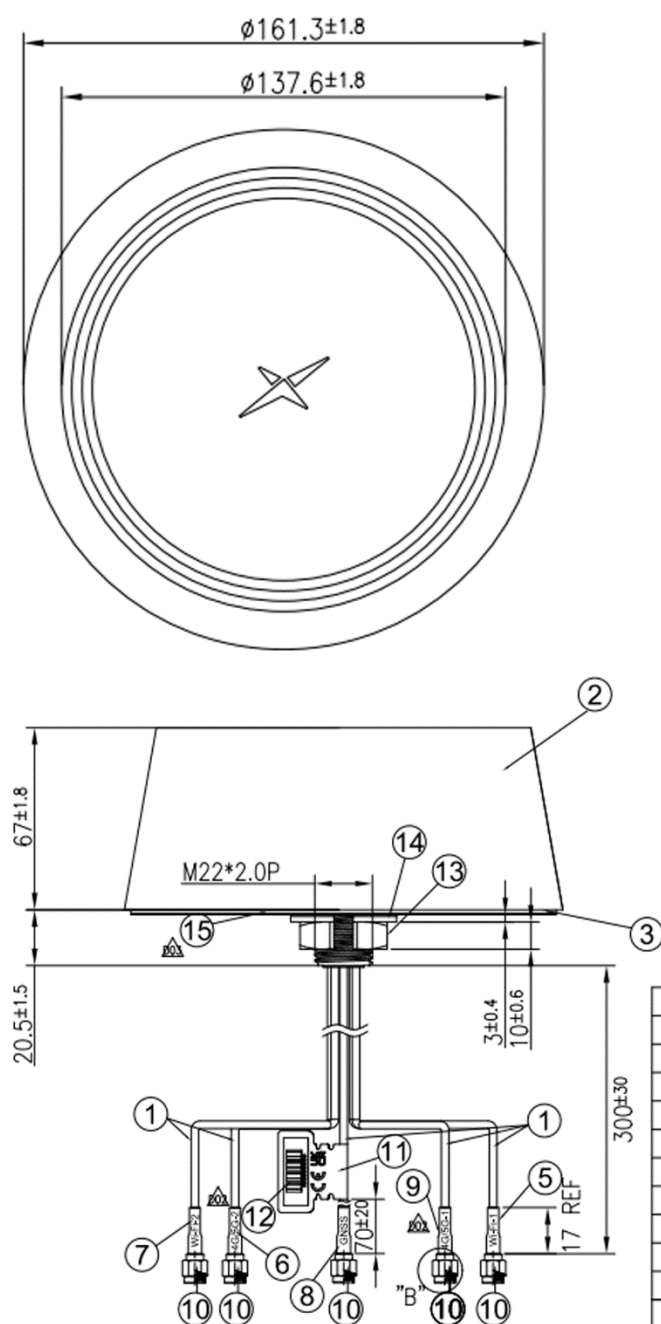

	Name	Material	Finish	QTY
1	RG174 Coaxial Cable	PVC	Black	5
2	Top Plastic Shell	PC/SABIC EXL1414	Black	1
3	Bottom Plastic	PC/SABIC EXL1414	Black	1
4	Cable Rubber	Silicone Rubber	Black	1
5	Heat Shrink Tube (Wi-Fi-1)	PE	Yellow Tube/Black Text	1
6	Heat Shrink Tube (4G/5G-2)	PE	Red Tube/White Text	1
7	Heat Shrink Tube (Wi-Fi-2)	PE	Yellow Tube/Black Text	1
8	Heat Shrink Tube (GNSS)	PE	Blue Tube/White Text	1
9	Heat Shrink Tube (4G/5G-1)	PE	Red Tube/White Text	1
10	SMA(M)ST for RG174/RG316	Brass	Au Plated	5
11	CE, WEEE and UKCA mark logo Label	PEPA	White	1
12	Barcode Label	PET	White	1
13	Nut Steel M22xP2.0xH10 Cut	Steel/S45C	Zn-Ni Plated	1
14	Washer_Cut	Steel/S45C	Zn-Ni Plated	1
15	Double sided adhesive	E4382 +3M 9448 2.5T	Black Foam/White Liner	1

4. Installation Instructions

A Introduction

The Taoglas SynergyX is an external permanent mount combination antenna that can be provided with combinations of 5G/4G, active GNSS with front end saw and dual-band Wi-Fi. The SynergyX is available with two versions of the enclosure, one designed specifically for the Ford Interceptor, both supplied with 3M adhesive, along with an M22 threaded boss for surface attachment. The SynergyX is ideal for vehicle panels of up to 6mm(0.23") thick with a threaded boss length of 20.5mm(0.81"). The SynergyX is IP67 rated and includes an O-Ring to seal from any water ingress.



Electrical Safety

The SynergyX contains an active GPS/GNSS antenna.
Rated voltage: 3-5VDC Rated current: 20mA maximum

The supply to this device must be provided with overcurrent protection of 1A maximum.

Power consumption@1.8V (mA) 8.7 mA

Power consumption@3.0V (mA) 9.0 mA

Power consumption@5.5V (mA) 11 mA

B Mounting & Location

For prime performance, the SynergyX is recommended to be fitted on a conductive metal panel. When fitting on a non-metallic panel, a conductive metal ground plane of suitable size should be fitted underneath the mounting panel to achieve a better level of performance. Optimum ground plane size is 300mm x 300mm(11.8" x 11.8"). When mounting on a vehicle roof panel ensure to mount on a flat surface, and measure for central position. Care should be taken to mount the SynergyX antenna as far as possible from other roof-mounted features such as the aircon unit, light bar etc.




Sealing

In order to ensure that the installation is properly sealed against the mounting surface care must be taken regarding curvature of the mounting panel. It is highly recommended to install the antenna on a clean, flat and level surface. After installation the compression of the rubber boot against the mounting panel should be checked and a small bead of neutral cure silicone sealant can be applied around the periphery of the mounting boot if required.

C Surface Preparation

When preparing to drill the hole, mask the area around the hole position to protect the surface. Drill a pilot hole and increase the hole size to $\varnothing 24\text{mm}$ ($\frac{7}{8}"$). Ensure the drill bit does not contact the headliner. Deburr and clean the area around the hole carefully removing all waste.

Remove paint and primer from under panel surface to ensure adequate contact with washer and nut. Apply petroleum jelly or paint around cut edge of the hole to prevent corrosion



D Adhesive Patch

On the underside of the antenna there is a 3M adhesive patch. Peel away the 3M adhesive protection and feed the cables through the hole. Position the antenna over the hole and press down onto the panel with pressure. This adhesion will make ensure will be securely mounted and will also allow for extremely minimal curvature on the roof of a vehicle.



E Securing the Mount

A split nut is used to easily fit onto the thread through the cables. The nut is attached from the underside of the panel, it should easily twist onto the thread and then secured in place with a final tighten with a spanner. After tightening, double check the antenna to make sure that it is properly secured but take care not to over tighten, damaging the threads on the screw.



F Cable Routing and Connection

The Cables supplied are RG-174 for the GNSS feed and TGC-200 for the other feeds. The heatshrink will denote which cable is which for ease of installation. Connect each individual connector to the correct port of the router, if any cable is unused please fit a 50Ω terminator to the individual connection.



G Notices



Caution

To comply with FCC RF Exposure requirements in section 1.1310 of the FCC Rules, antennas used with this device must be installed to provide a separation distance of at least 20 cm from all persons to satisfy RF exposure compliance.



Warning

Do not operate the equipment in an explosive atmosphere.



European Waste Electrical and Electronic Equipment Directive 2012/19/EU

Please ensure that your old Waste Electricals and Electronics are recycled do not throw them away into standard waste.



Hazardous Substances Directive (RoHS) 2011/65/EU / 2015/863/EU Radio Equipment Directive (RED) 2014/53/EU

Harmonised Standards and References:

EN 301 489-1 (V2.2.3): ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;
Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility

Waiver: This document represents information compiled by Taoglas to the best of our current knowledge. This is not intended to be used as a representation or warranty of fitness of the products described for any particular purpose. This document details guidelines for general information purposes only. When planning installations, always seek specialist advice and ensure that the products are always installed by a properly qualified installer in accordance with applicable regional laws and regulations.


All copyrights, trademarks and any other intellectual property rights related are owned by Taoglas Group Holdings Limited.

5. Packaging

1pc MA1555.A.001 per PE Bag
Weight: 535g



8pcs MA1555.A.001 per Carton
Carton Dimensions: 360*360*310mm
Weight: 4.5Kg

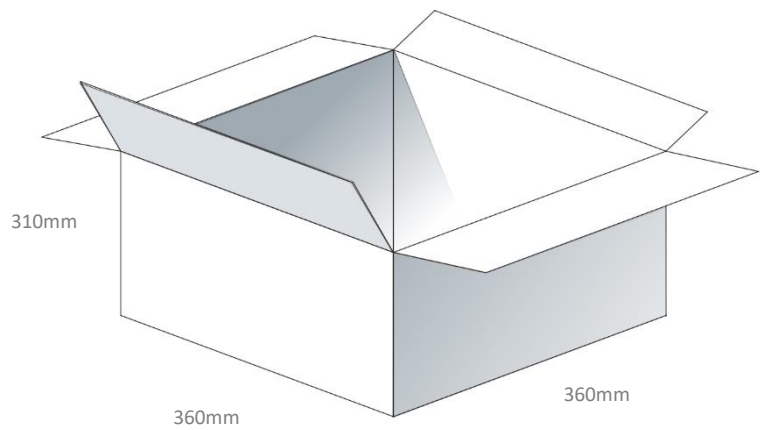


6. Antenna Characteristics

6.1 Test Setup


AUT




Vector Network Analyzer

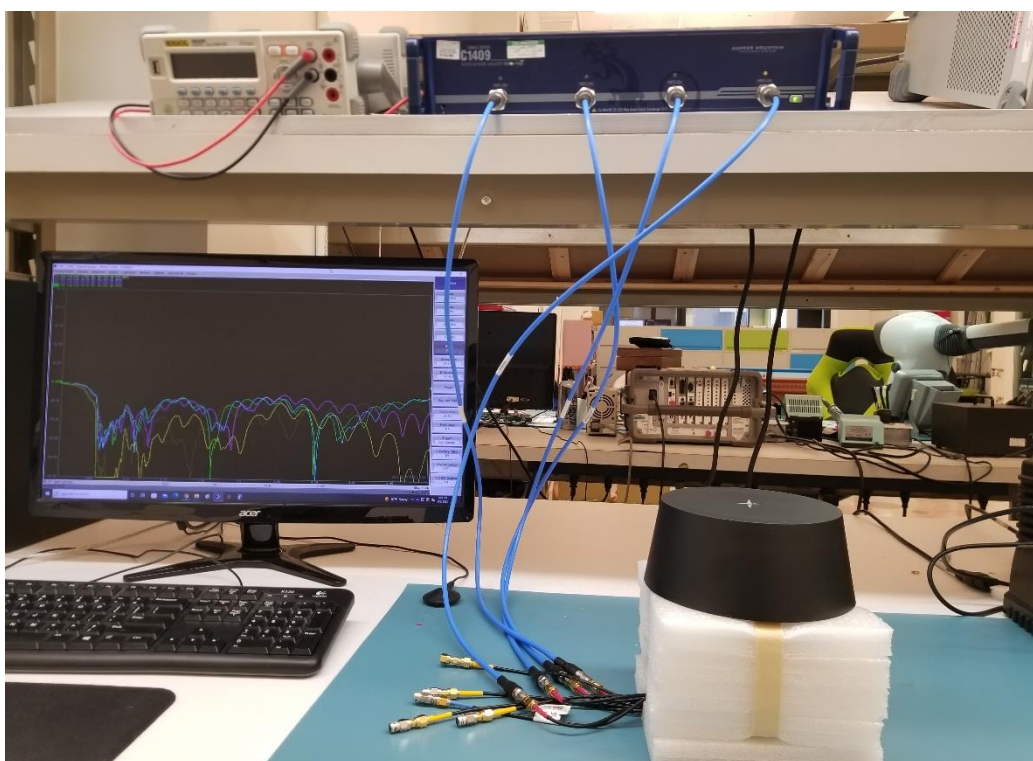


6.1 GNSS - Return Loss

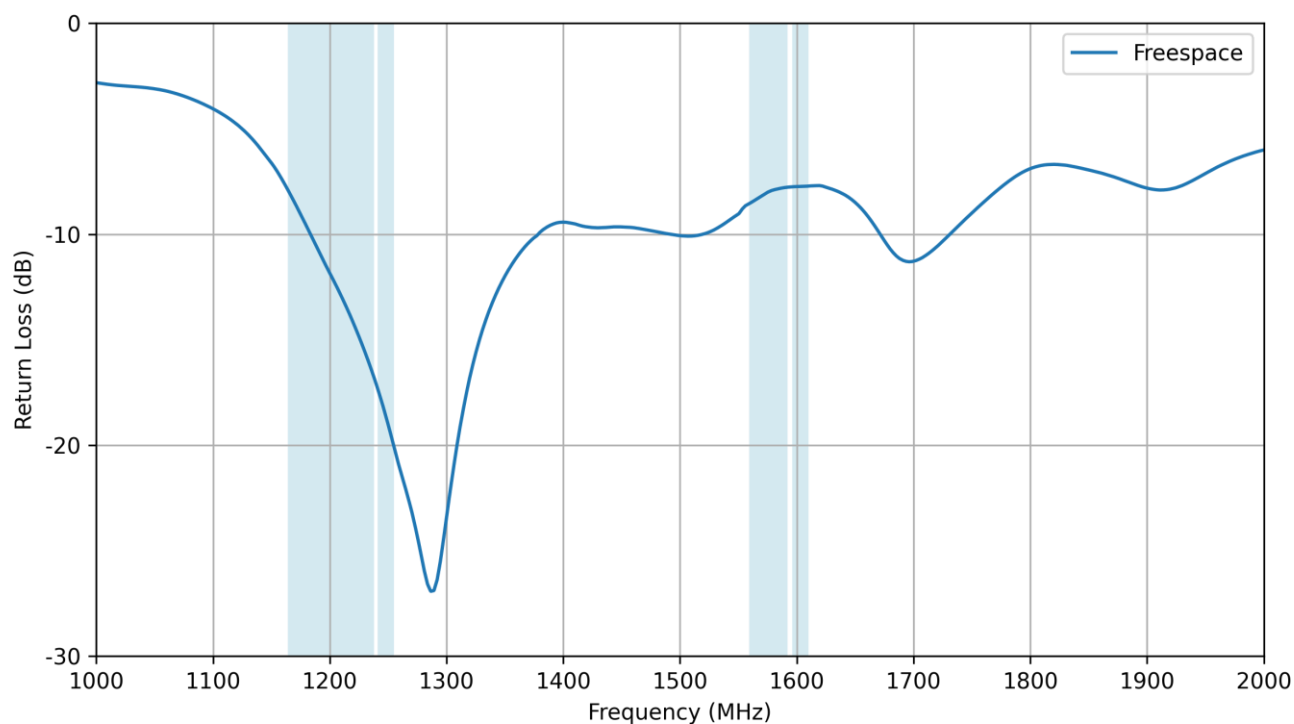


6.2 GNSS - VSWR

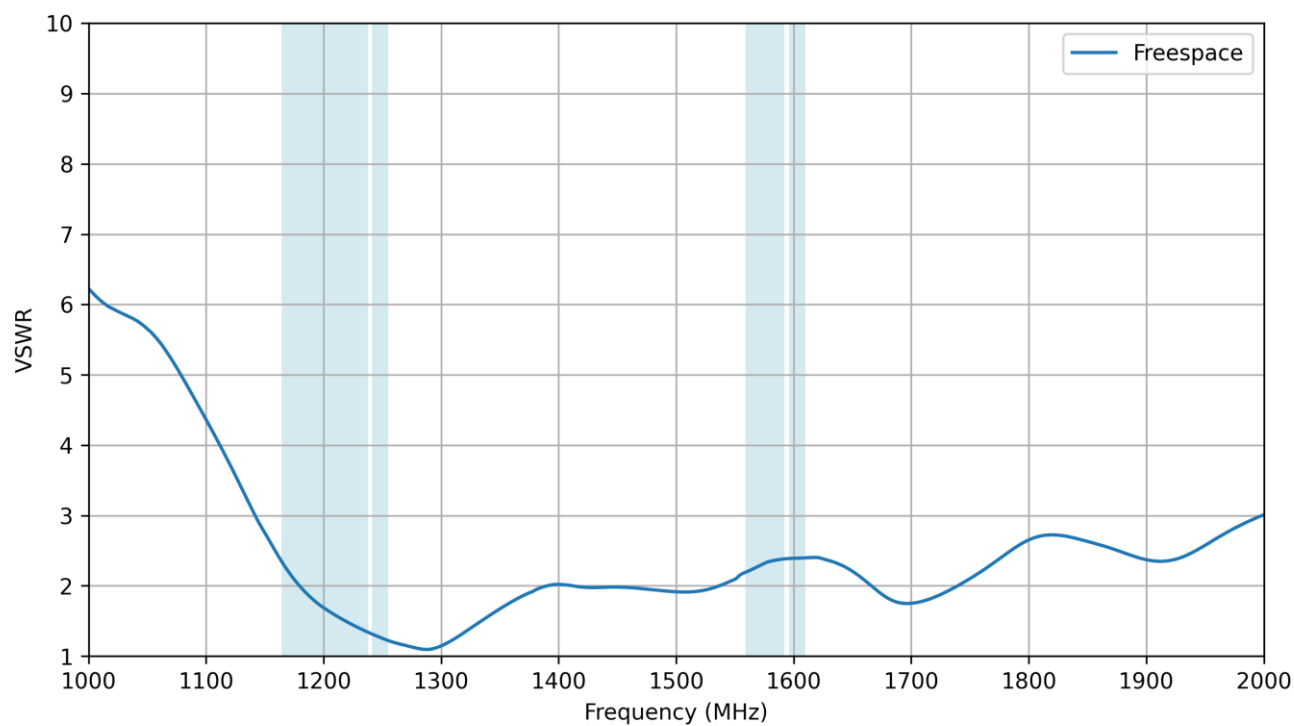


6.3 GNSS - Peak Gain

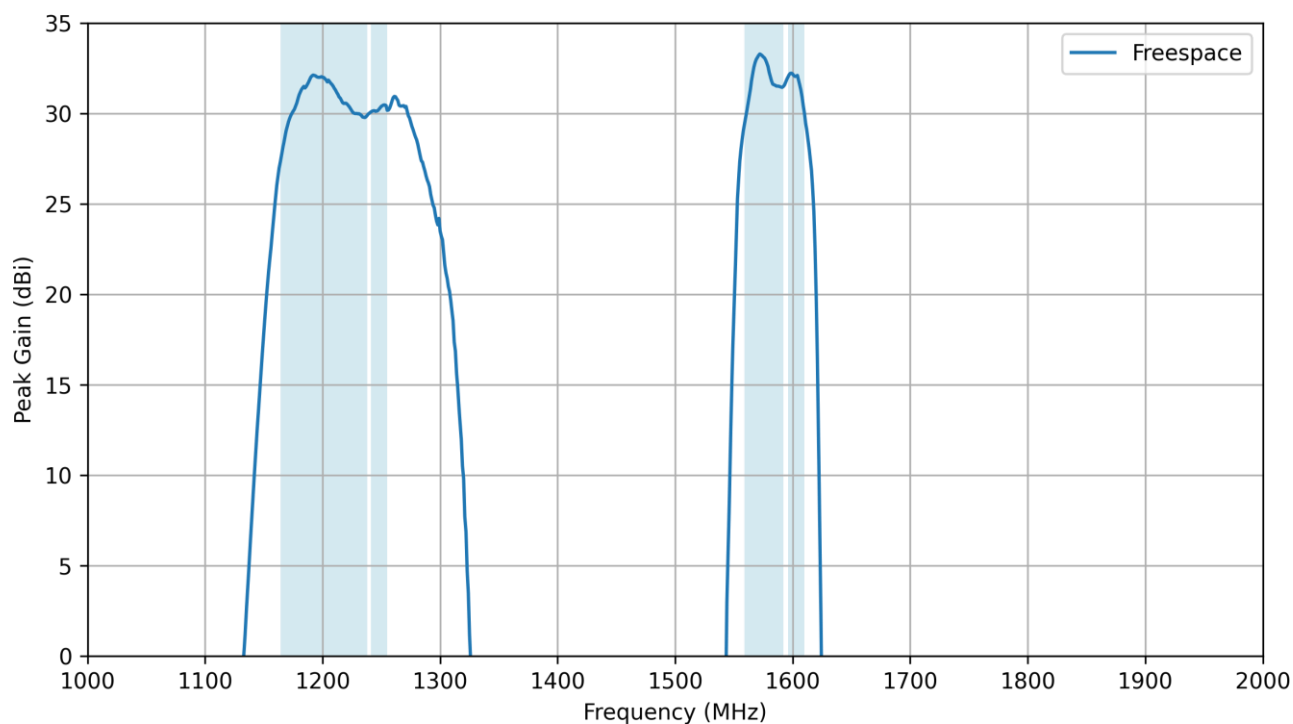


6.4 GNSS - Axial Ratio

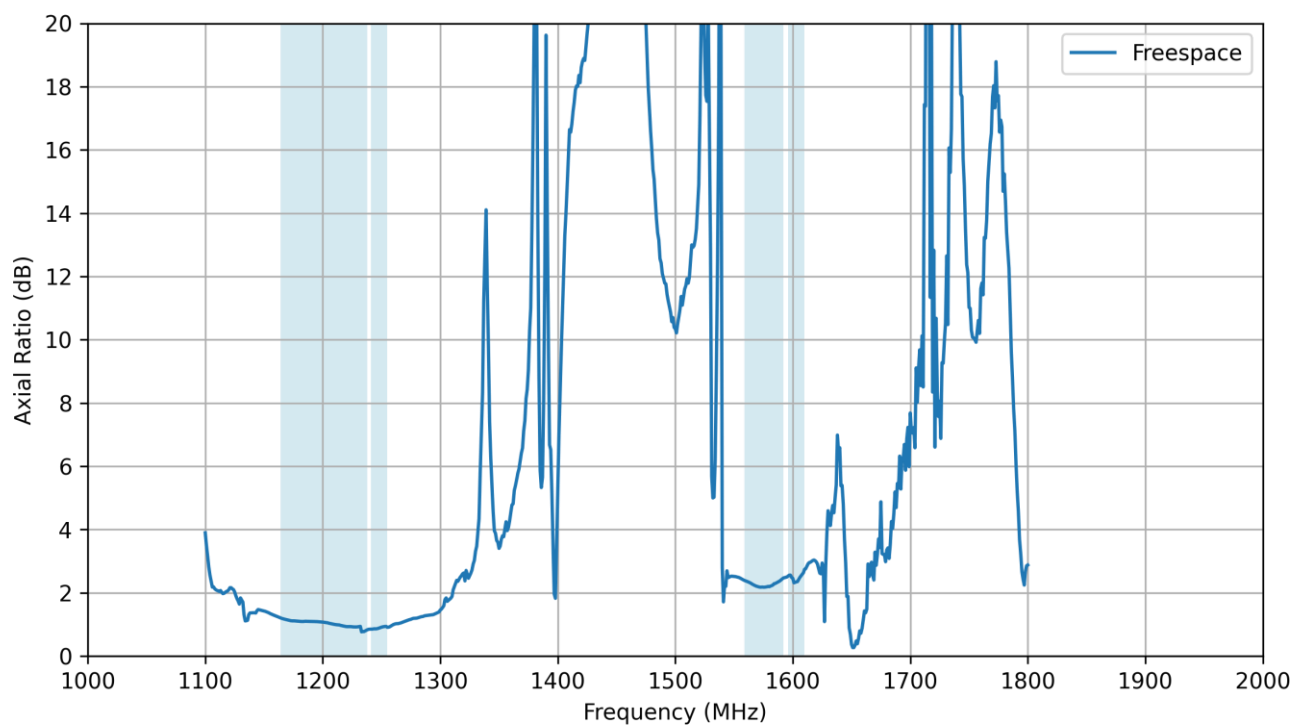


6.5 GNSS - Axial Ratio vs Angle for Phi=0

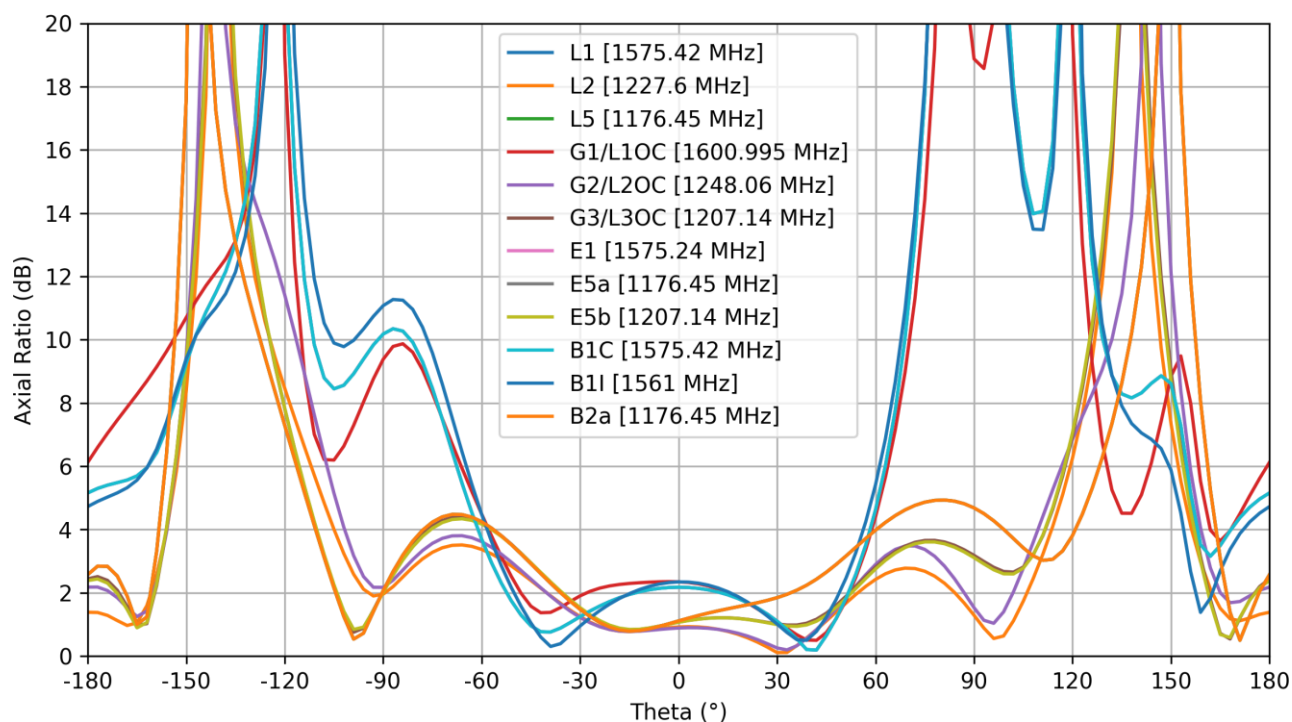


6.6 GNSS - Axial Ratio vs Angle for Phi=90

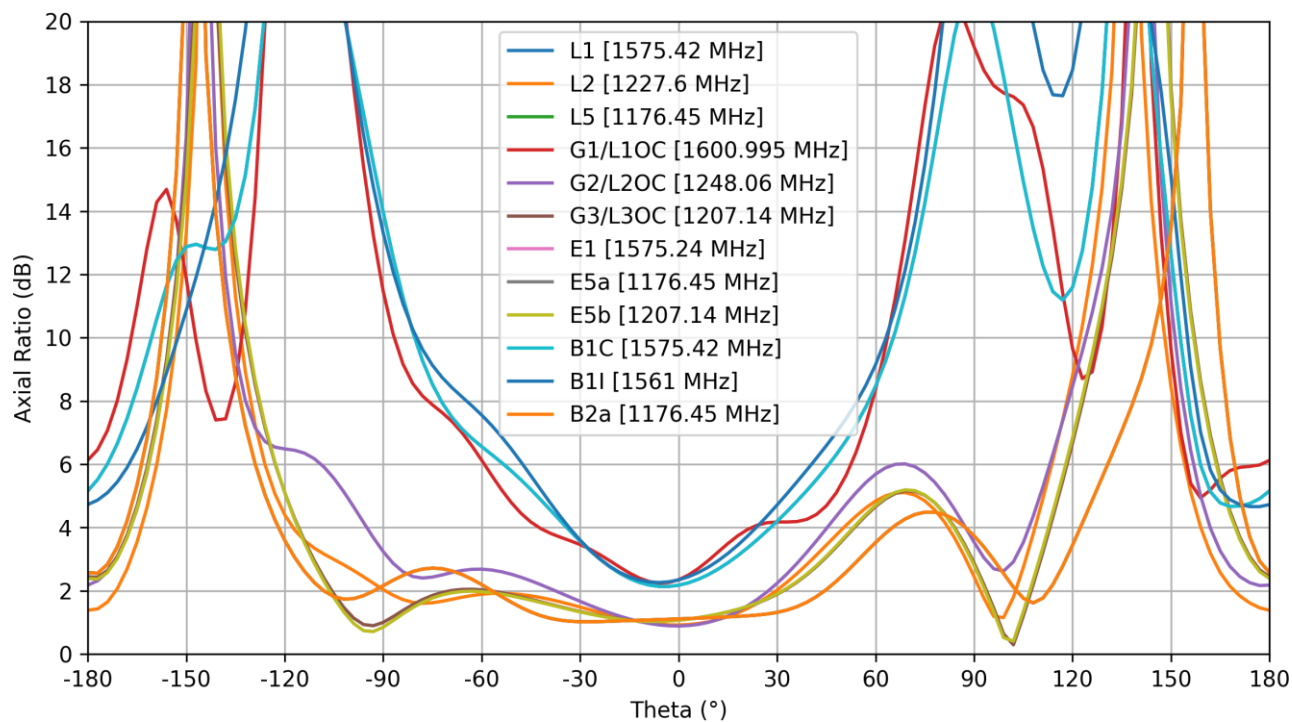


6.7 GNSS - Group Delay

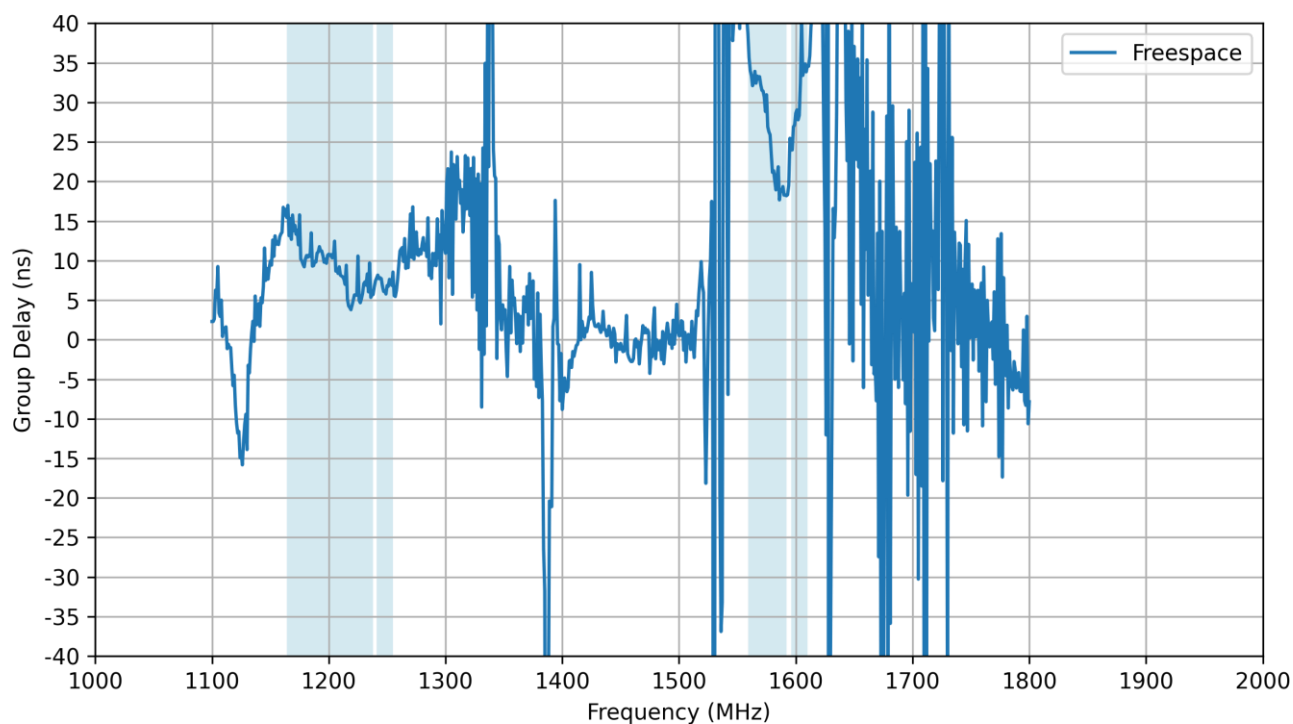


6.8 LTE - Return Loss

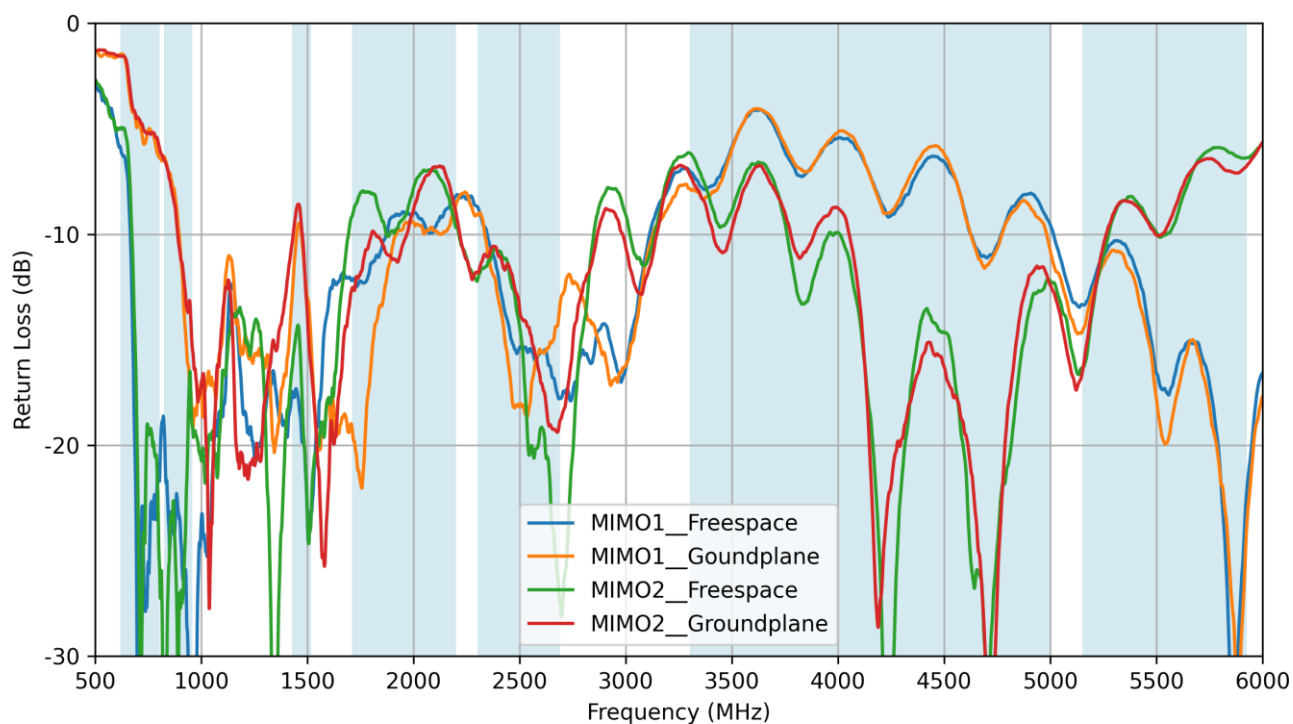


6.9 LTE - VSWR

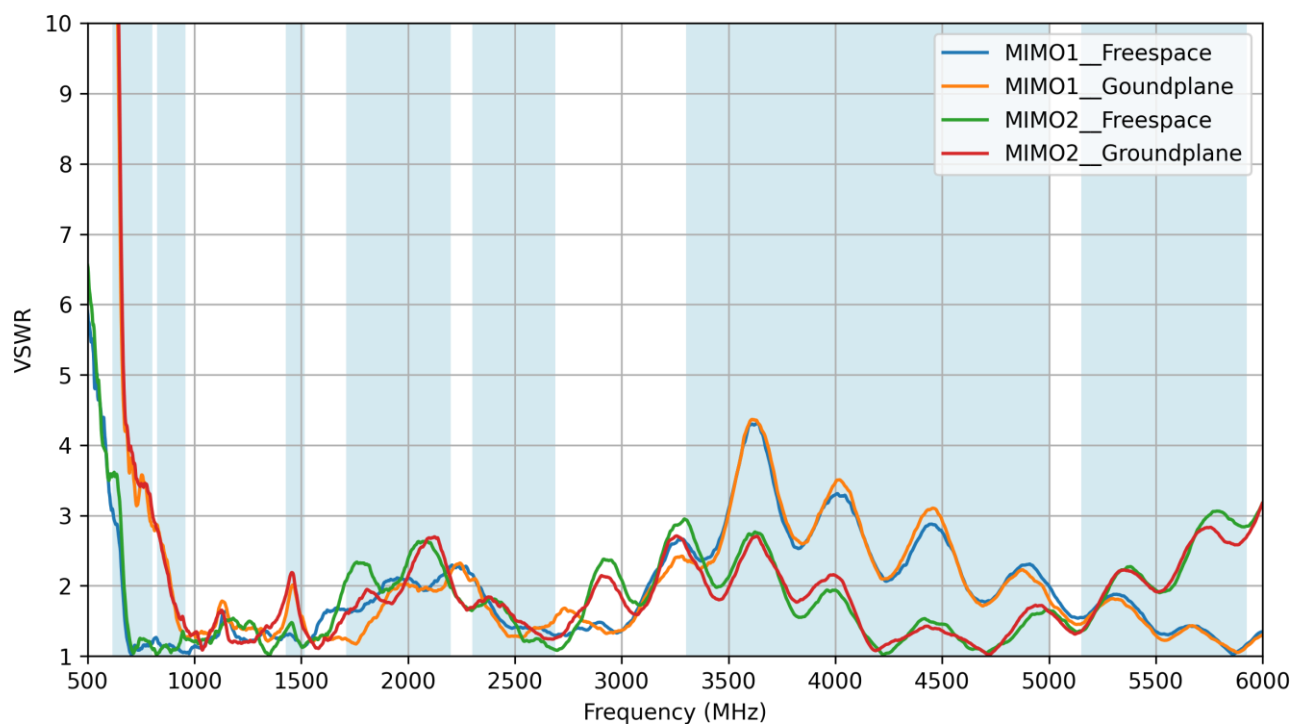


6.10 LTE - Isolation

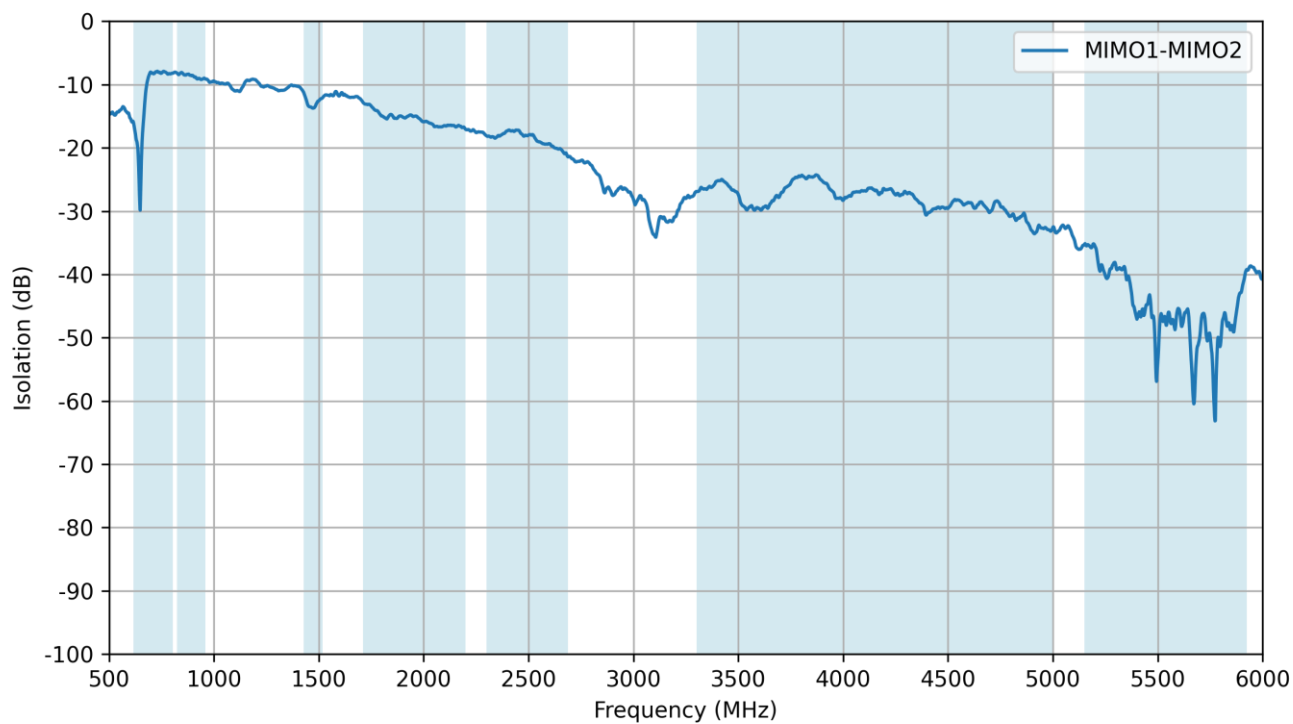


6.11 LTE - Efficiency

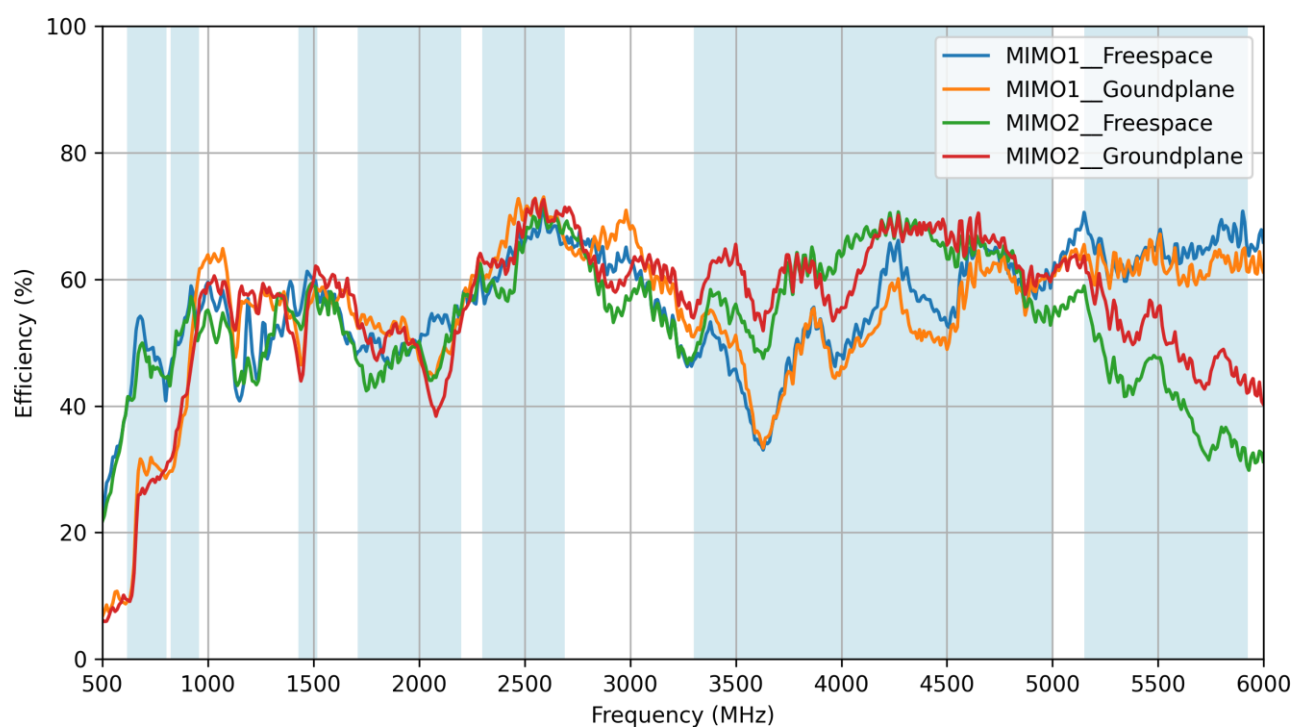


6.12 LTE - Average Gain

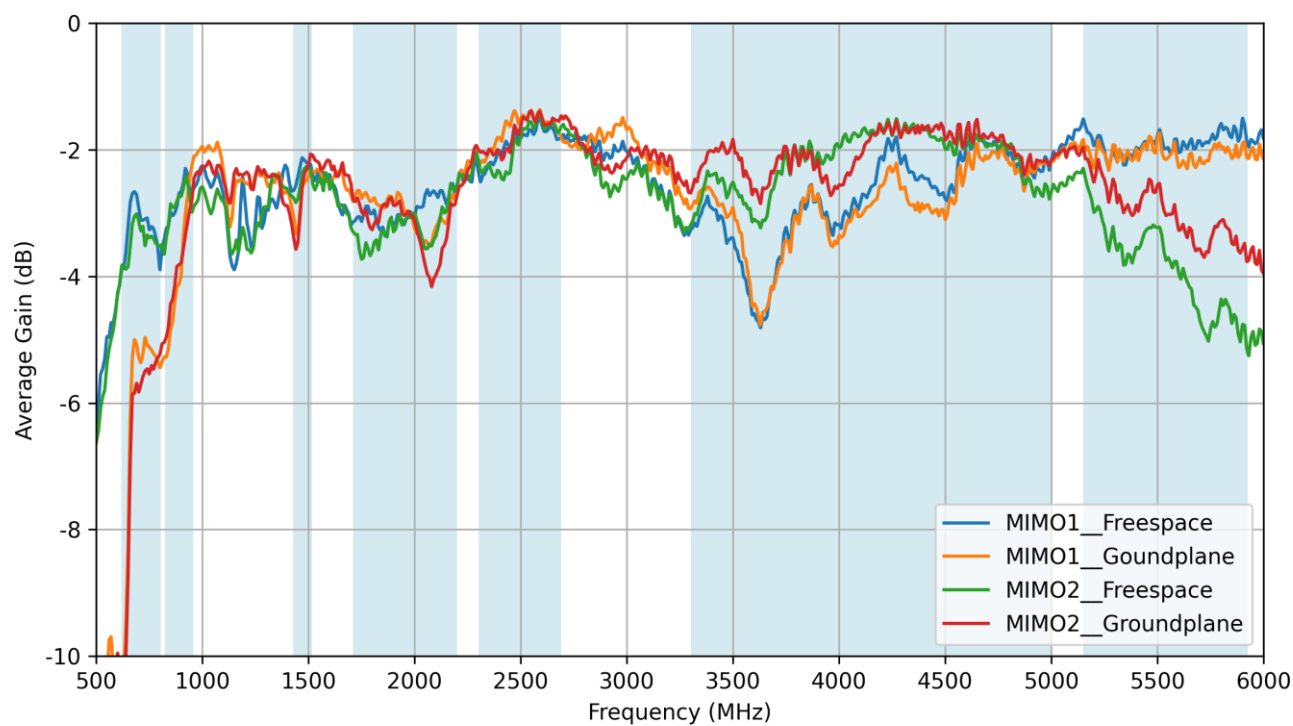


6.13 LTE - Peak Gain

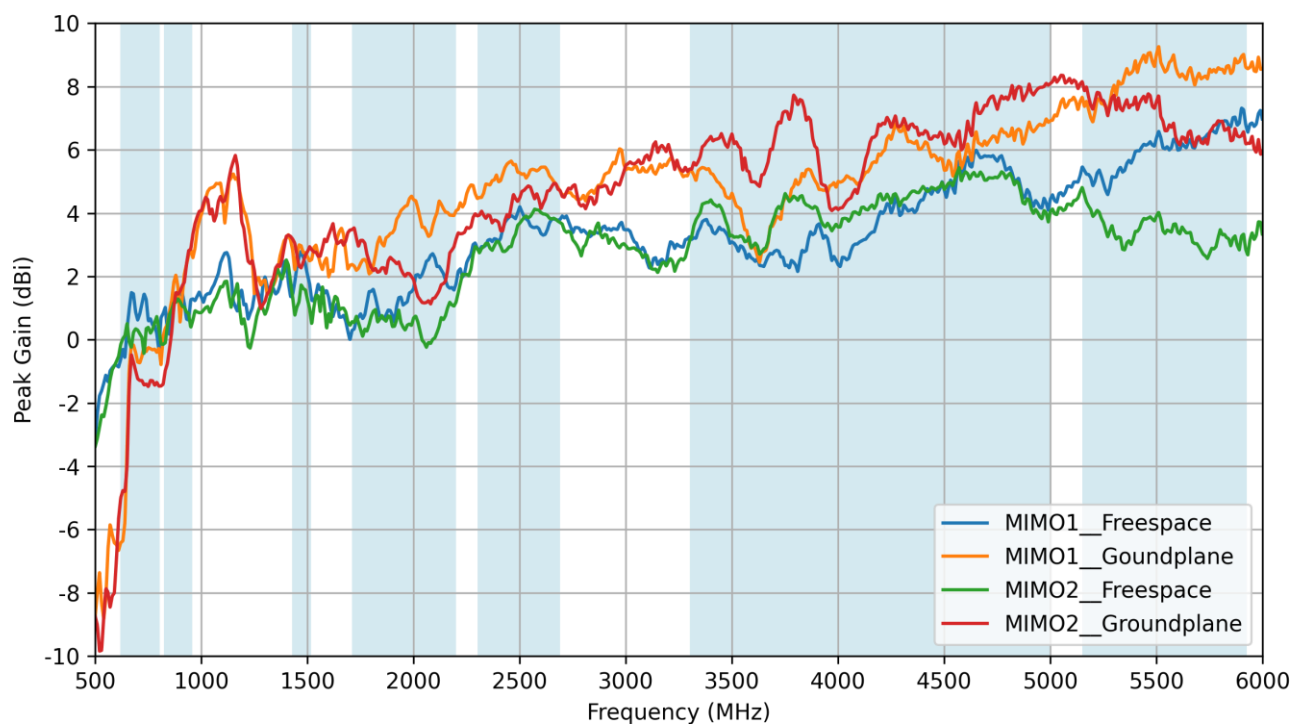


6.14 Wi-Fi - Return Loss

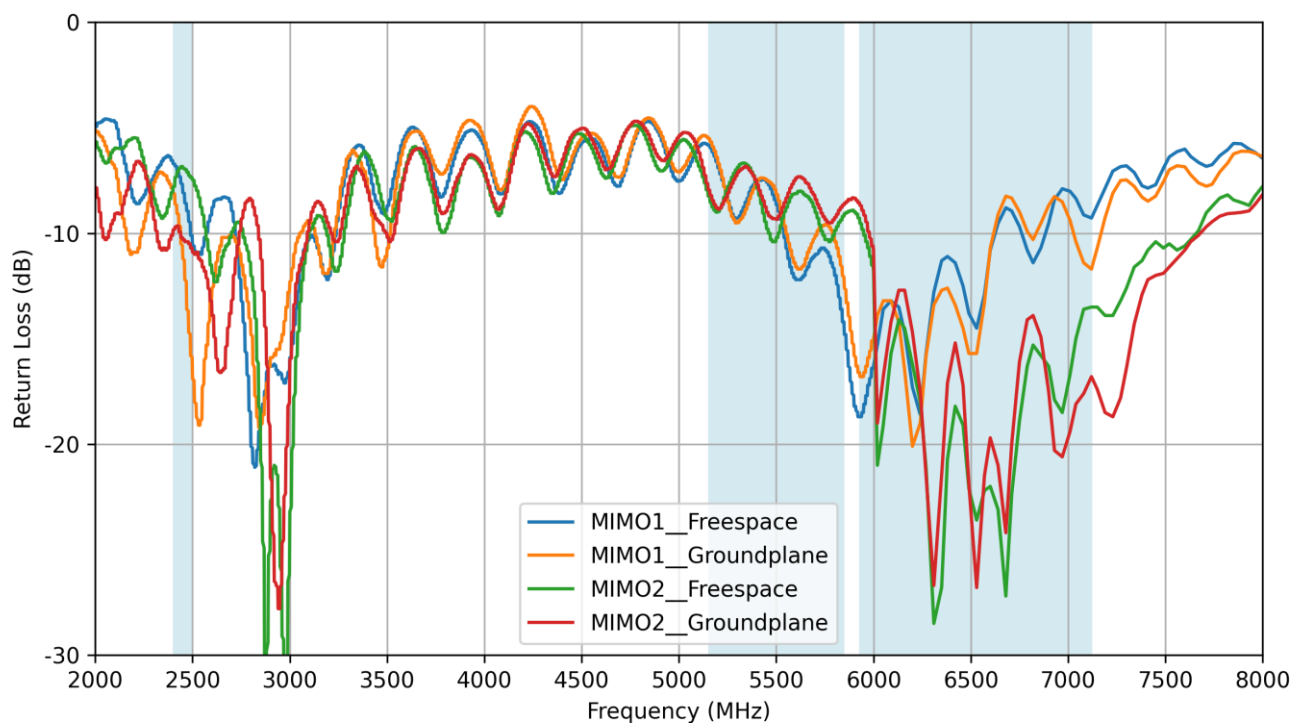


6.15 Wi-Fi - VSWR

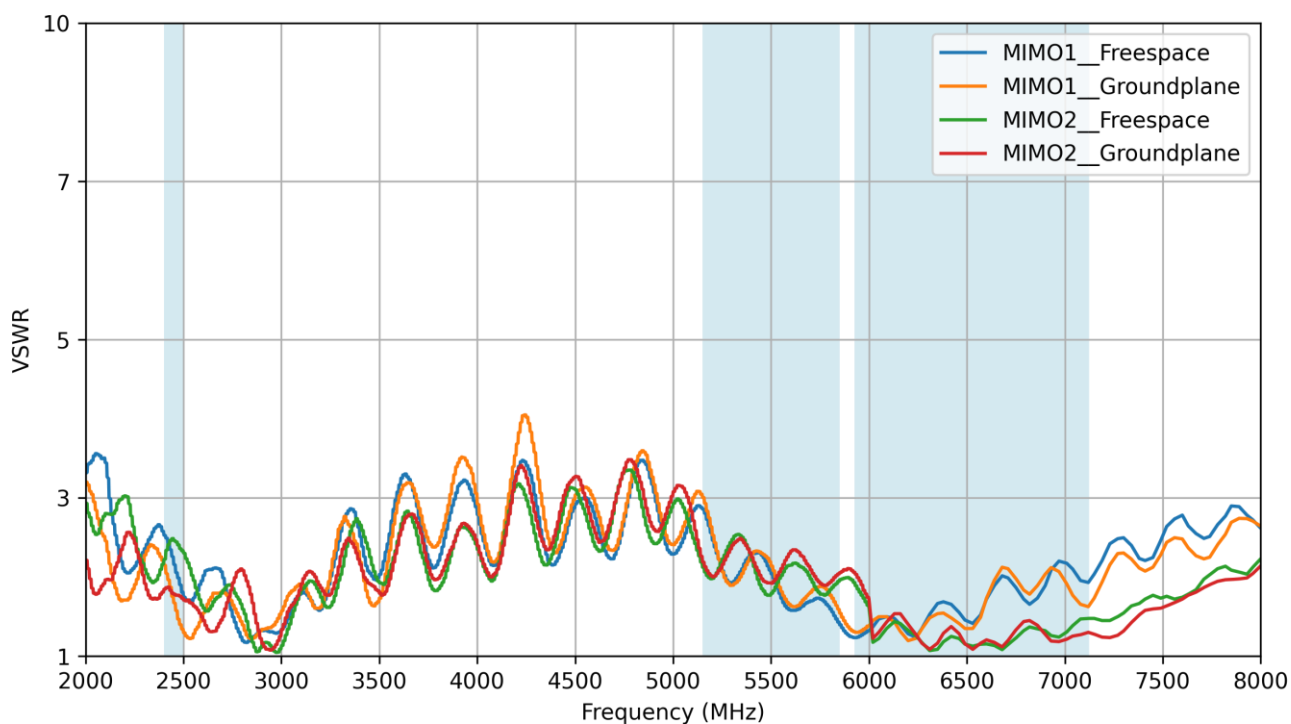


6.16 Wi-Fi - Isolation

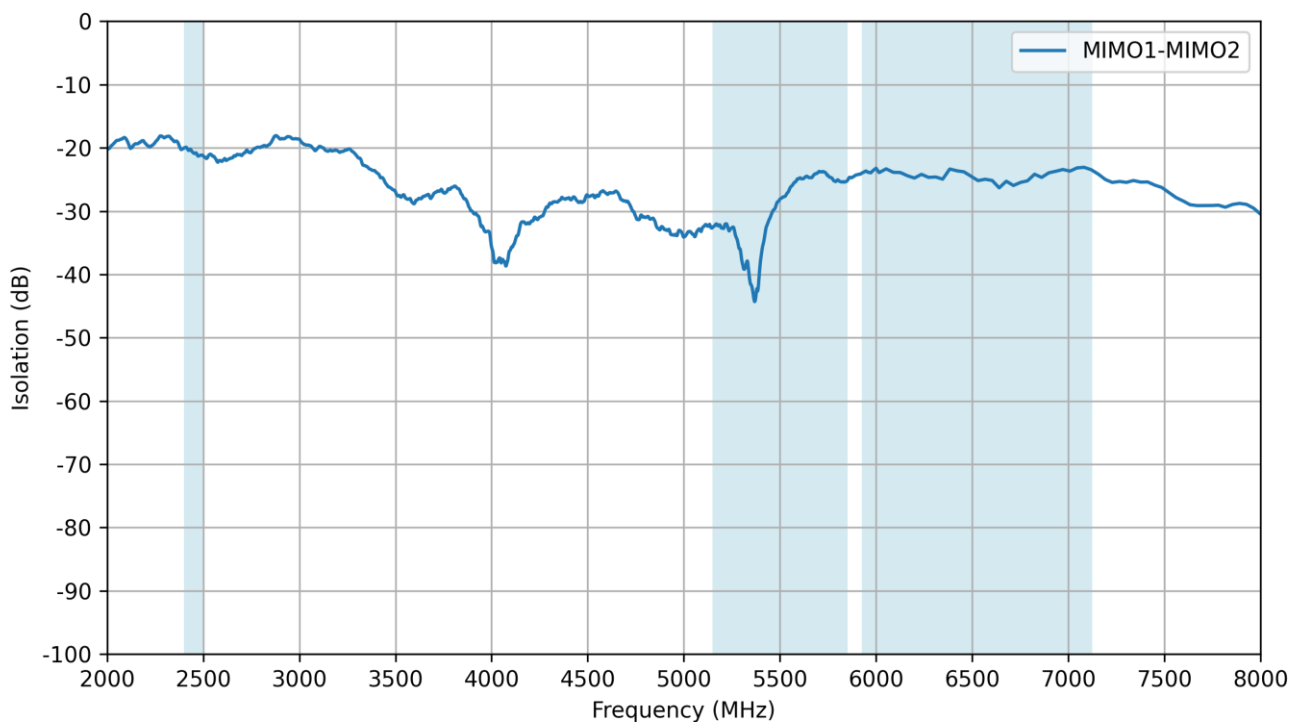


6.17 Wi-Fi - Efficiency

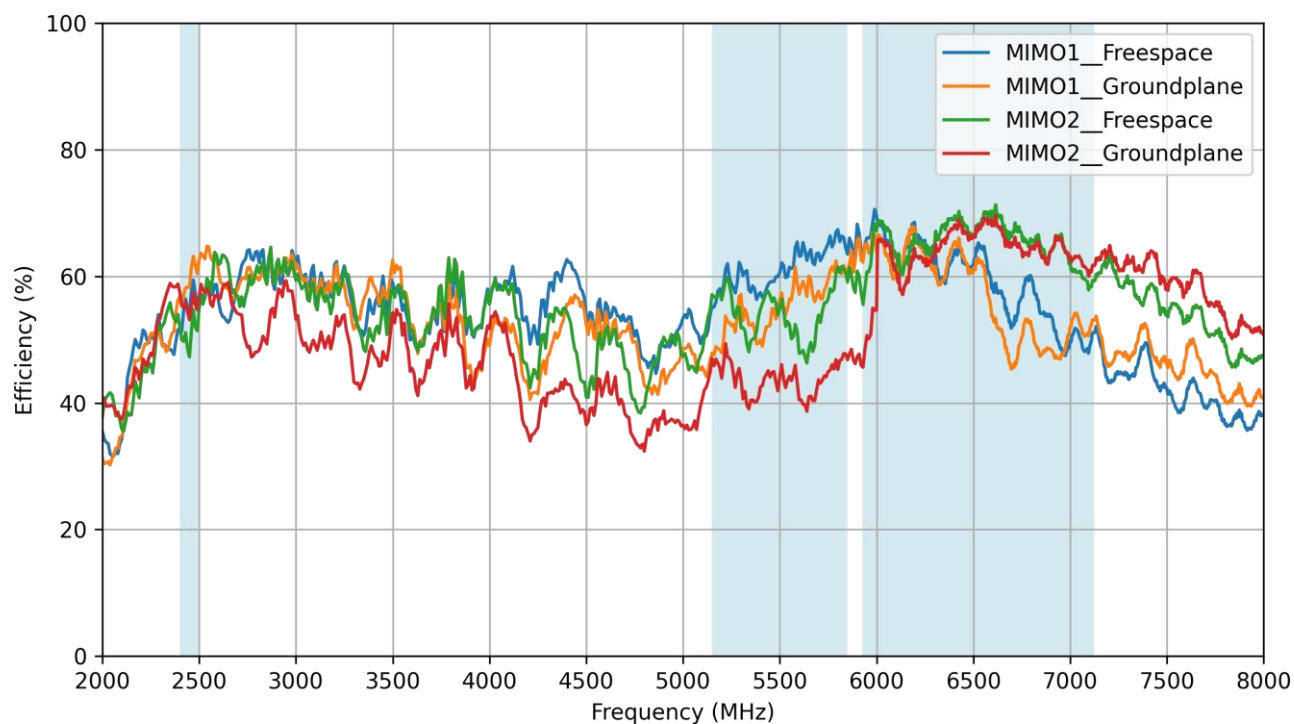

6.18 Wi-Fi - Average Gain



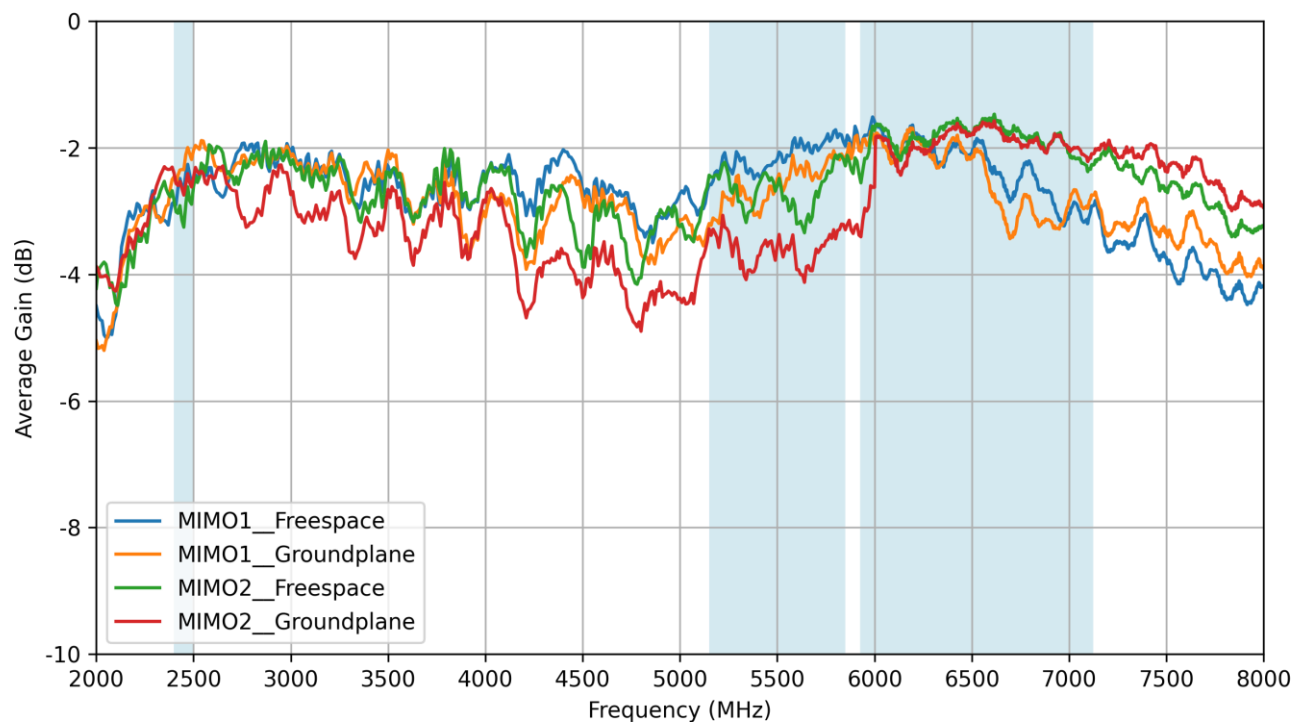


6.19 Wi-Fi - Peak Gain

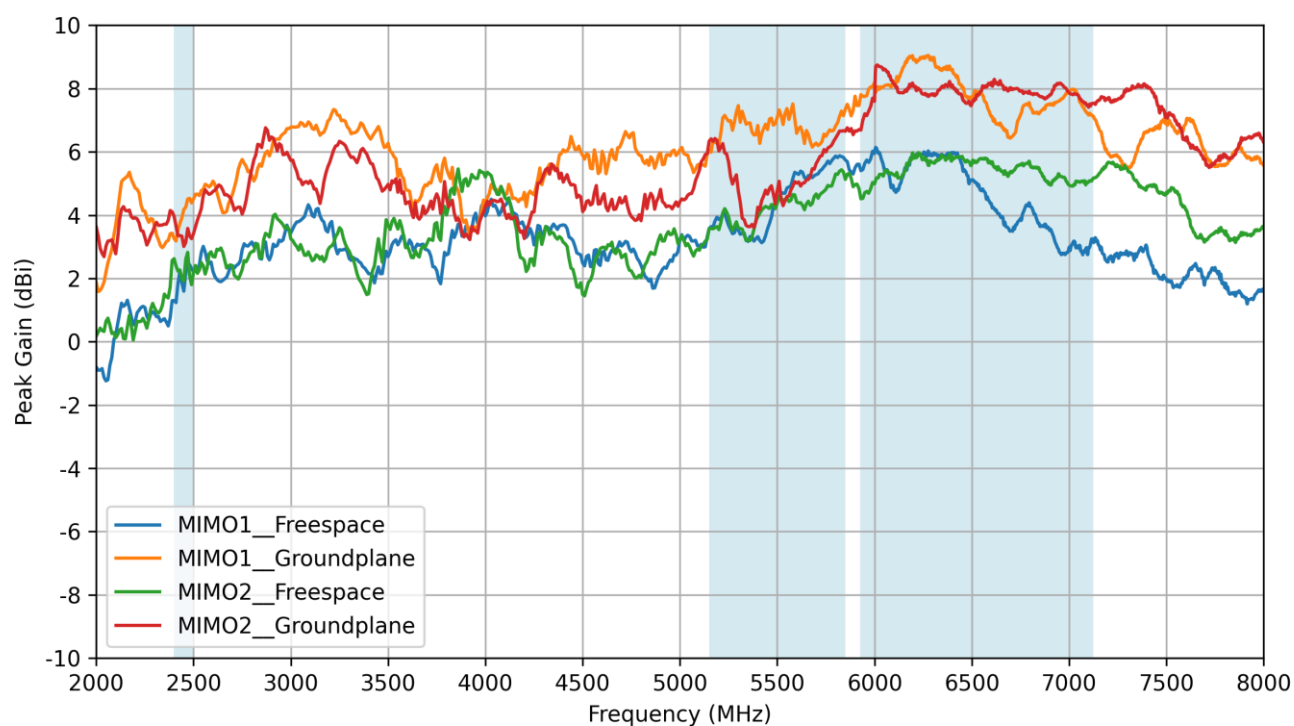

7. Radiation Patterns

7.1 Test Setup

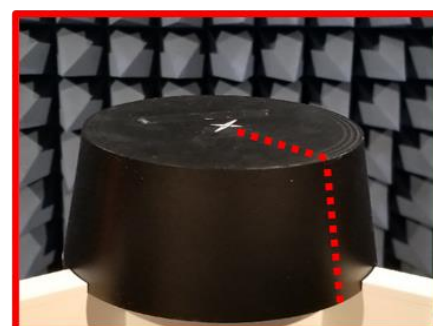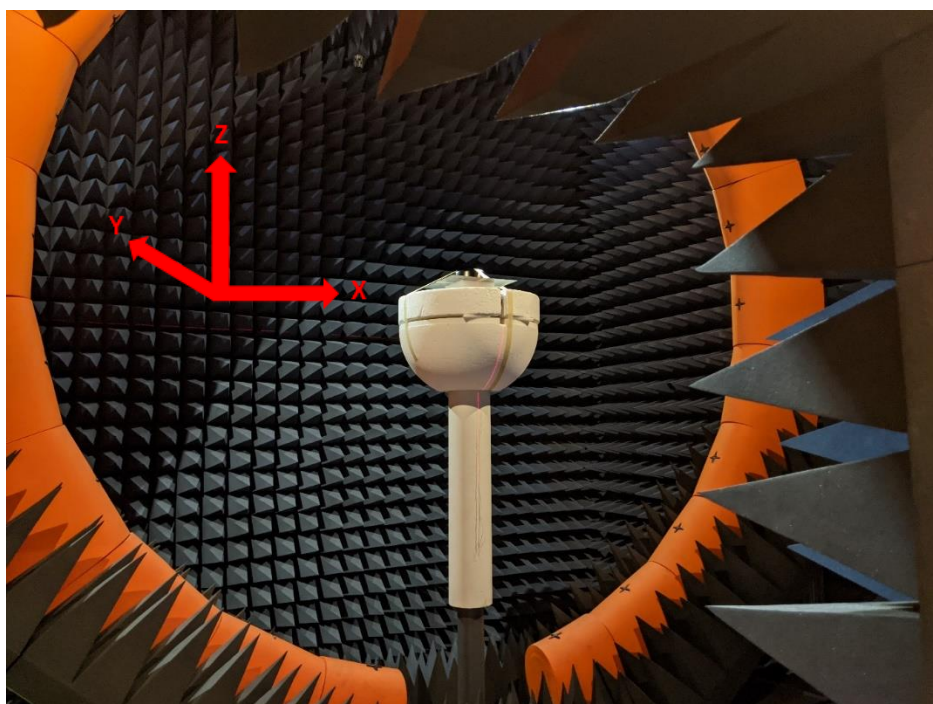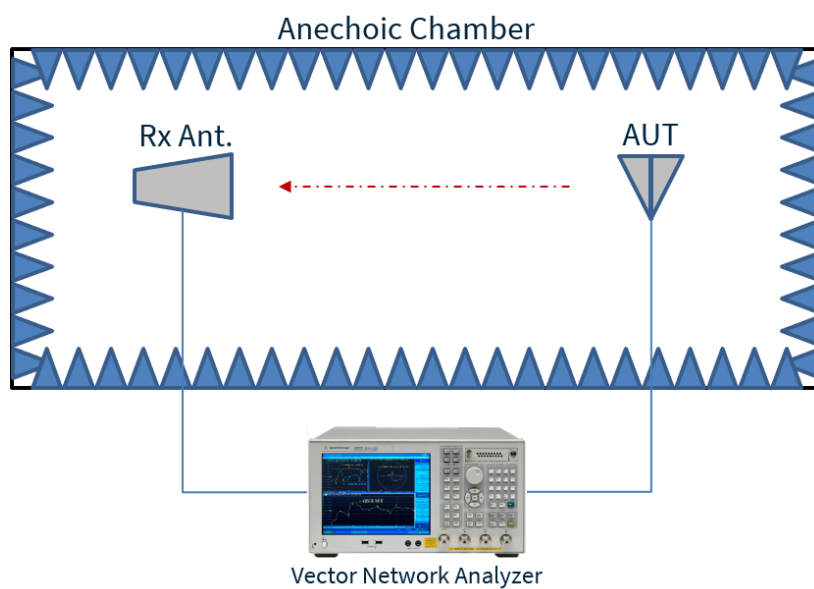



Y-Axis Location.





Underside-notch.

Antenna tested with underside-notch/logo centered along Y-Axis.



7.1 GNSS Free Space Patterns at 1575 MHz

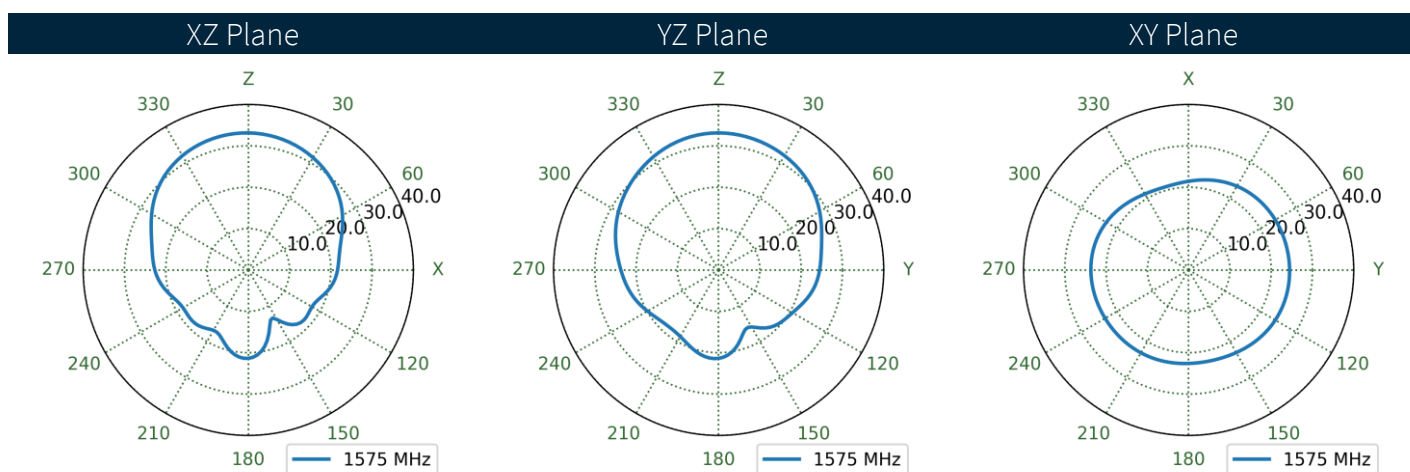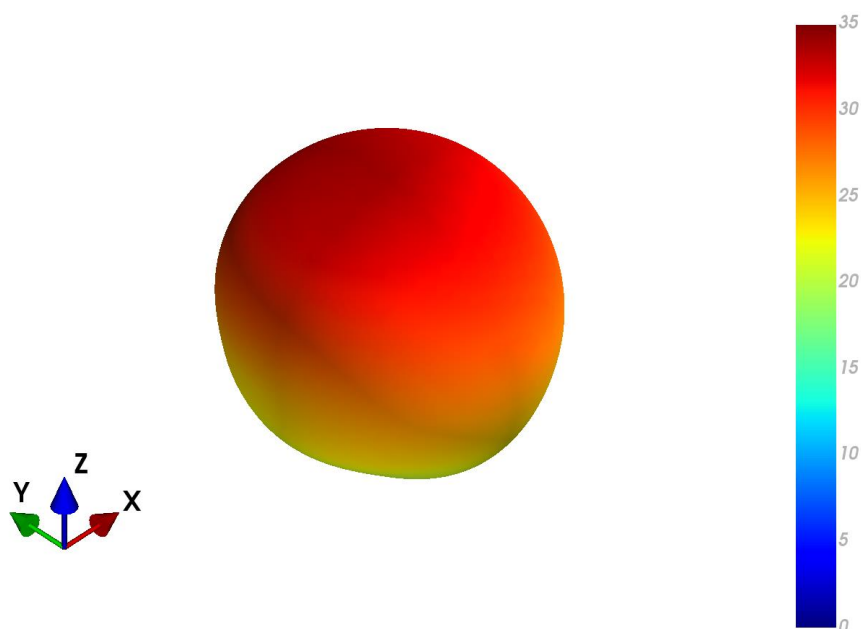



7.2 GNSS Free Space Patterns at 1227 MHz

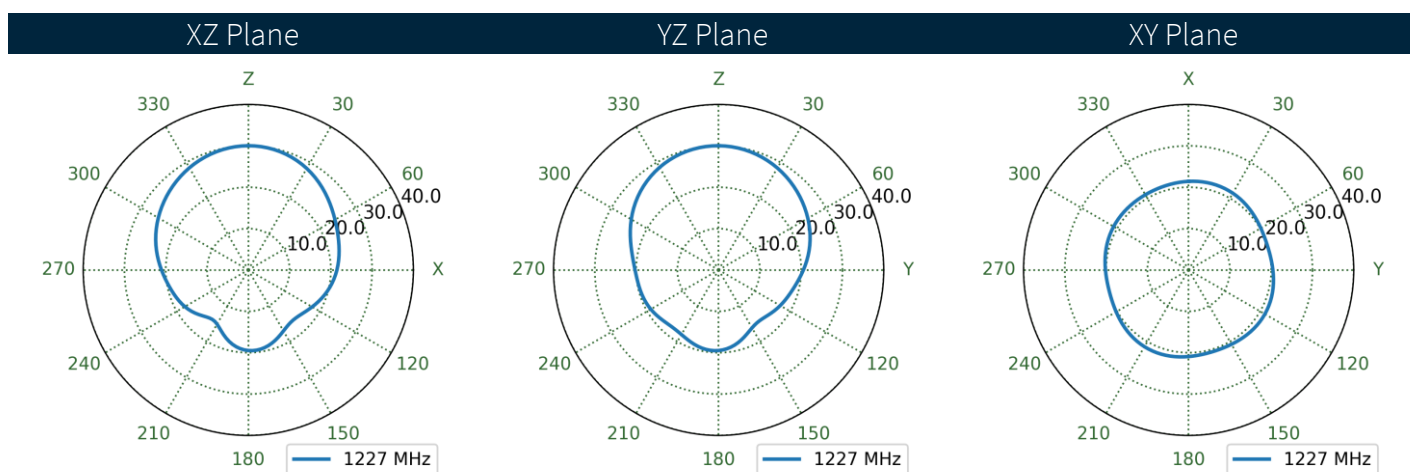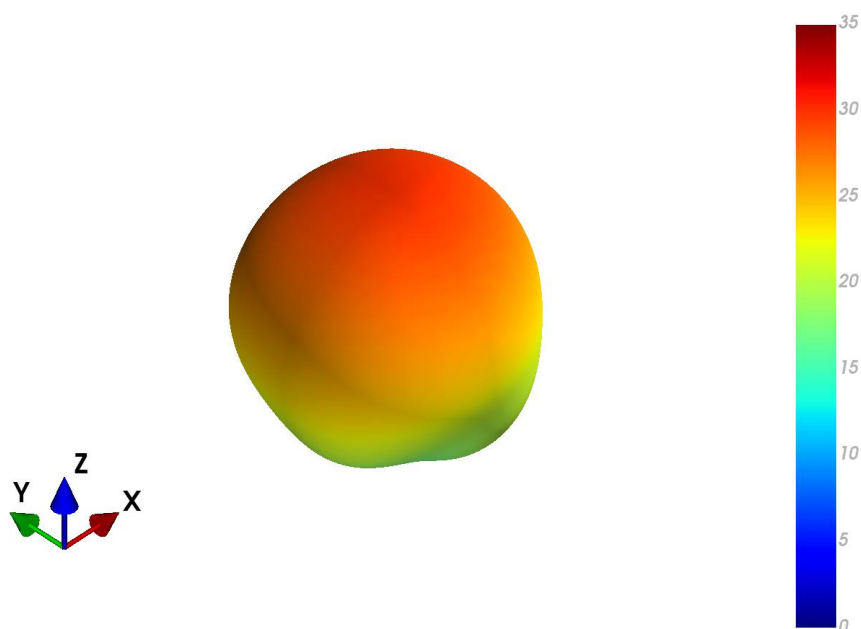



7.3 GNSS Free Space Patterns at 1176 MHz

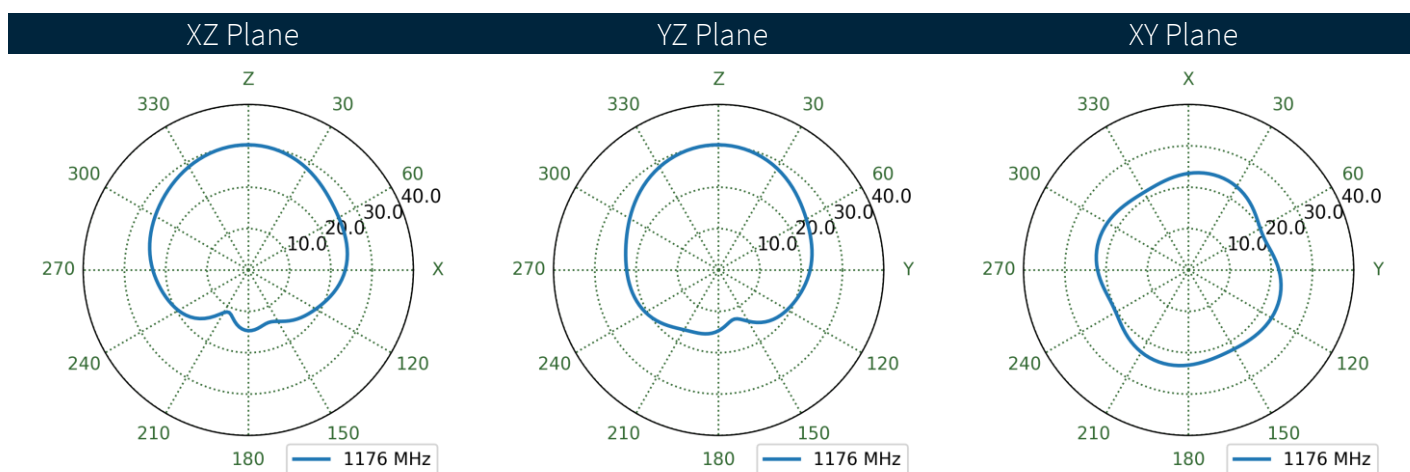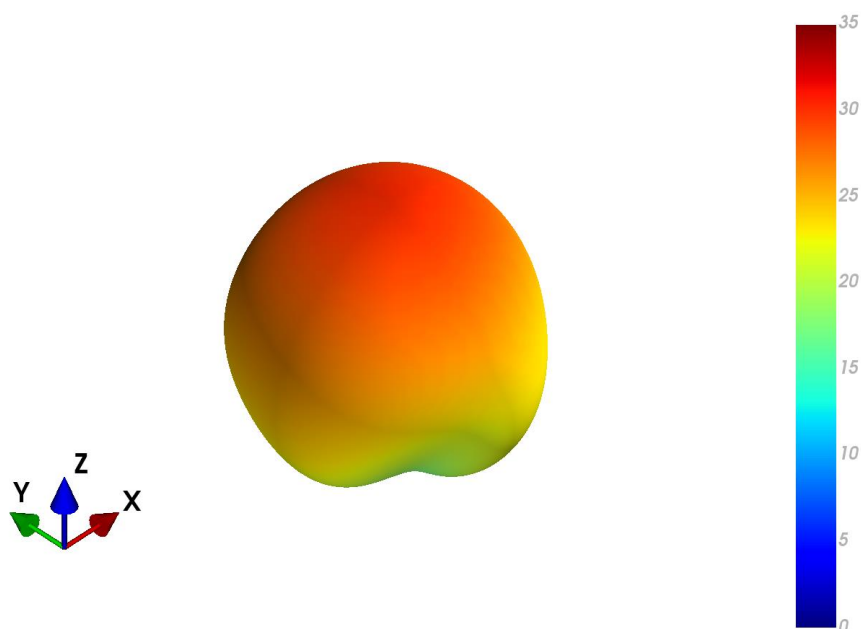



7.4 GNSS Free Space Patterns at 1603 MHz

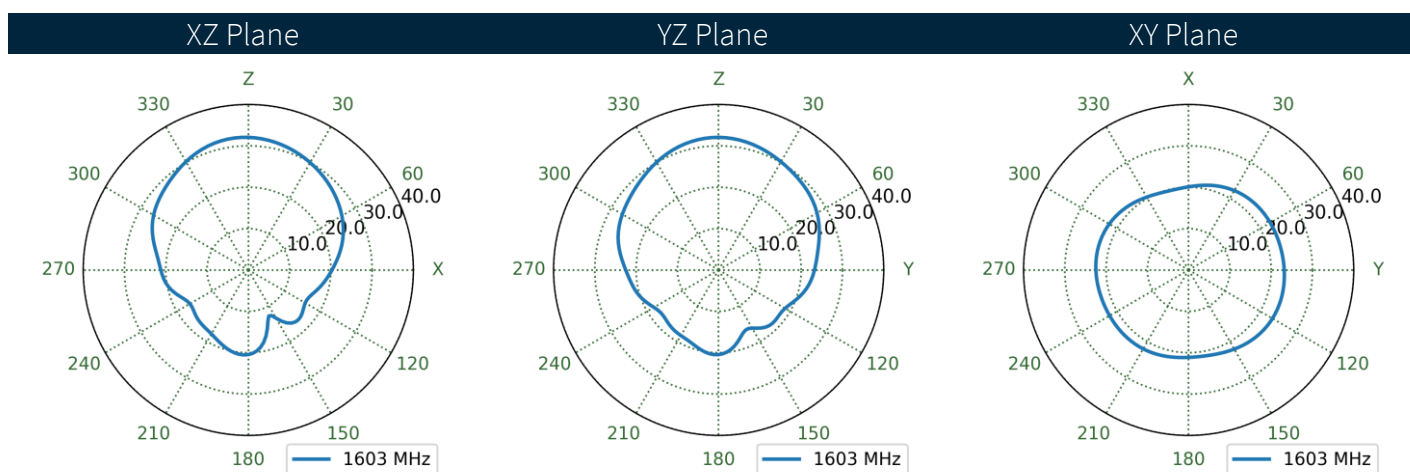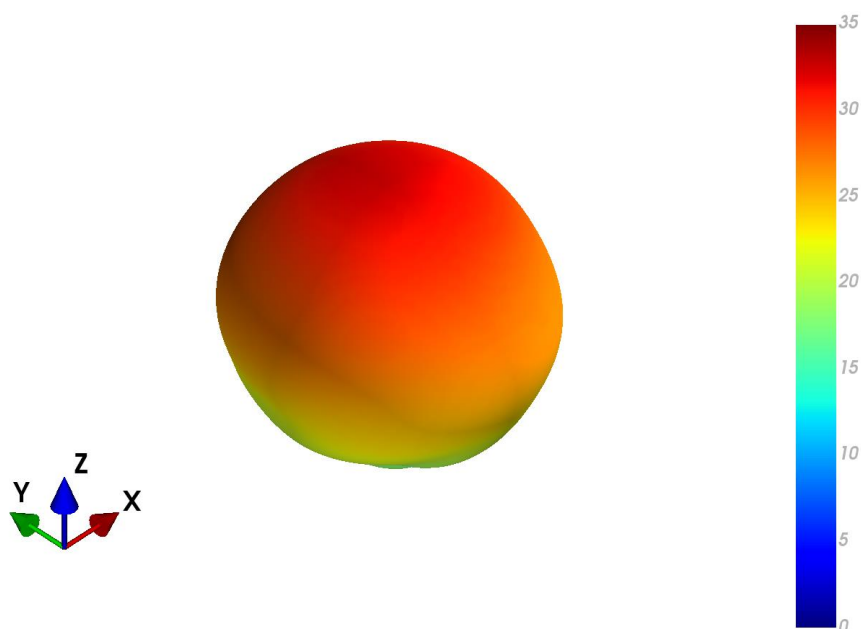



7.5 GNSS Free Space Patterns at 1248 MHz

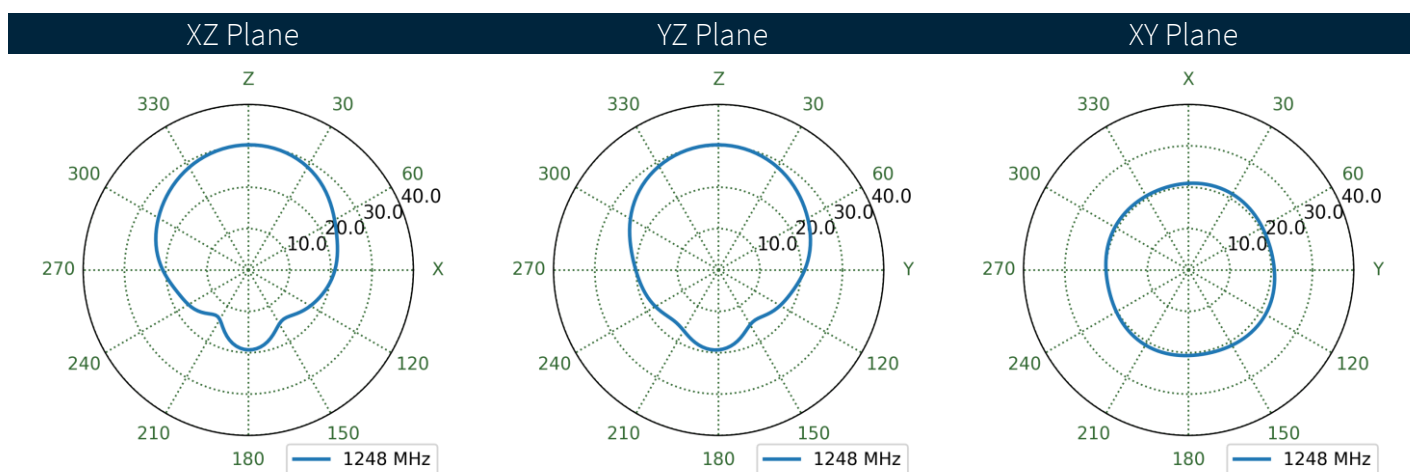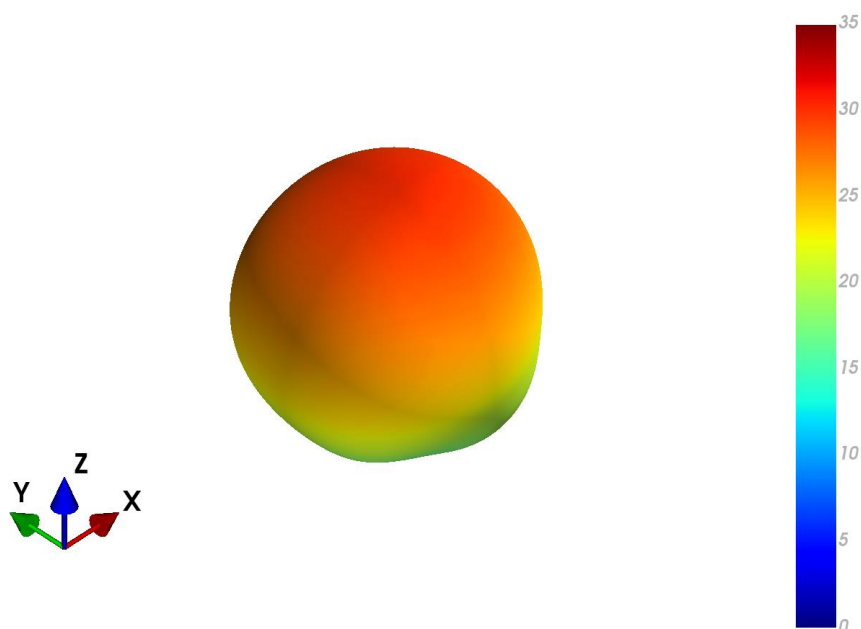



7.6 GNSS Free Space Patterns at 1200 MHz

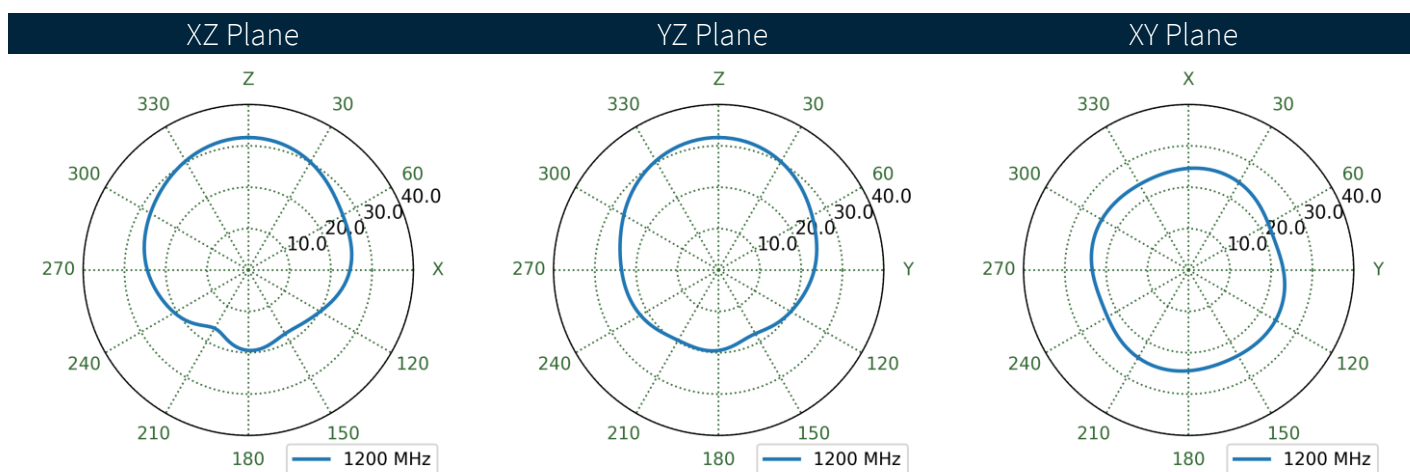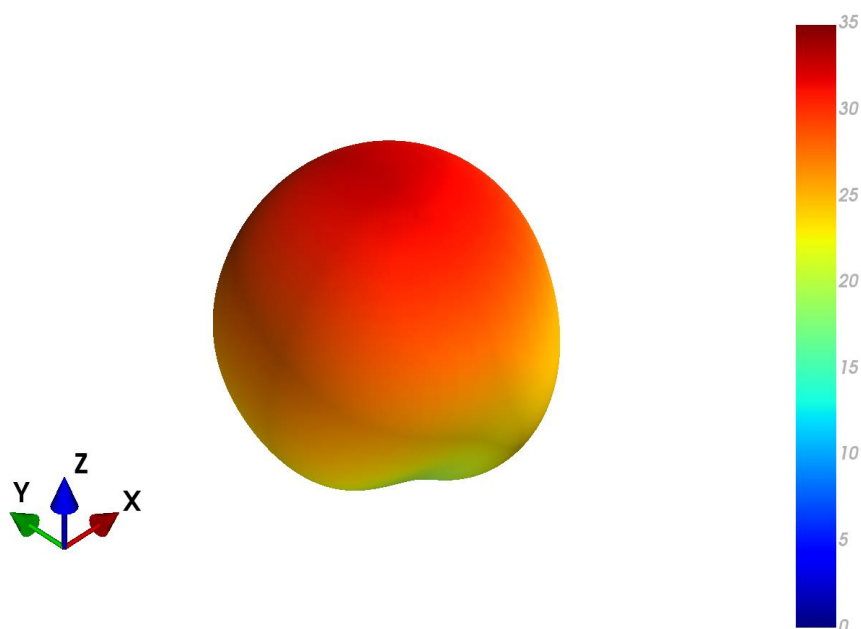



7.7 GNSS Free Space Patterns at 1575 MHz

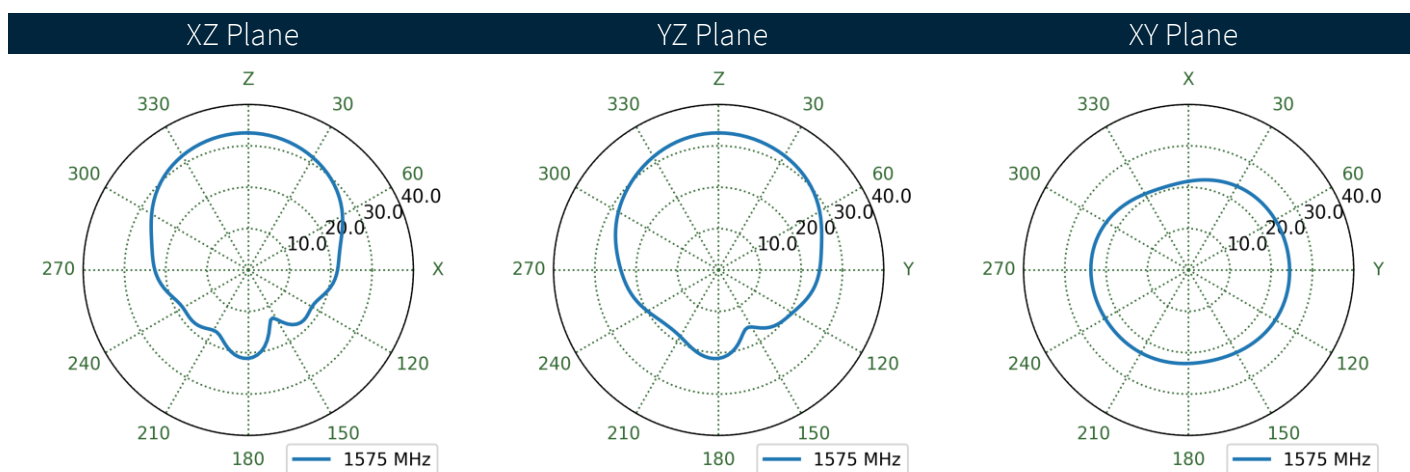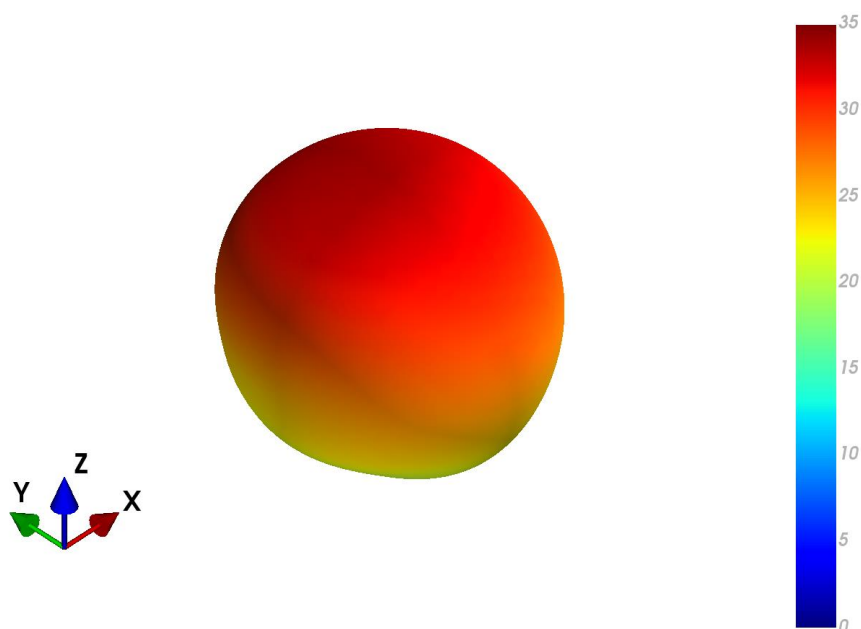


7.8 GNSS Free Space Patterns at 1176 MHz

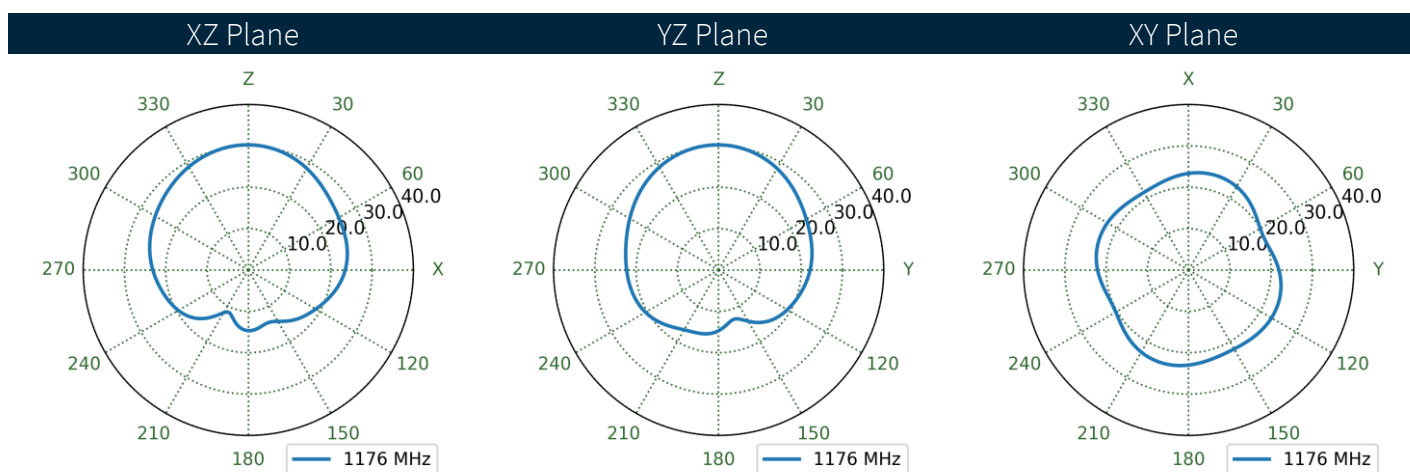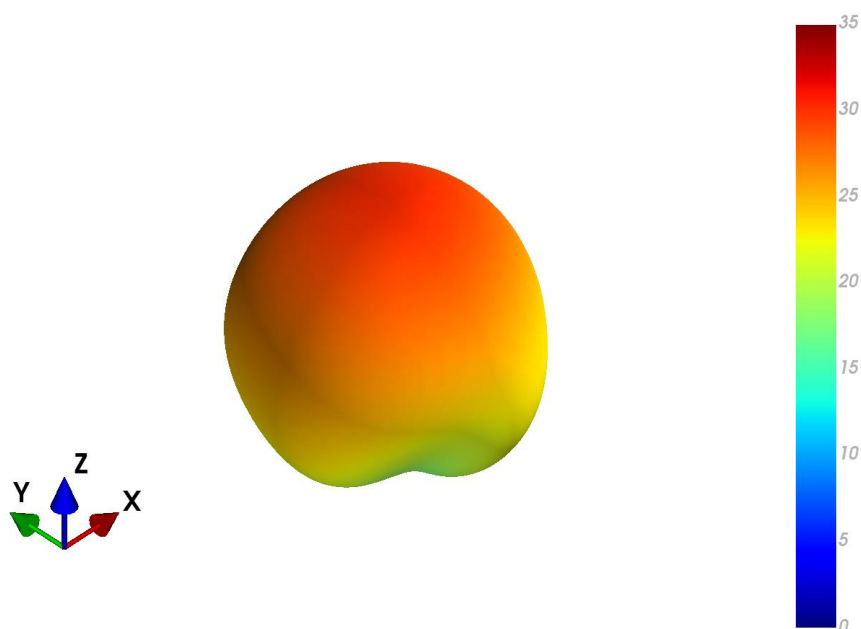


7.9 GNSS Free Space Patterns at 1201 MHz

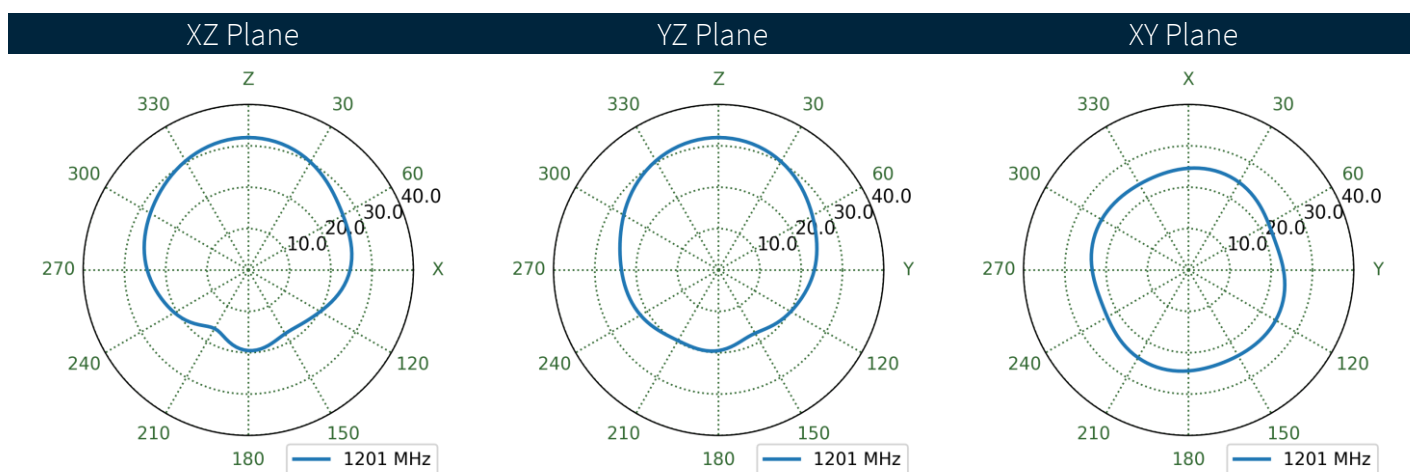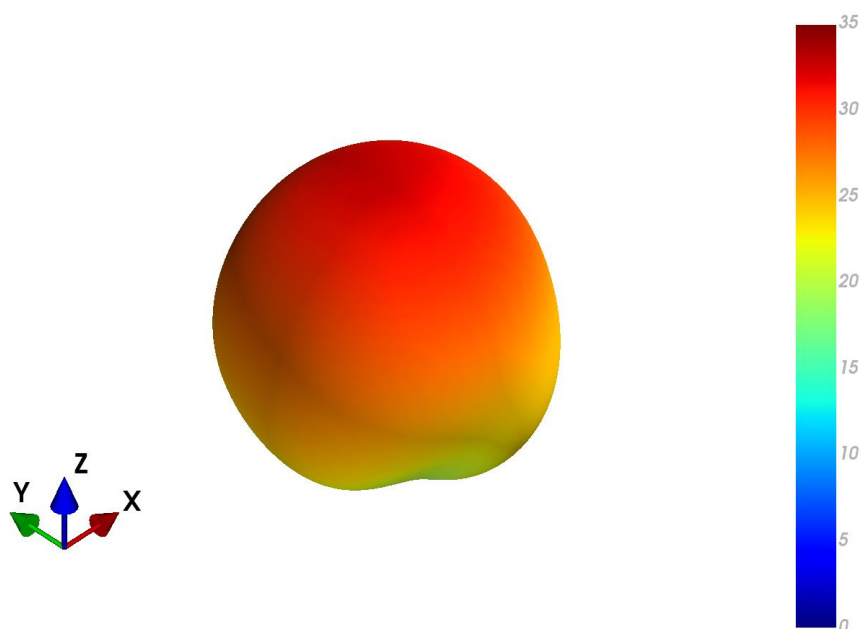


7.10 GNSS Free Space Patterns at 1575 MHz

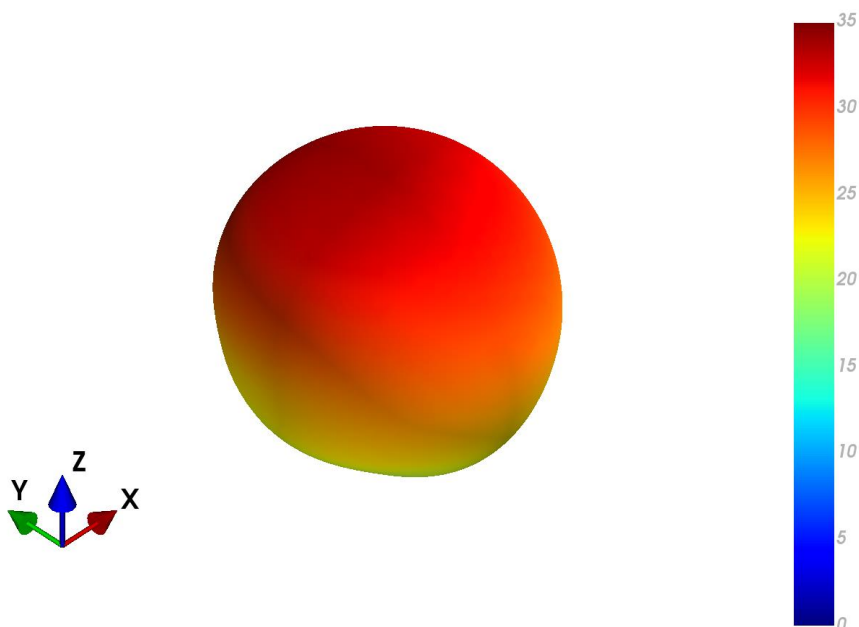


XZ Plane

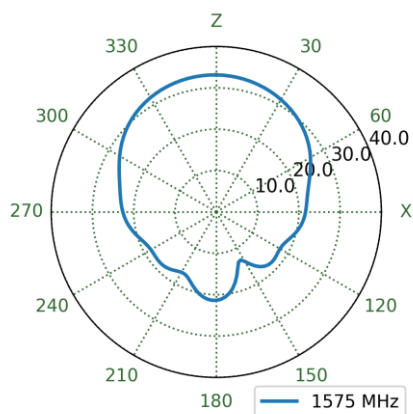


YZ Plane

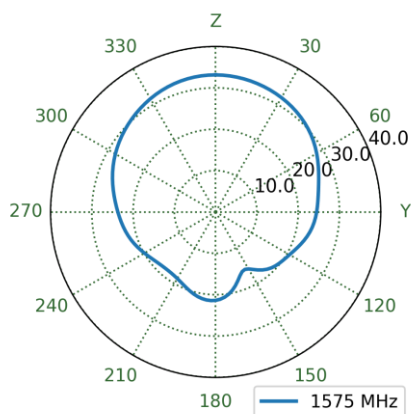


XY Plane

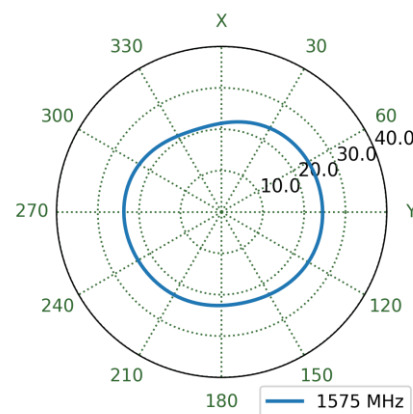


7.11 GNSS Free Space Patterns at 1562 MHz

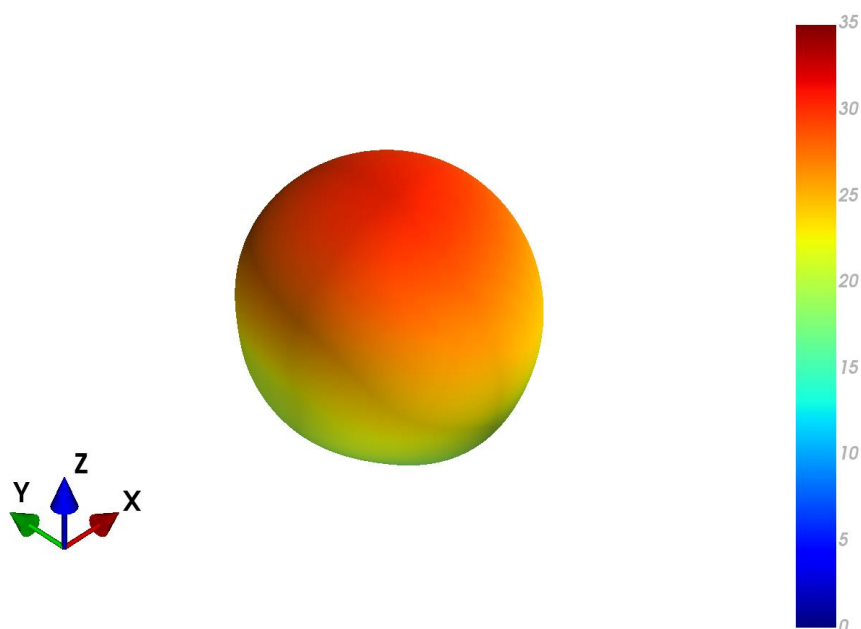


XZ Plane

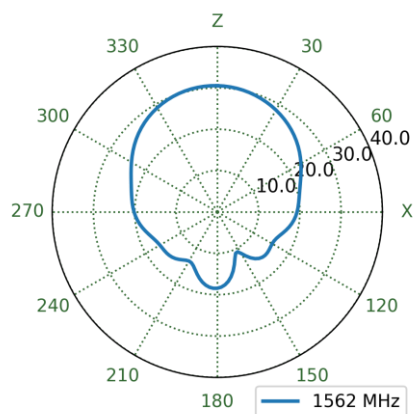



YZ Plane

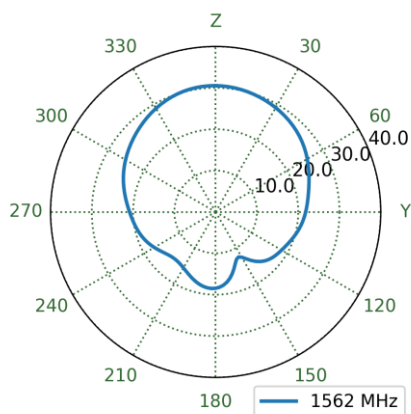



XY Plane

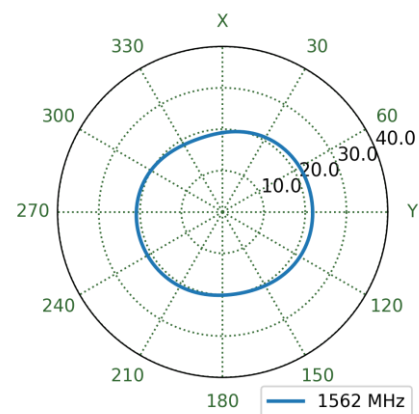


7.12 GNSS Free Space Patterns at 1176 MHz

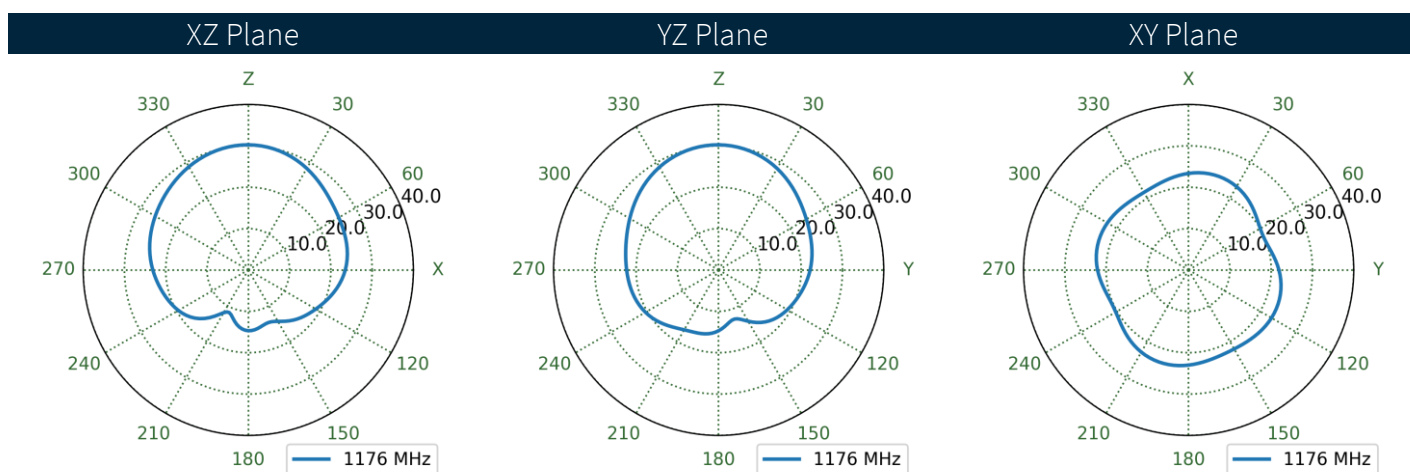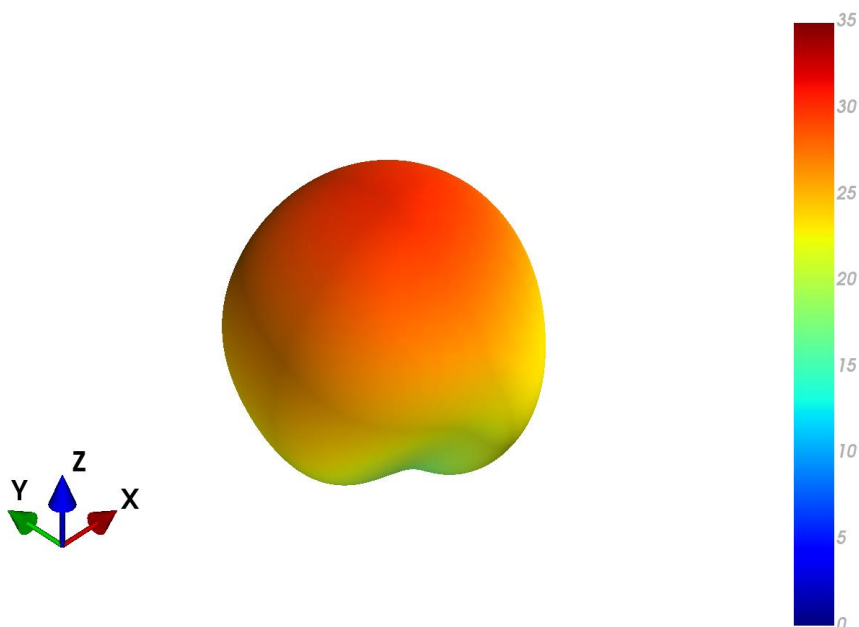


7.13 MIMO1 LTE Free Space Patterns at 660 MHz

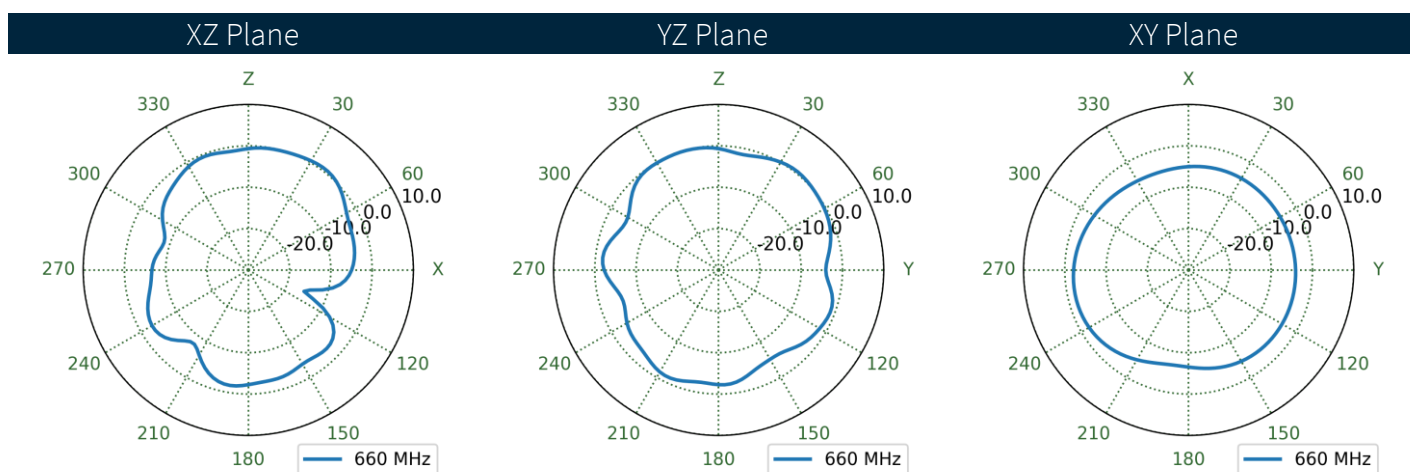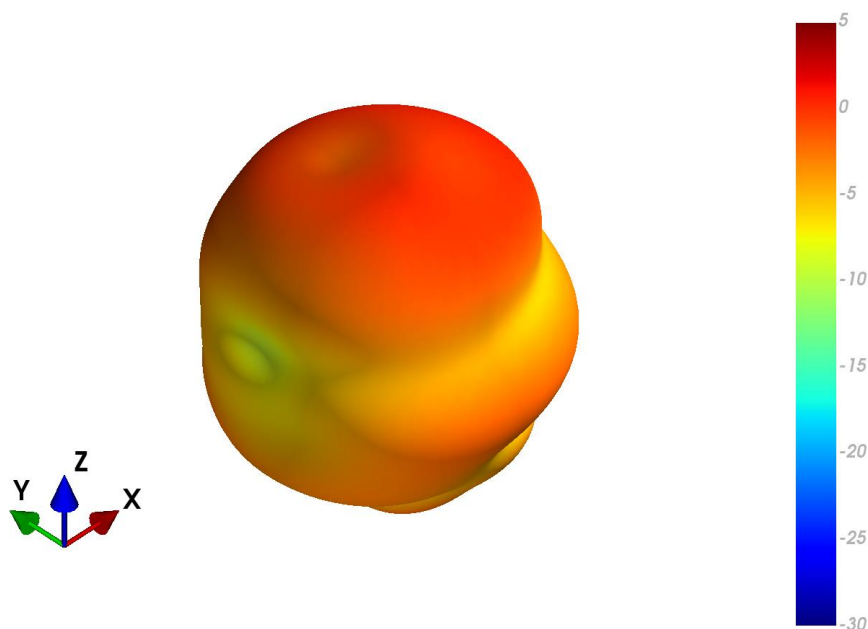


7.14 MIMO1 LTE Ground Plane Patterns at 660 MHz

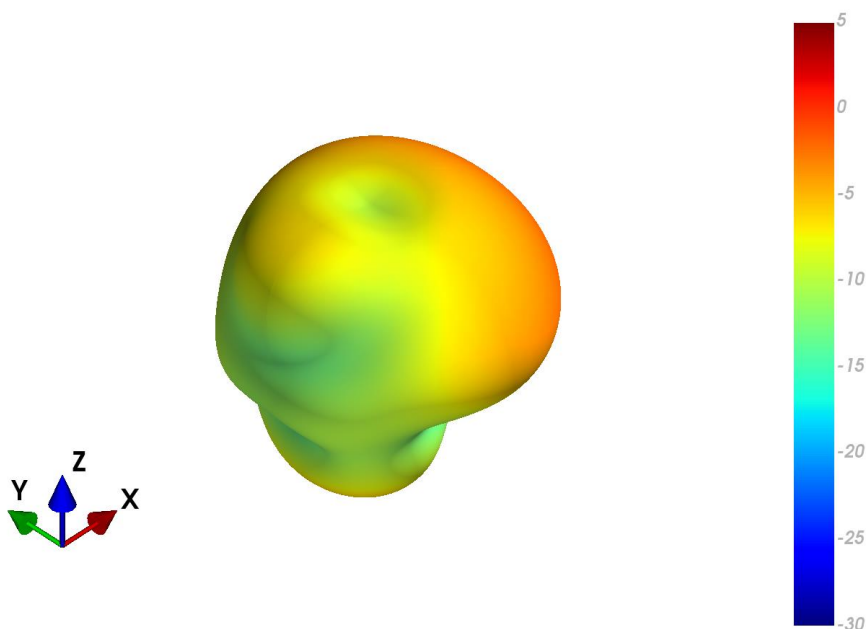


XZ Plane

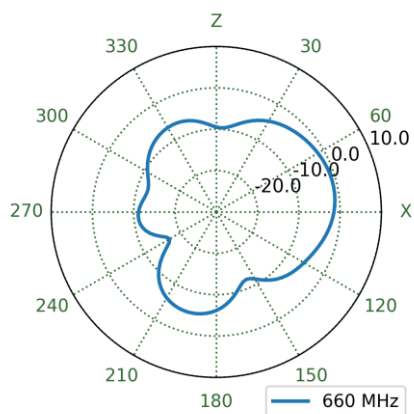


YZ Plane

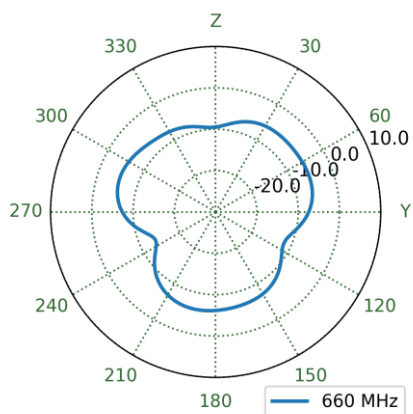


XY Plane

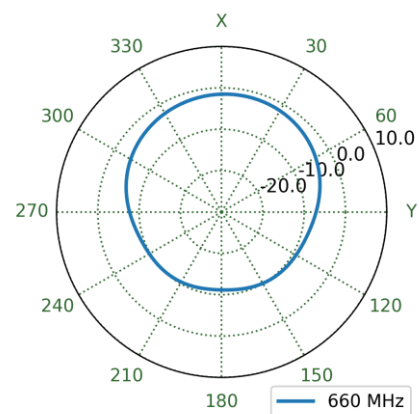


7.15 MIMO2 LTE Free Space Patterns at 660 MHz

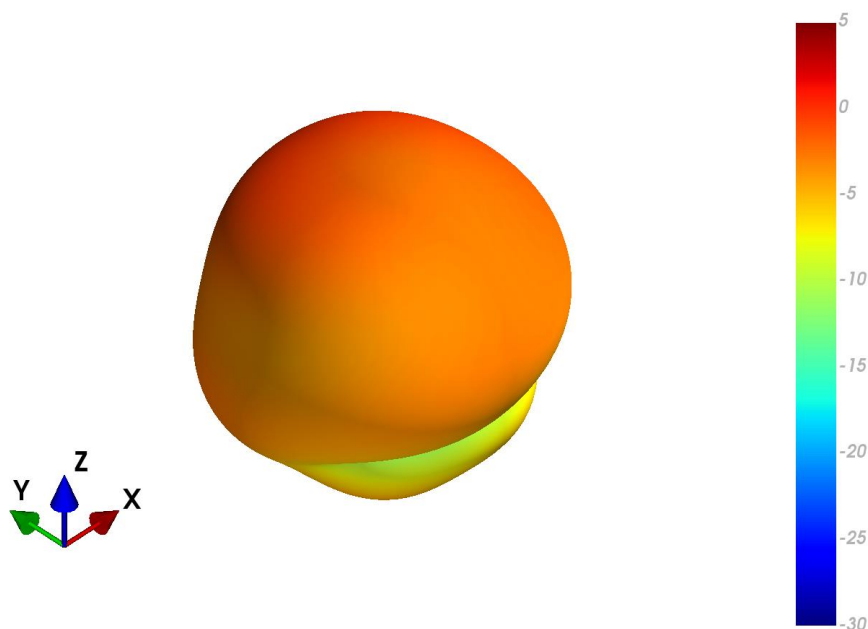


XZ Plane

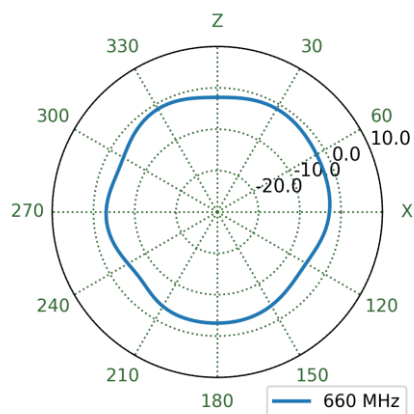


YZ Plane

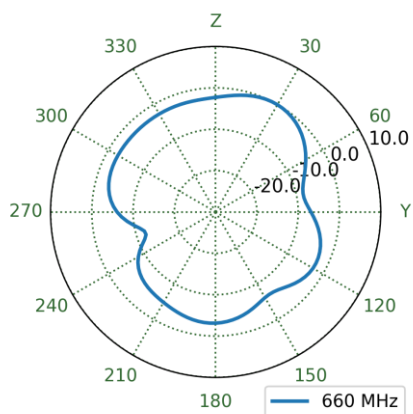


XY Plane

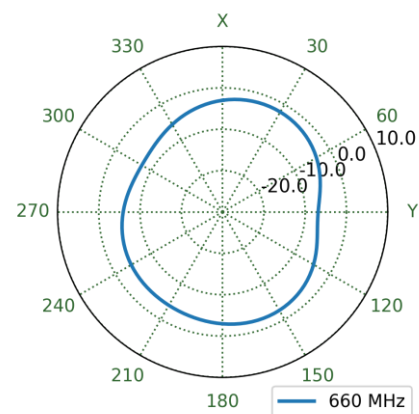


7.16 MIMO2 LTE Ground Plane Patterns at 660 MHz

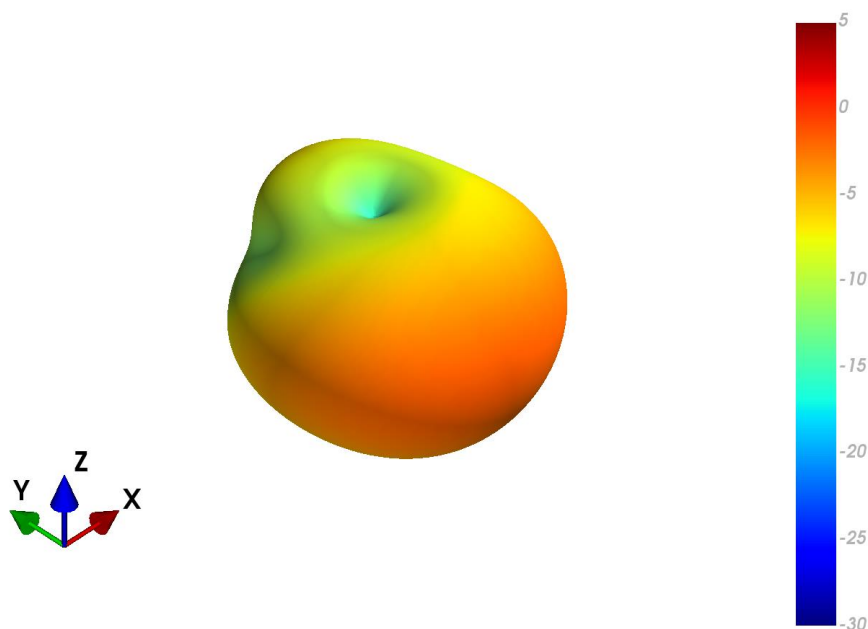


XZ Plane

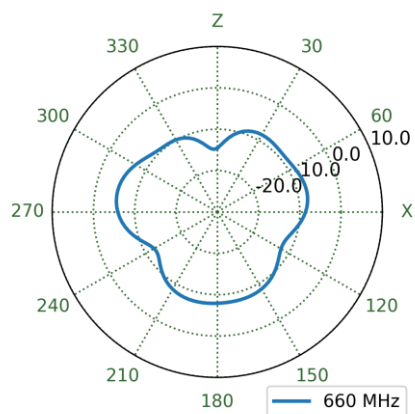


YZ Plane

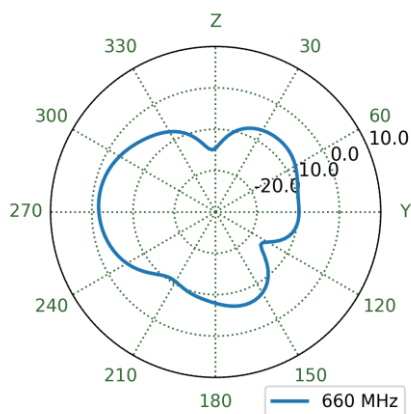


XY Plane

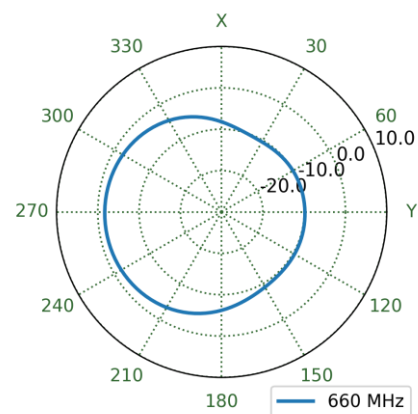


7.17 MIMO1 LTE Free Space Patterns at 750 MHz

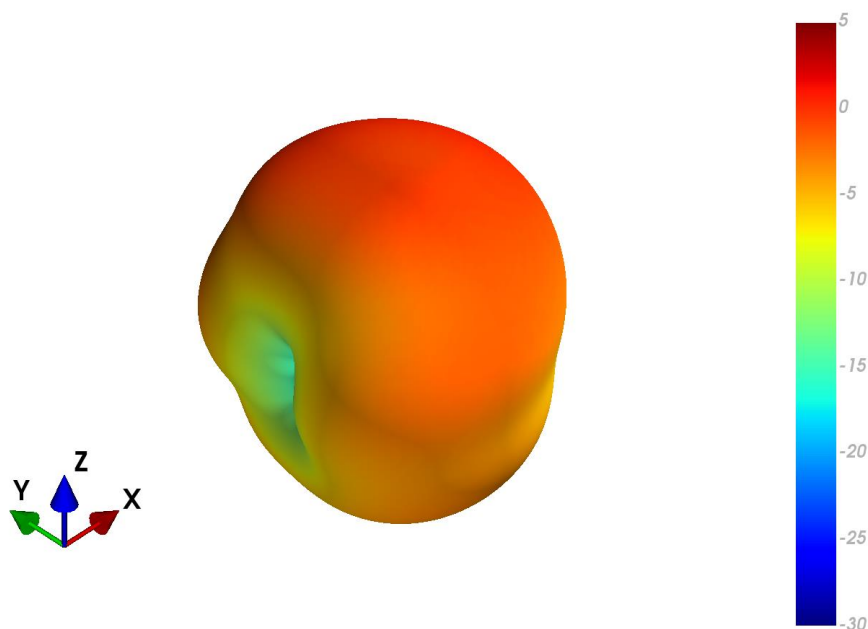


XZ Plane

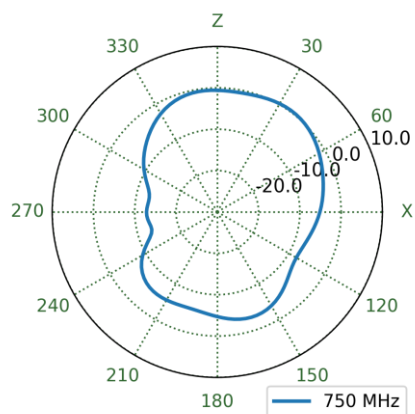


YZ Plane

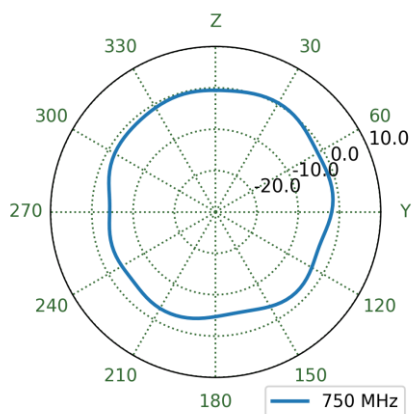


XY Plane

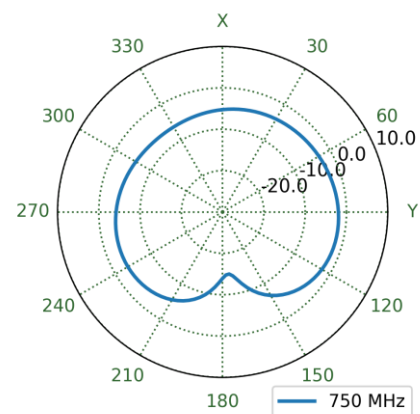


7.18 MIMO1 LTE Ground Plane Patterns at 750 MHz

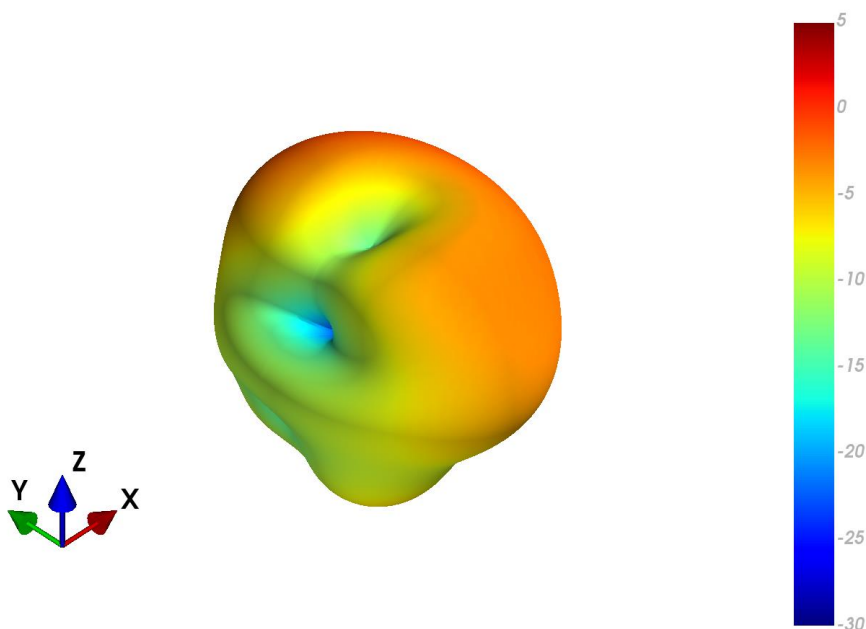


XZ Plane

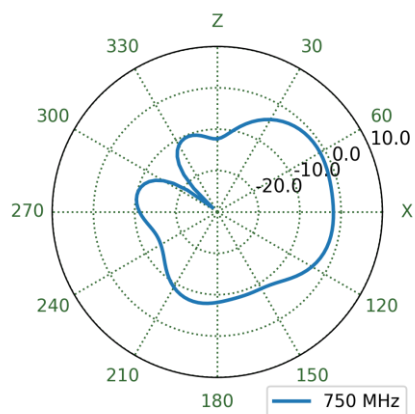


YZ Plane

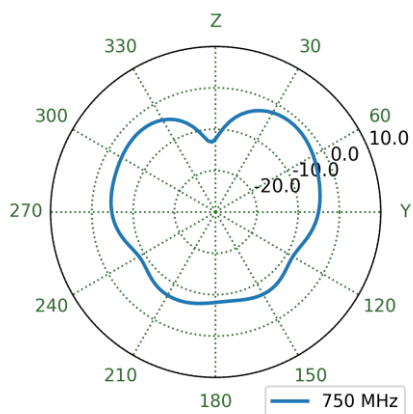


XY Plane

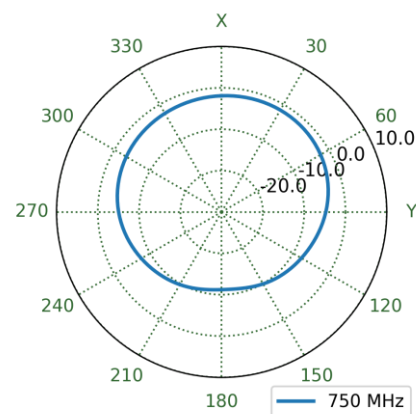


7.19 MIMO2 LTE Free Space Patterns at 750 MHz

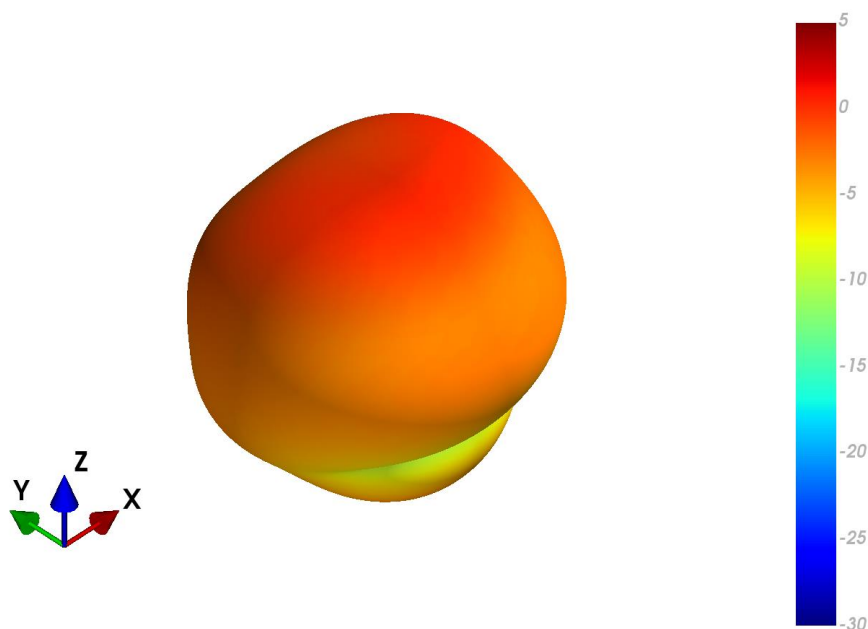


XZ Plane

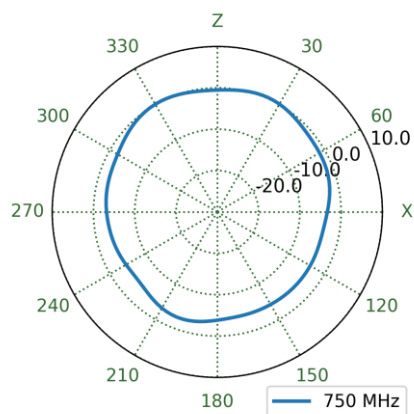


YZ Plane

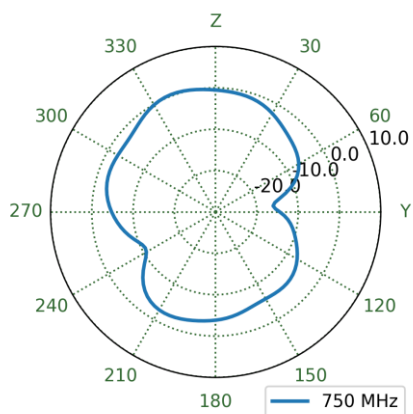


XY Plane

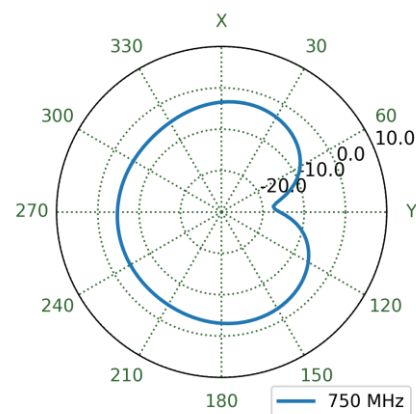


7.20 MIMO2 LTE Ground Plane Patterns at 750 MHz

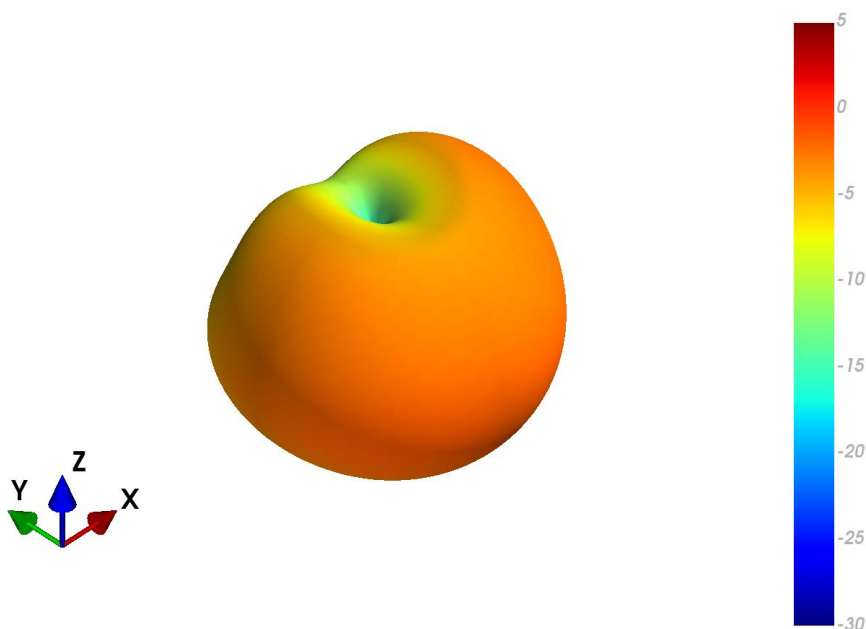


XZ Plane

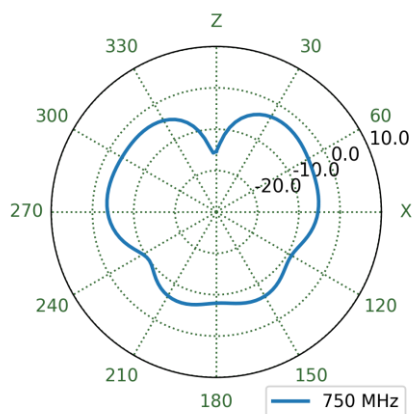


YZ Plane

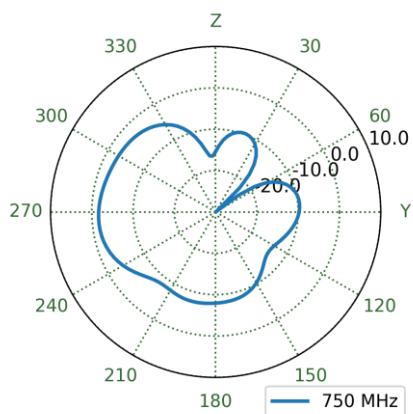


XY Plane

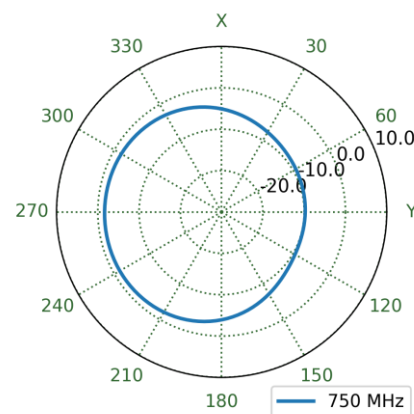


7.21 MIMO1 LTE Free Space Patterns at 890 MHz

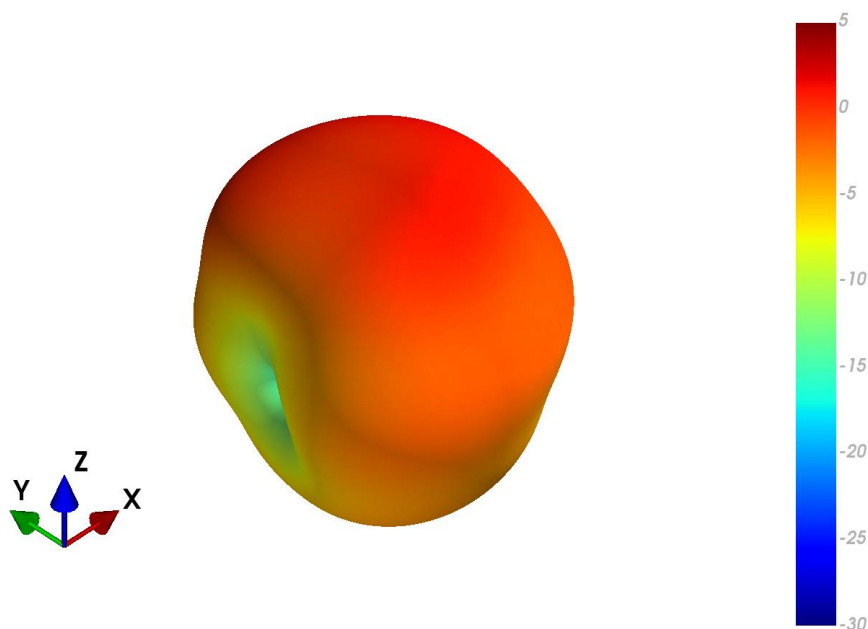


XZ Plane

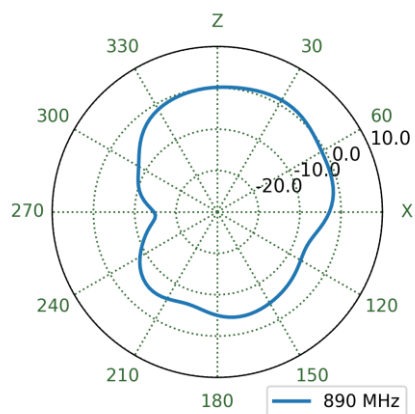


YZ Plane

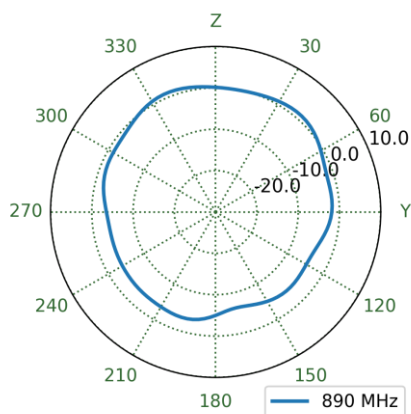


XY Plane

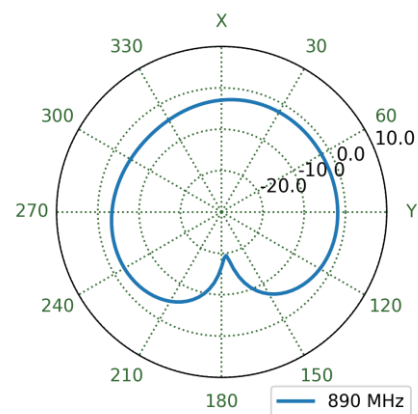


7.22 MIMO1 LTE Ground Plane Patterns at 890 MHz

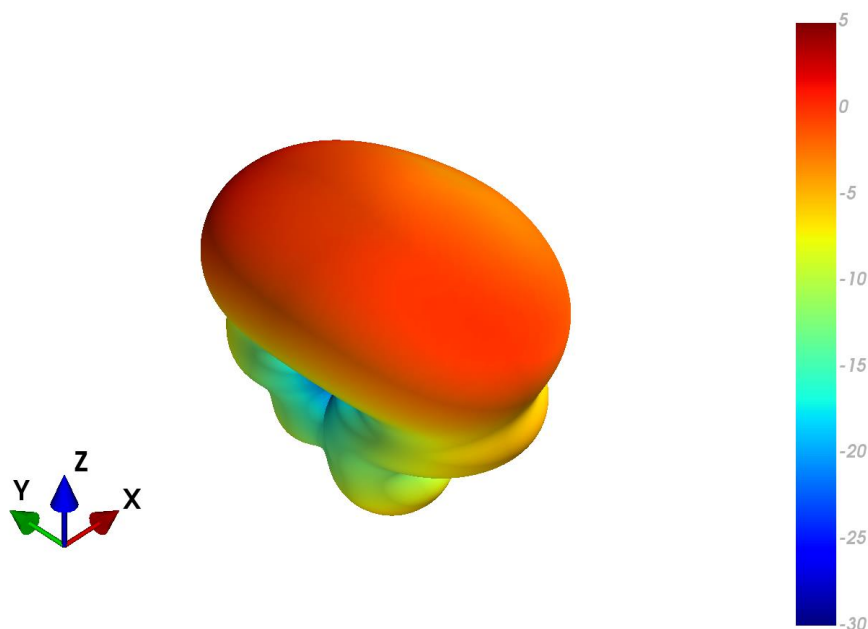


XZ Plane

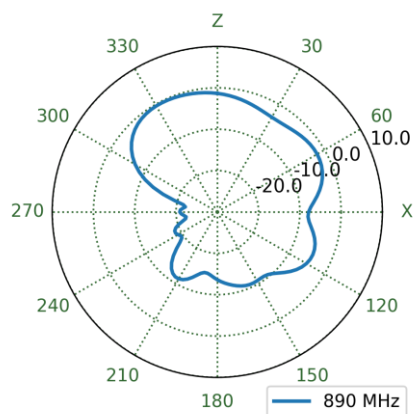


YZ Plane

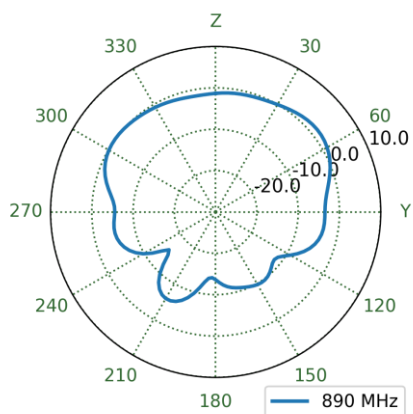


XY Plane

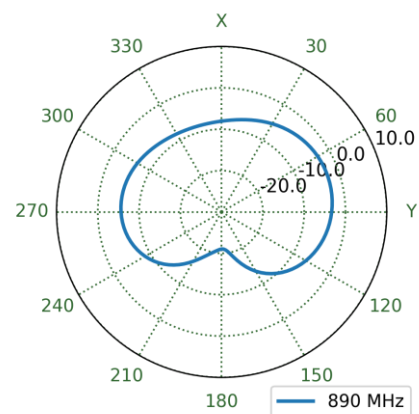


7.23 MIMO2 LTE Free Space Patterns at 890 MHz

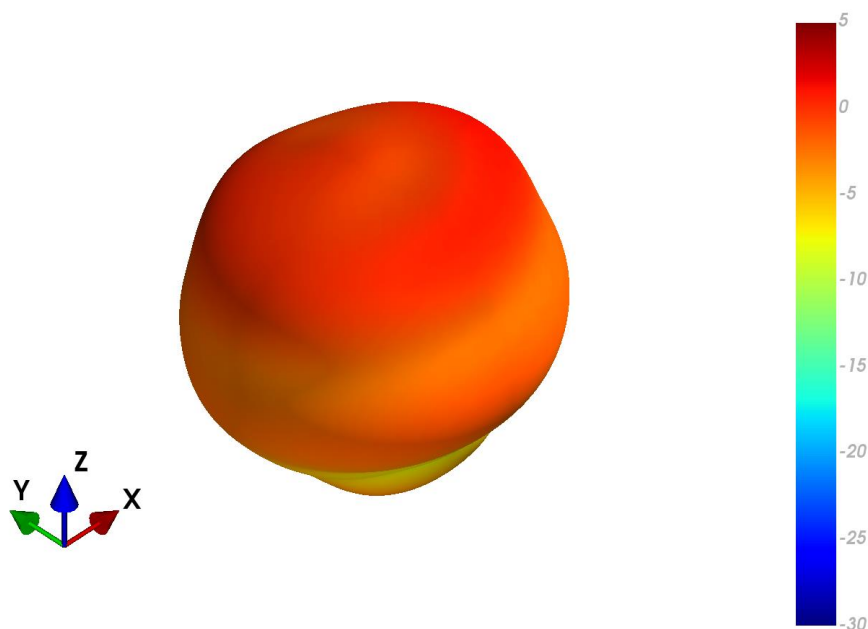


XZ Plane

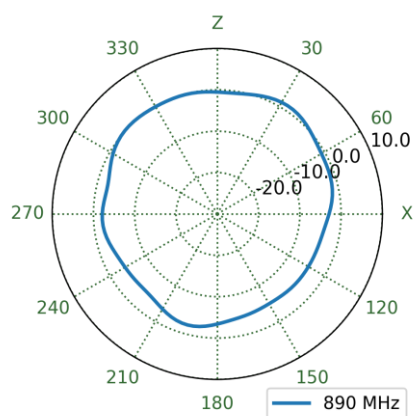


YZ Plane

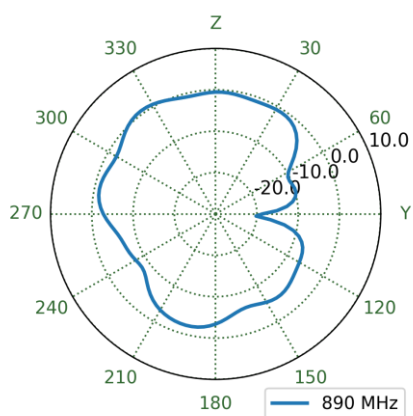


XY Plane

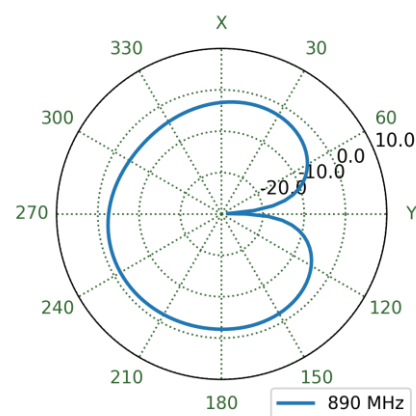


7.24 MIMO2 LTE Ground Plane Patterns at 890 MHz

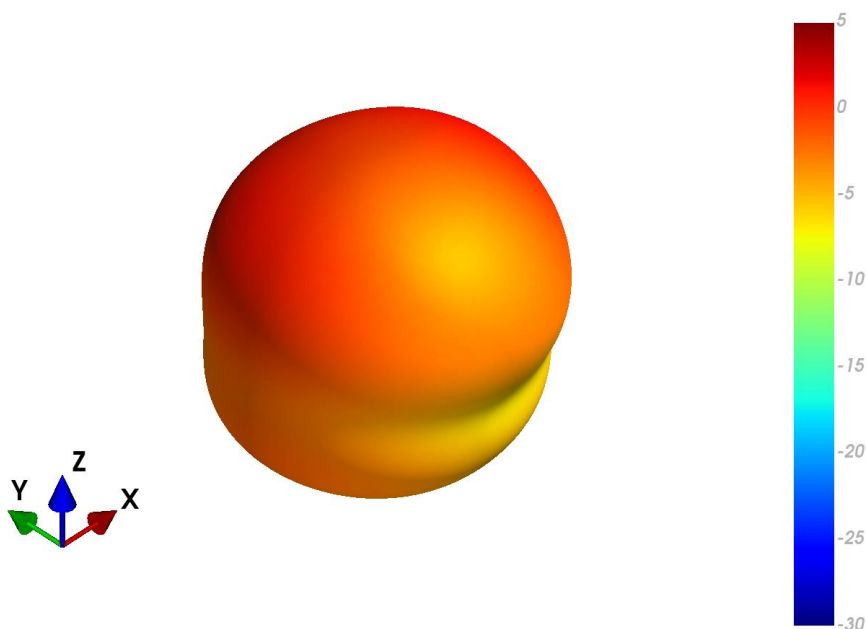


XZ Plane

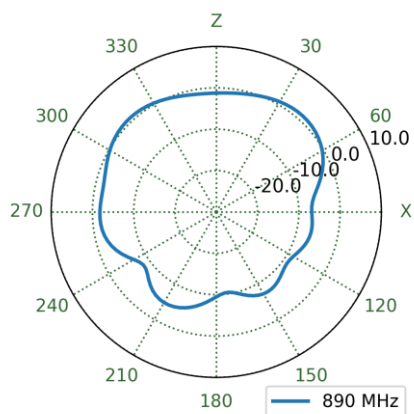


YZ Plane

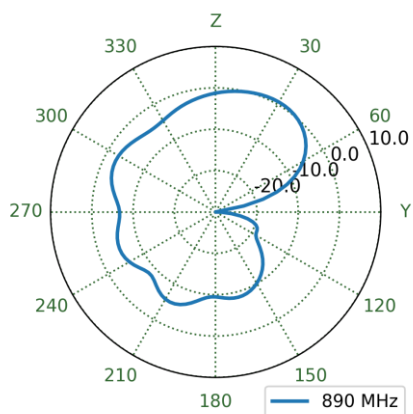


XY Plane

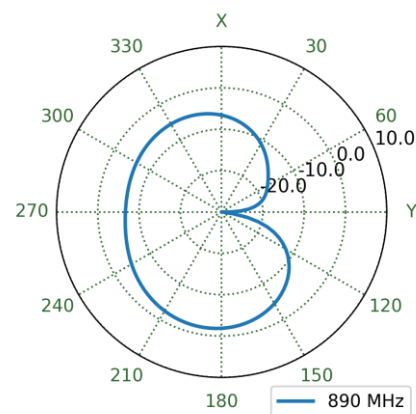


7.25 MIMO1 LTE Free Space Patterns at 1470 MHz

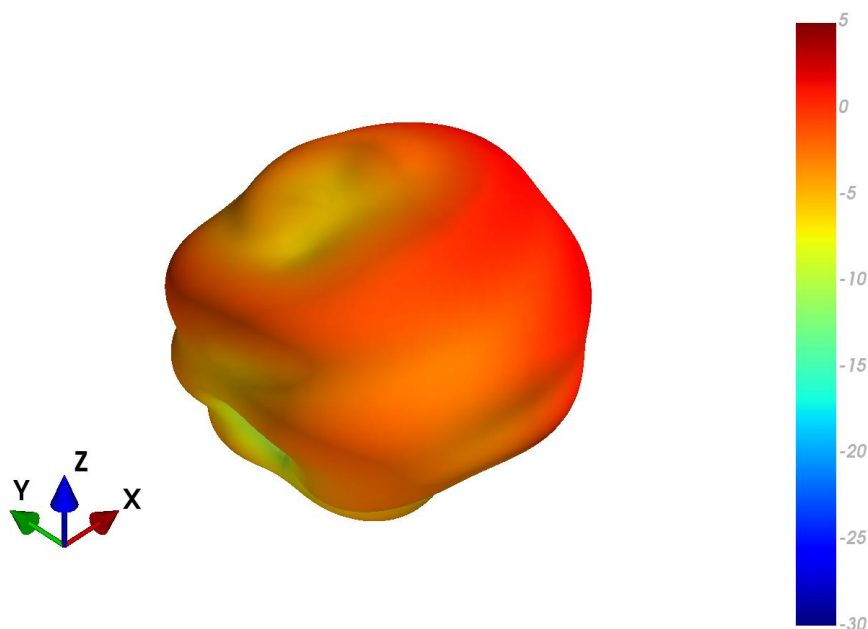


XZ Plane

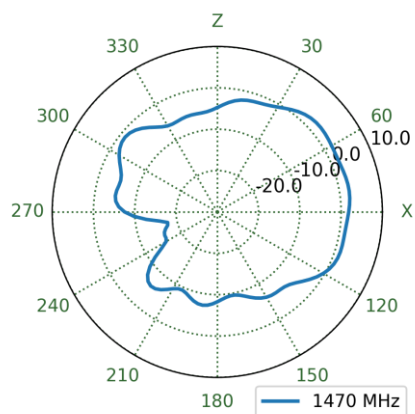


YZ Plane

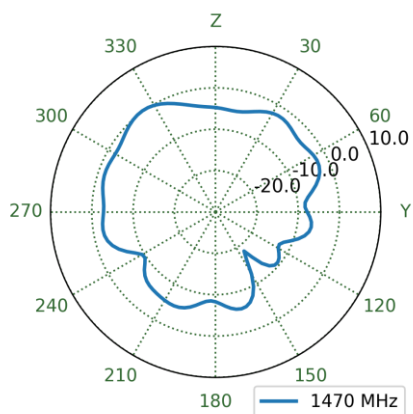


XY Plane

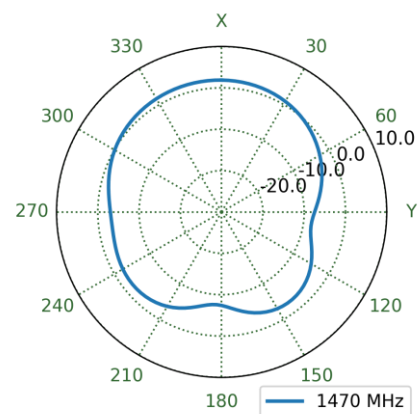


7.26 MIMO1 LTE Ground Plane Patterns at 1470 MHz

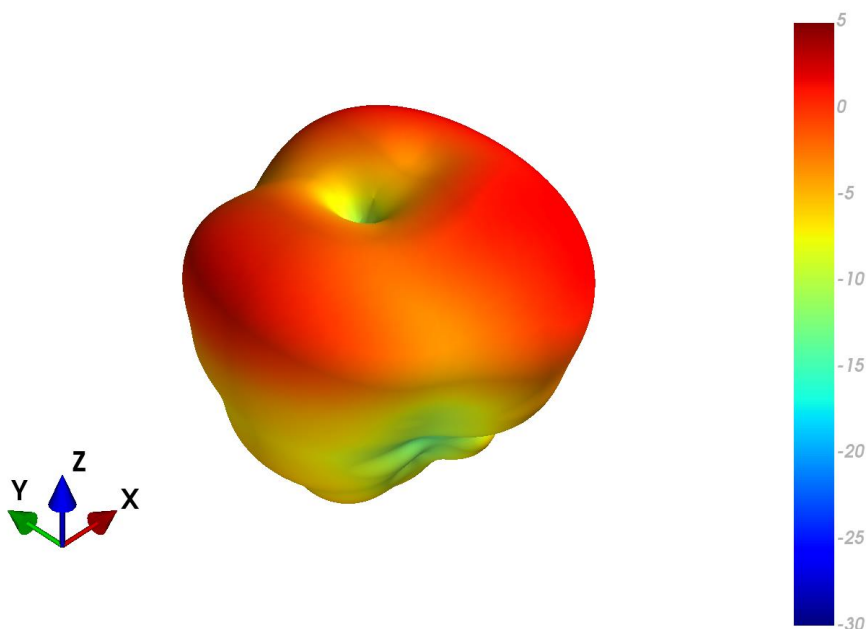


XZ Plane

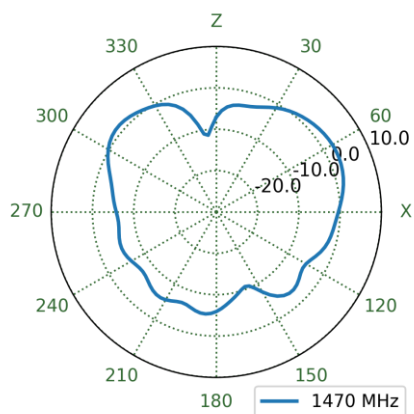


YZ Plane

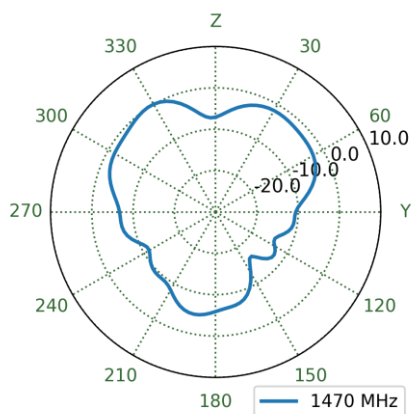


XY Plane

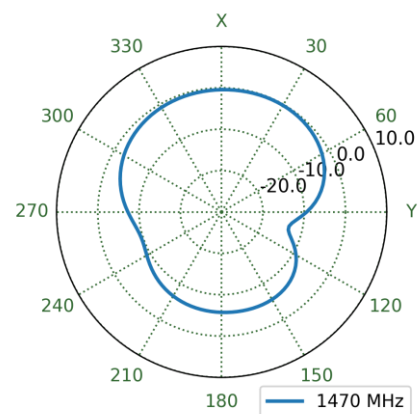


7.27 MIMO2 LTE Free Space Patterns at 1470 MHz

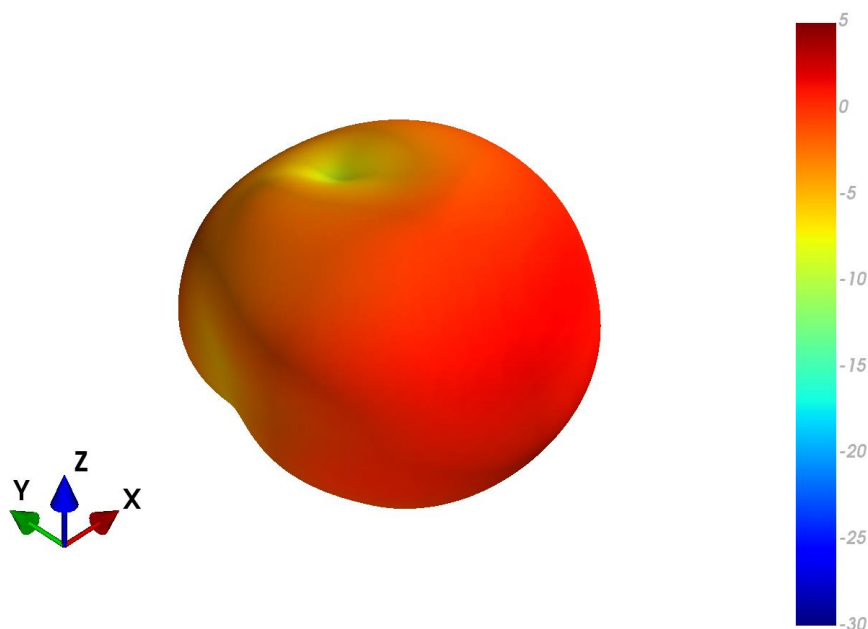


XZ Plane

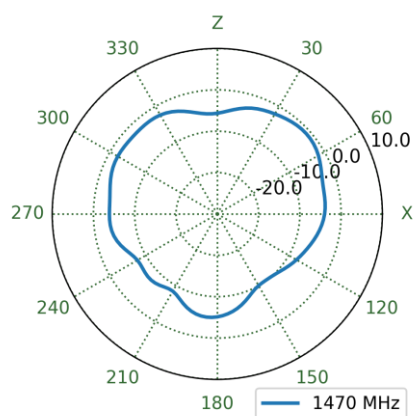


YZ Plane

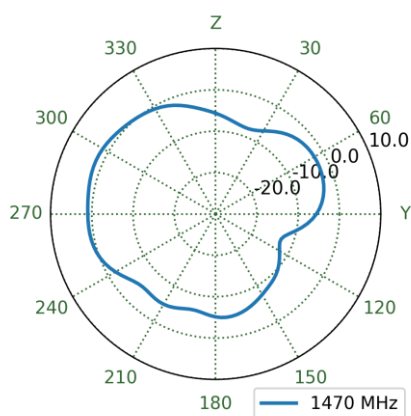


XY Plane

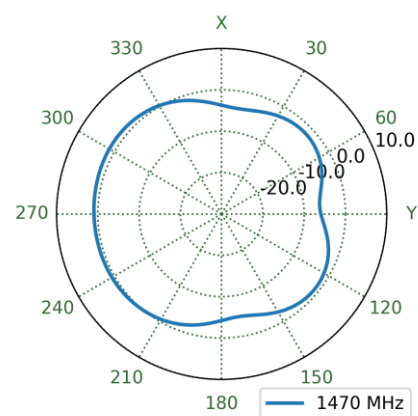


7.28 MIMO2 LTE Ground Plane Patterns at 1470 MHz

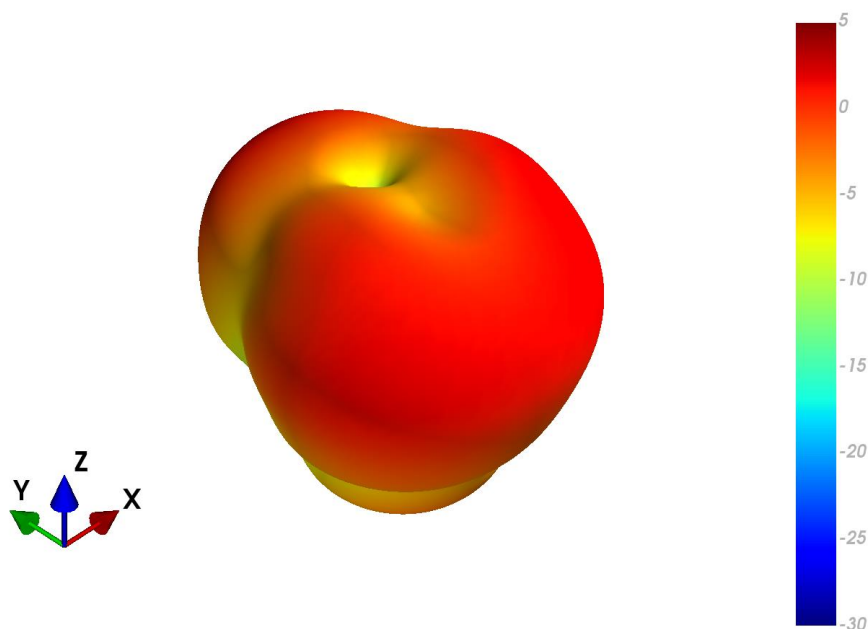


XZ Plane

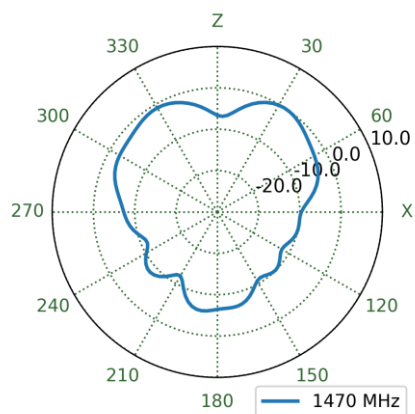


YZ Plane

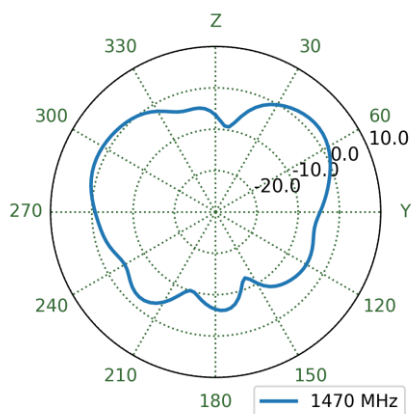


XY Plane

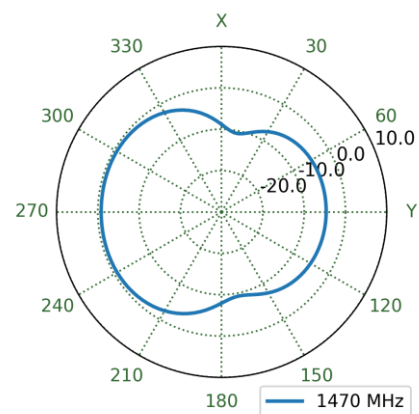


7.29 MIMO1 LTE Free Space Patterns at 1950 MHz

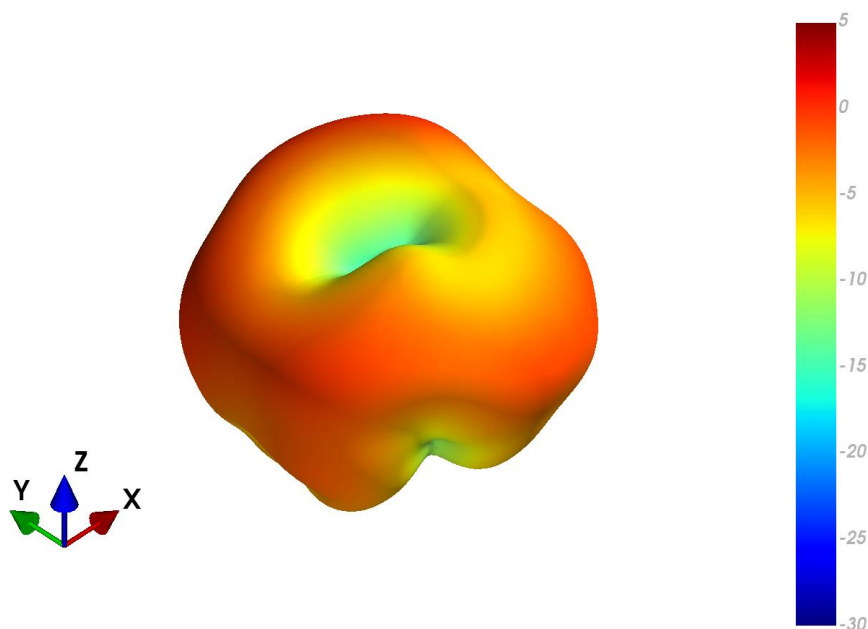


XZ Plane

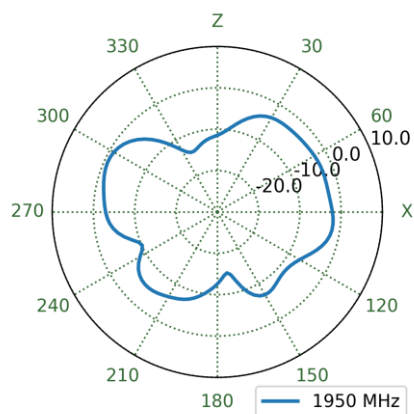


YZ Plane

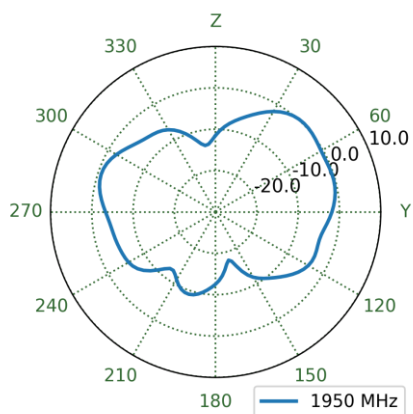


XY Plane

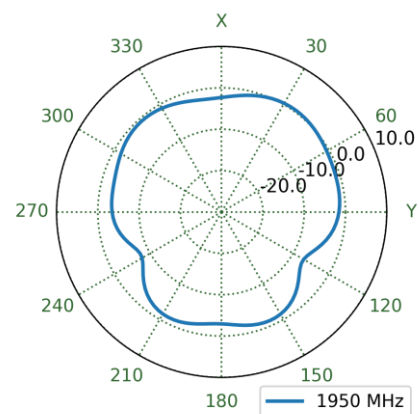


7.30 MIMO1 LTE Ground Plane Patterns at 1950 MHz

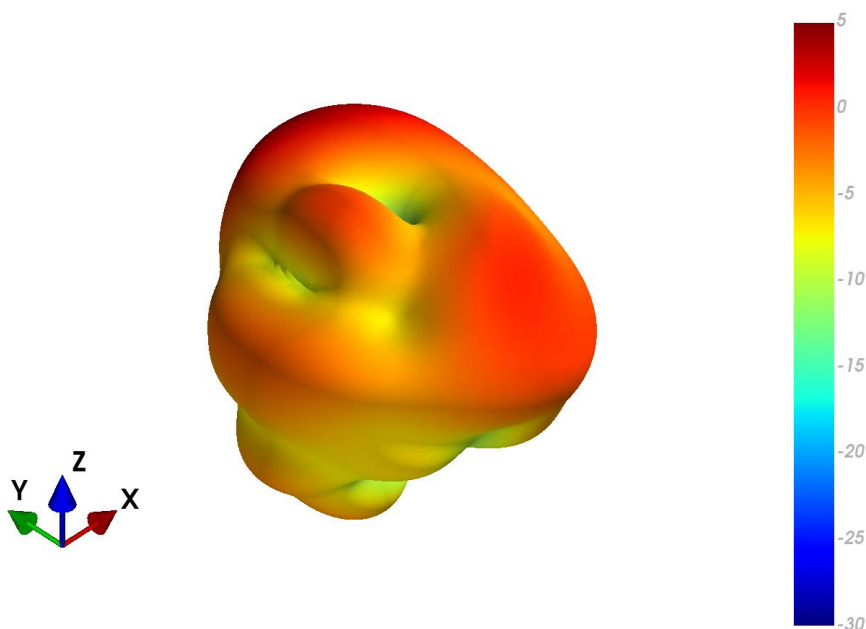


XZ Plane

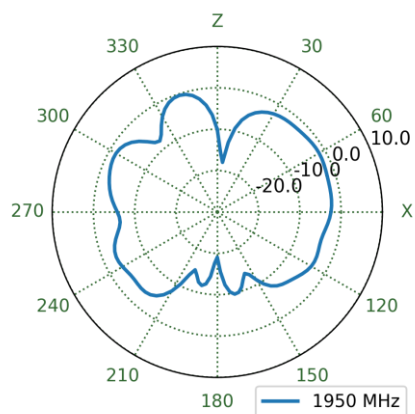


YZ Plane

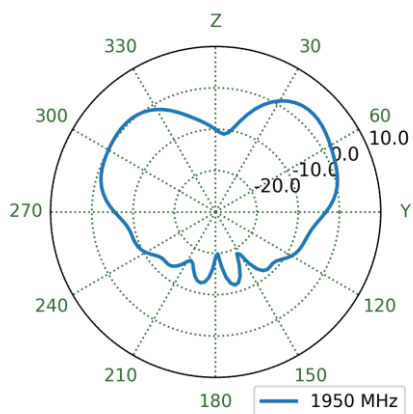


XY Plane

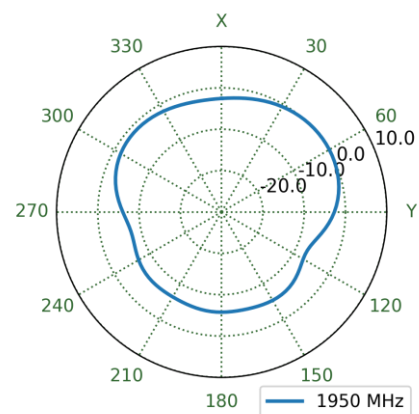


7.31 MIMO2 LTE Free Space Patterns at 1950 MHz

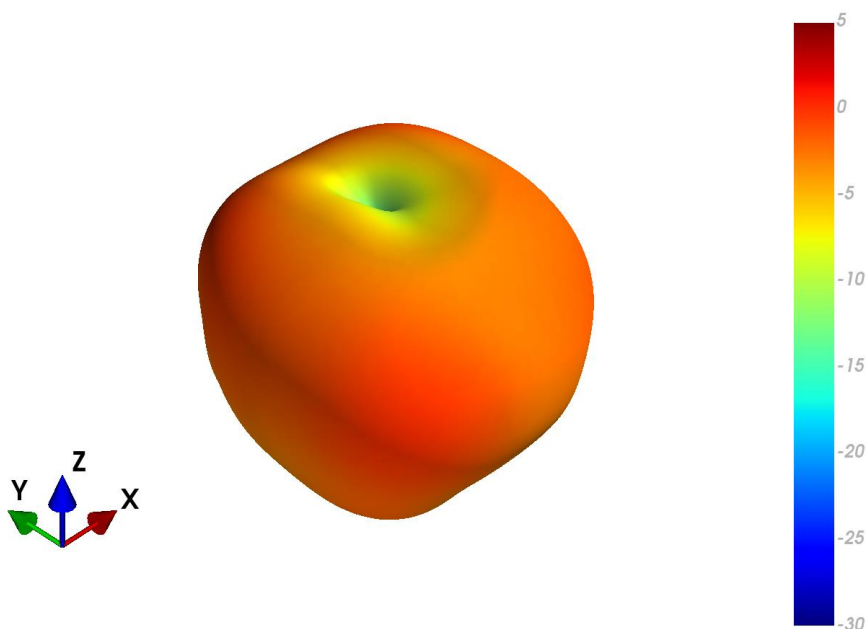


XZ Plane

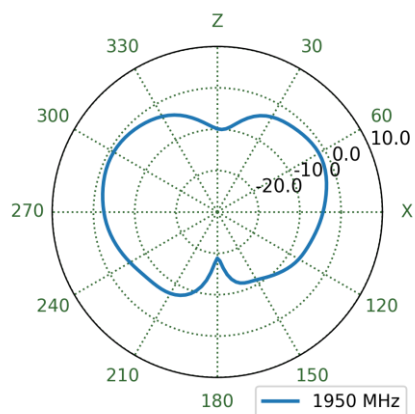


YZ Plane

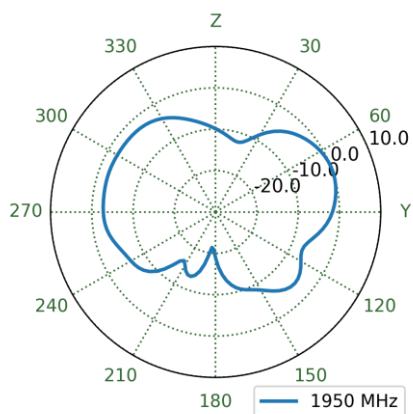


XY Plane

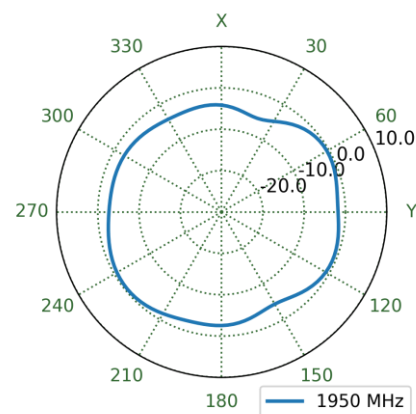


7.32 MIMO2 LTE Ground Plane Patterns at 1950 MHz

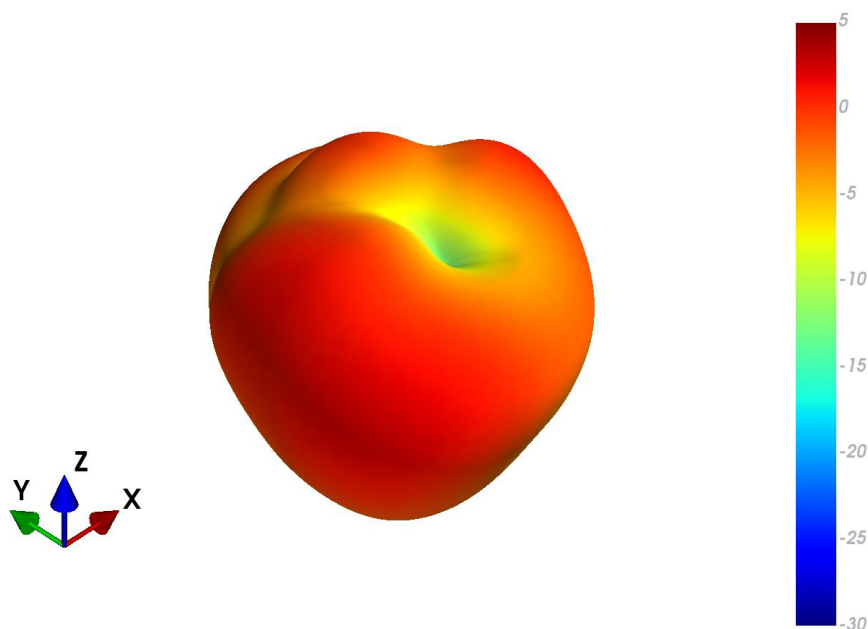


XZ Plane

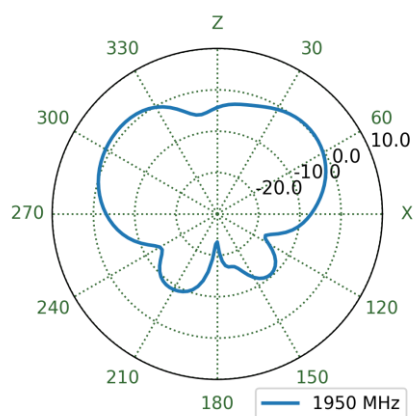


YZ Plane

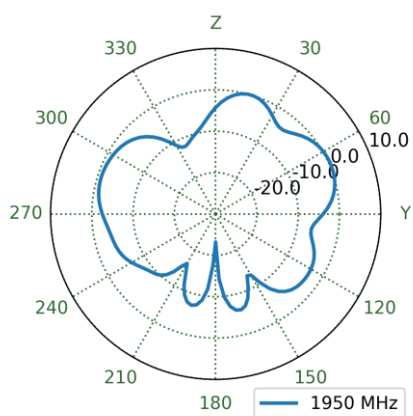


XY Plane

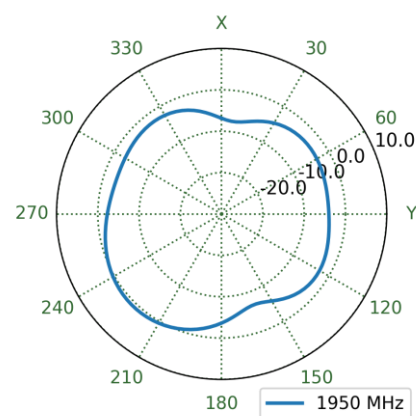


7.33 MIMO1 LTE Free Space Patterns at 2490 MHz

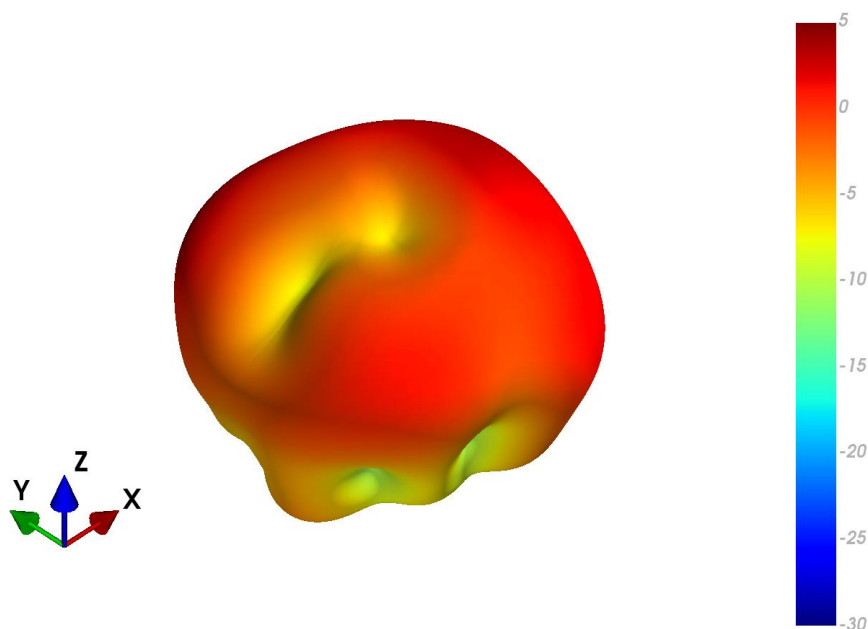


XZ Plane

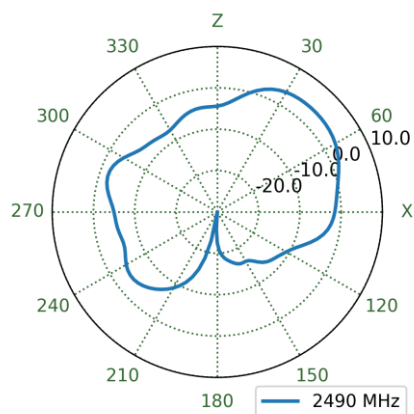


YZ Plane

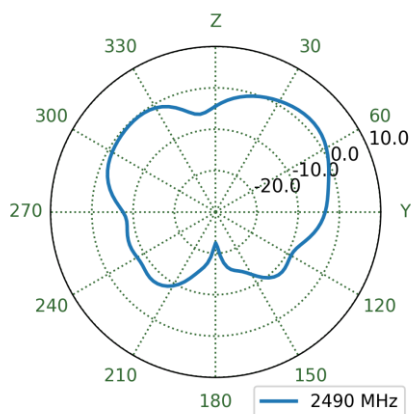


XY Plane

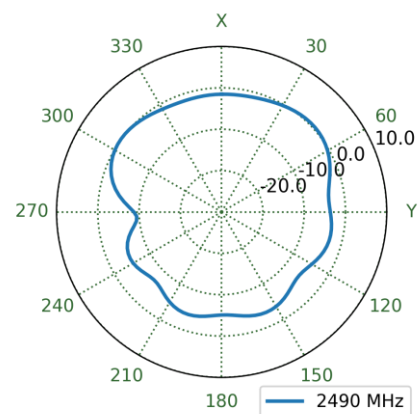


7.34 MIMO1 LTE Ground Plane Patterns at 2490 MHz

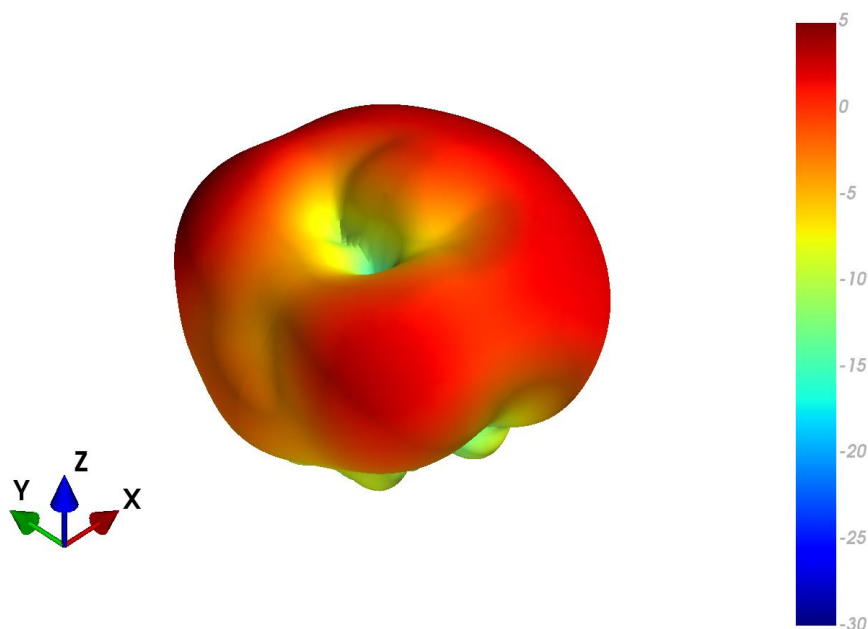


XZ Plane

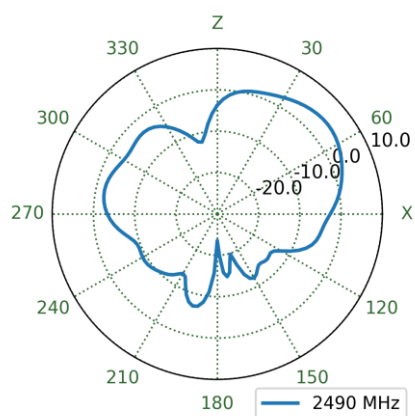


YZ Plane

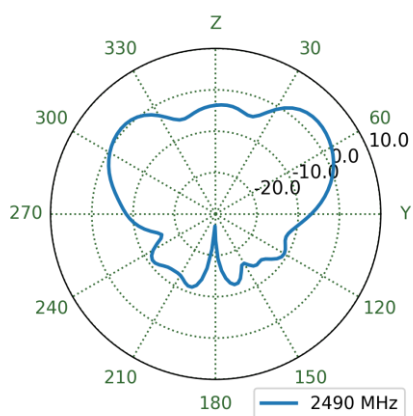


XY Plane

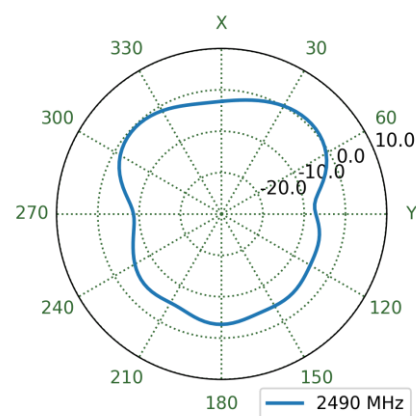


7.35 MIMO2 LTE Free Space Patterns at 2490 MHz

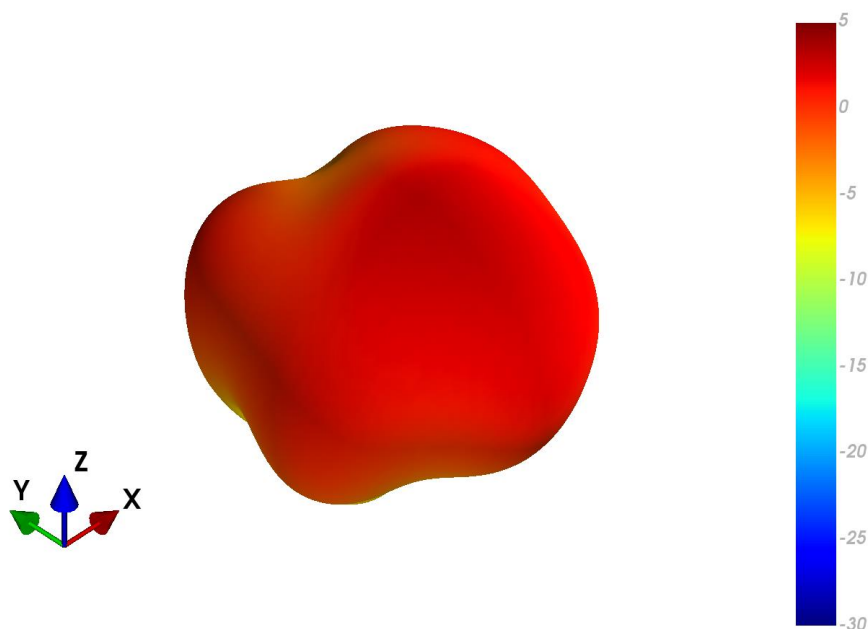


XZ Plane

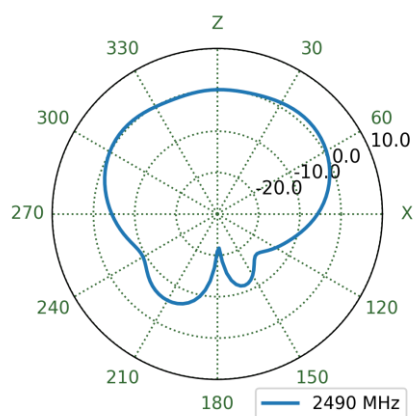


YZ Plane

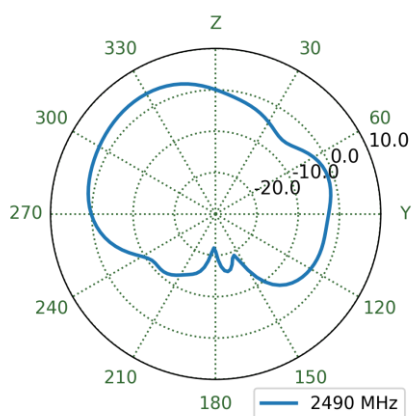


XY Plane

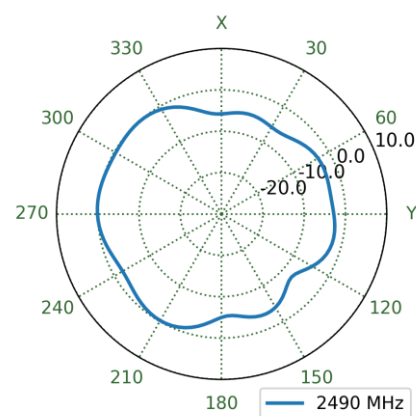


7.36 MIMO2 LTE Ground Plane Patterns at 2490 MHz

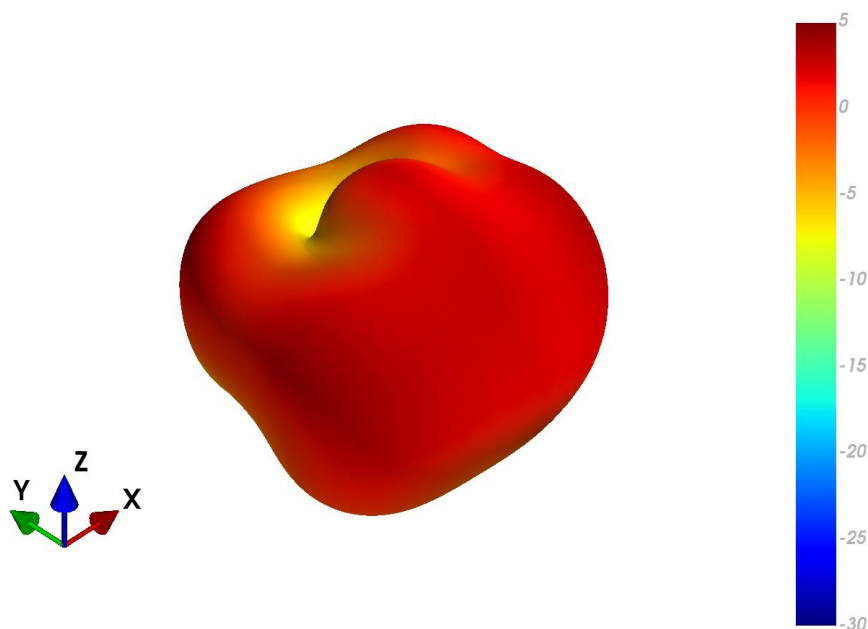


XZ Plane

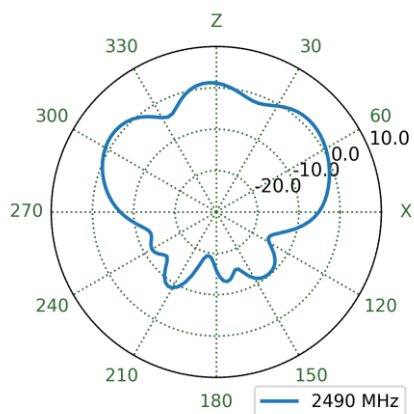


YZ Plane

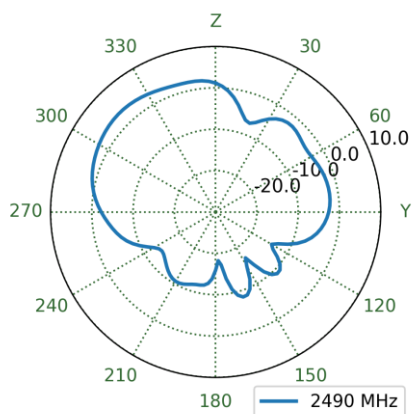


XY Plane

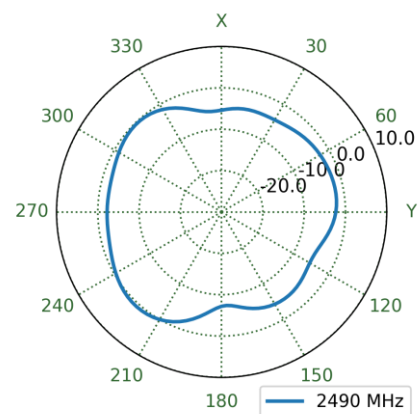


7.37 MIMO1 LTE Free Space Patterns at 4150 MHz

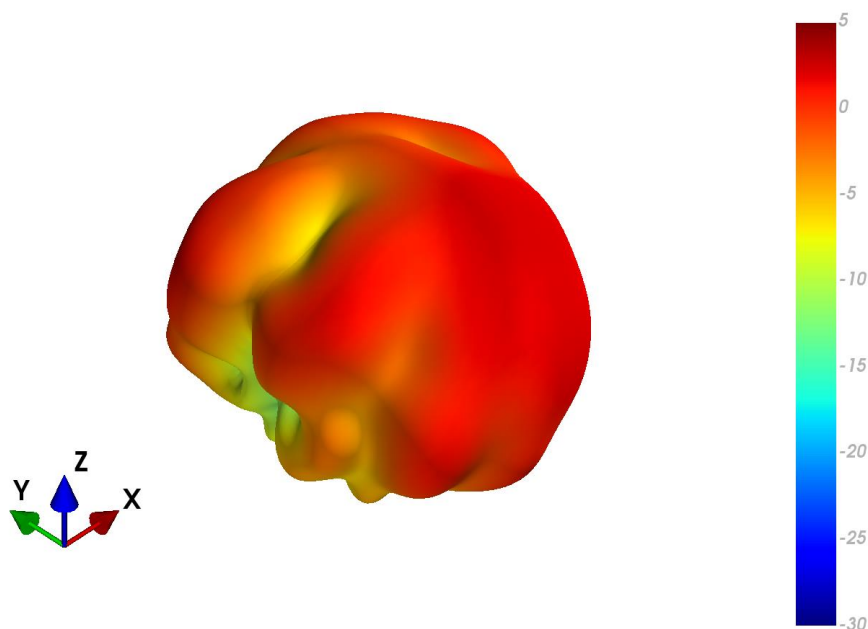


XZ Plane

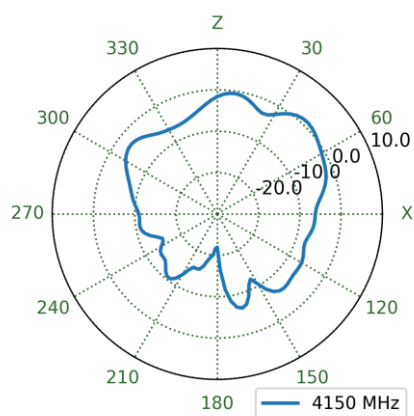


YZ Plane

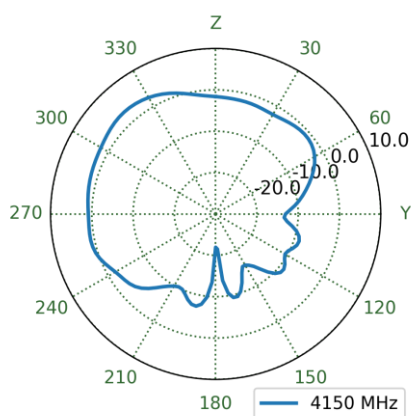


XY Plane

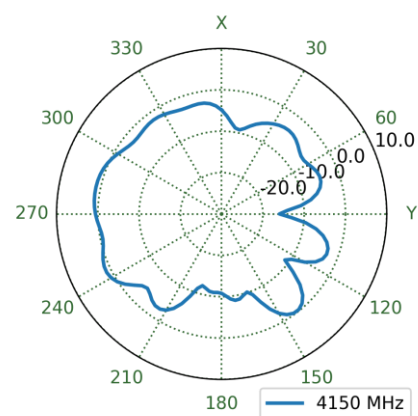


7.38 MIMO1 LTE Ground Plane Patterns at 4150 MHz

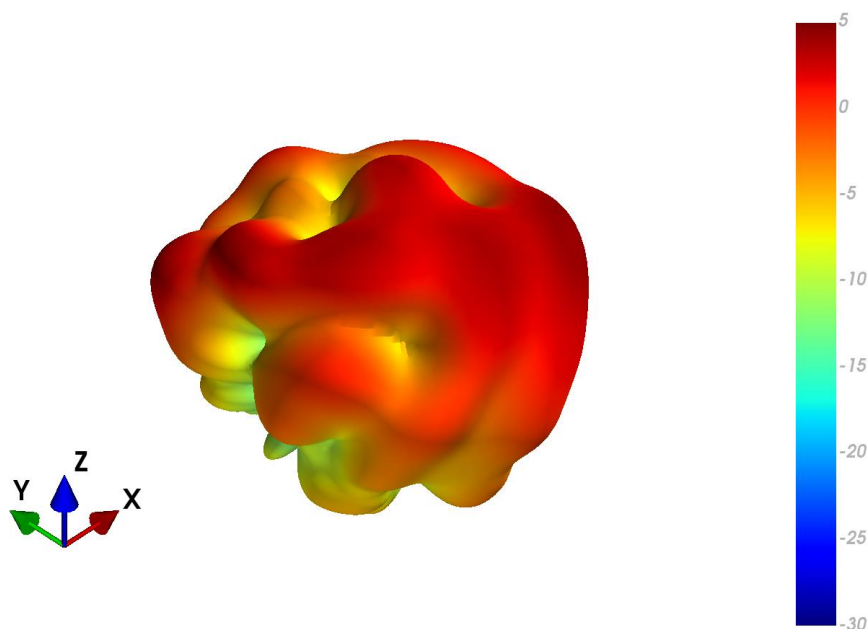


XZ Plane

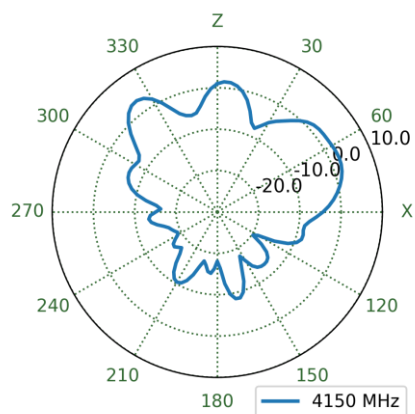


YZ Plane

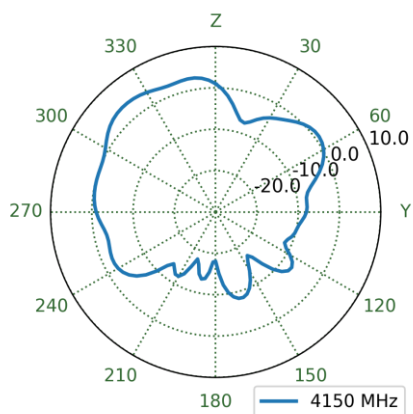


XY Plane

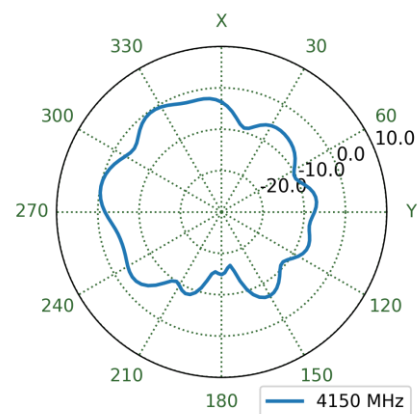


7.39 MIMO2 LTE Free Space Patterns at 4150 MHz

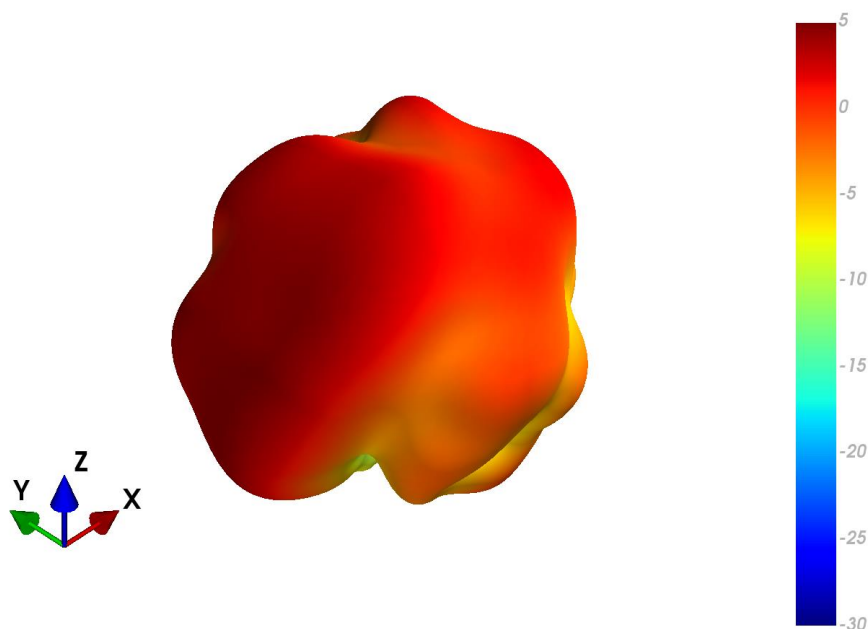


XZ Plane

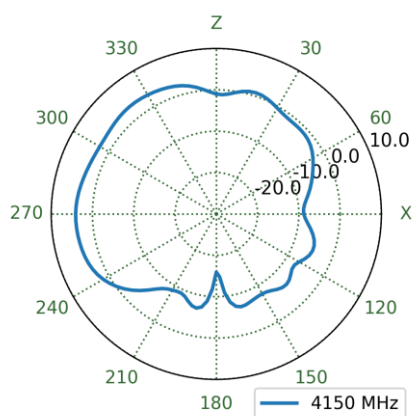


YZ Plane

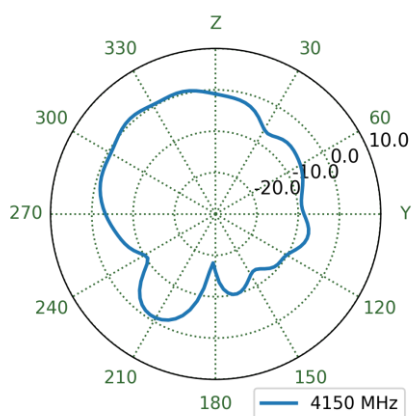


XY Plane

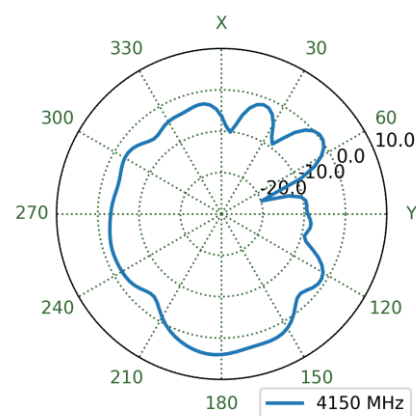


7.40 MIMO2 LTE Ground Plane Patterns at 4150 MHz

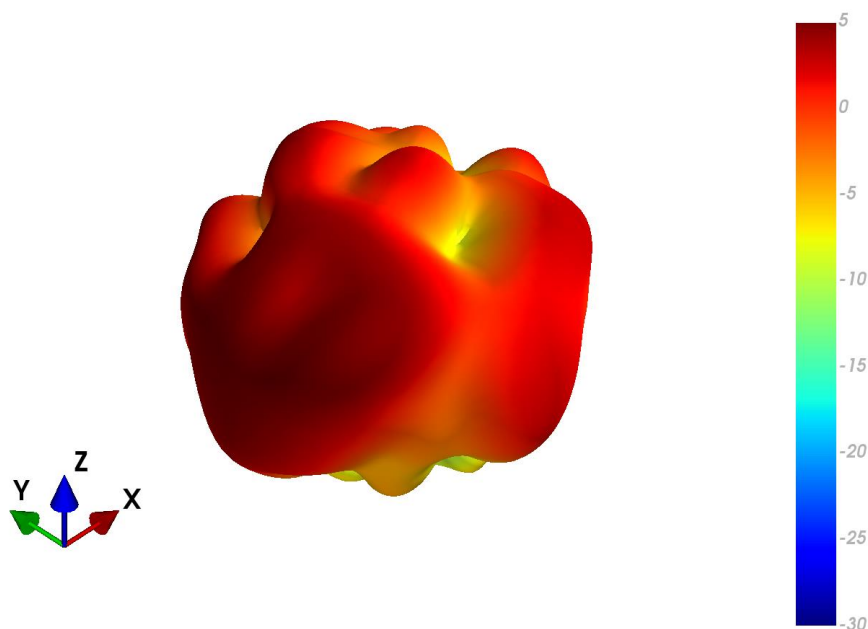


XZ Plane

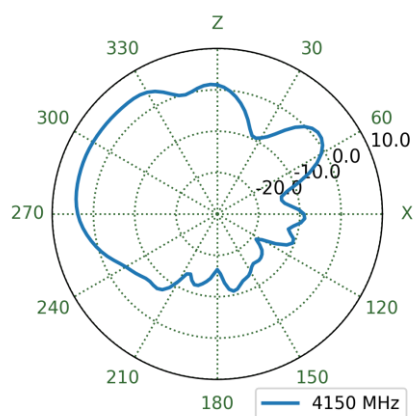


YZ Plane

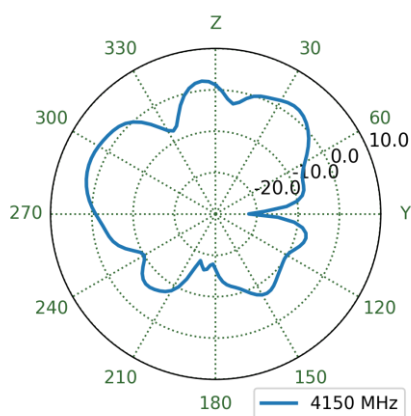


XY Plane

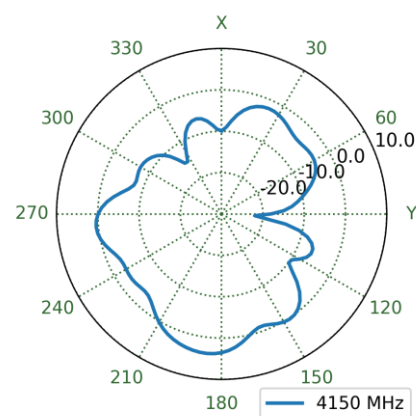


7.41 MIMO1 LTE Free Space Patterns at 5540 MHz

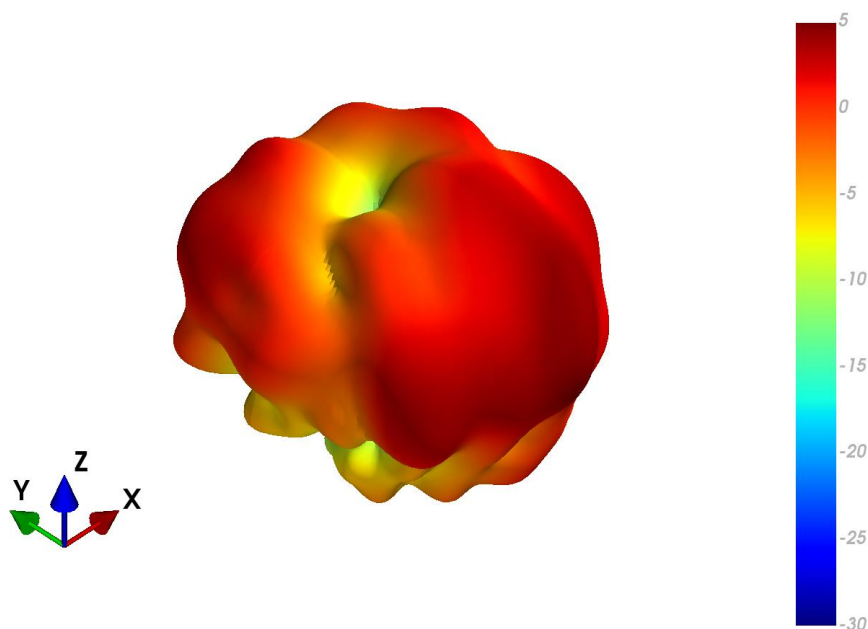


XZ Plane

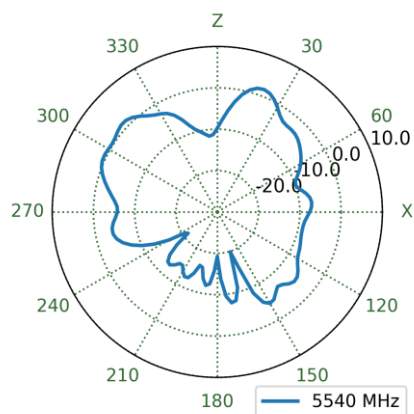


YZ Plane

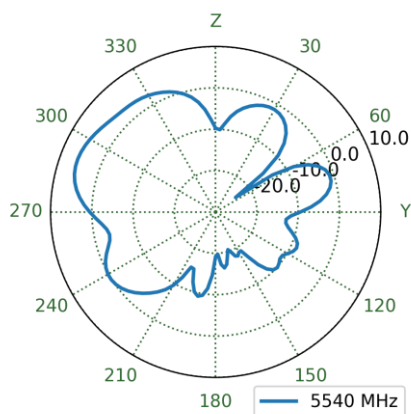


XY Plane

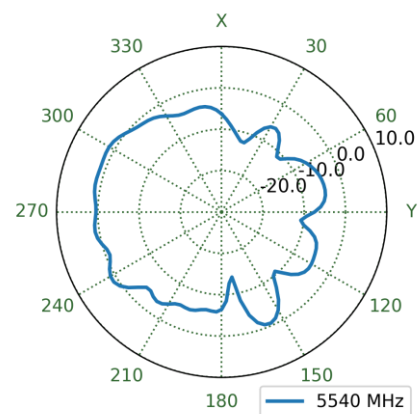


7.42 MIMO1 LTE Ground Plane Patterns at 5540 MHz

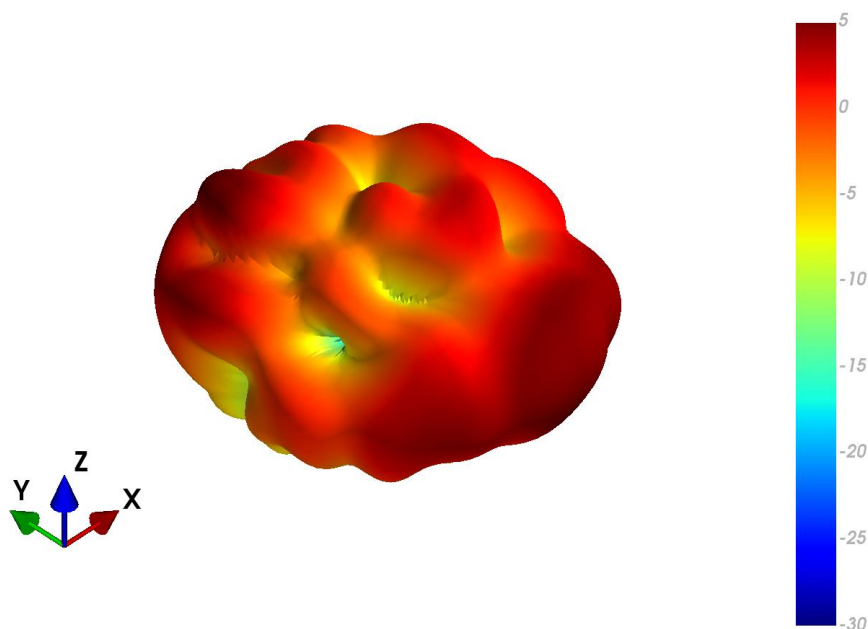


XZ Plane

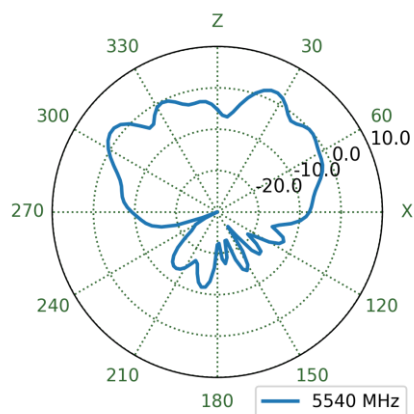


YZ Plane

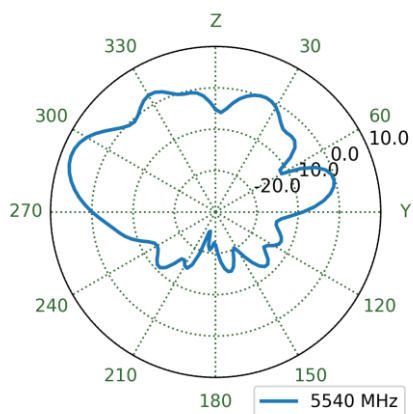


XY Plane

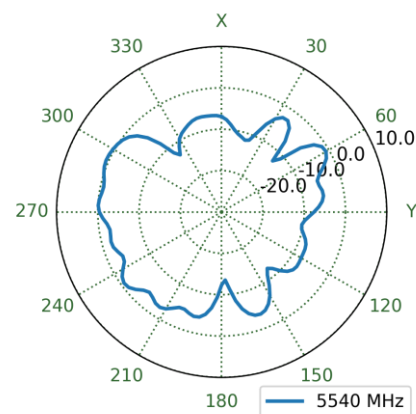


7.43 MIMO2 LTE Free Space Patterns at 5540 MHz

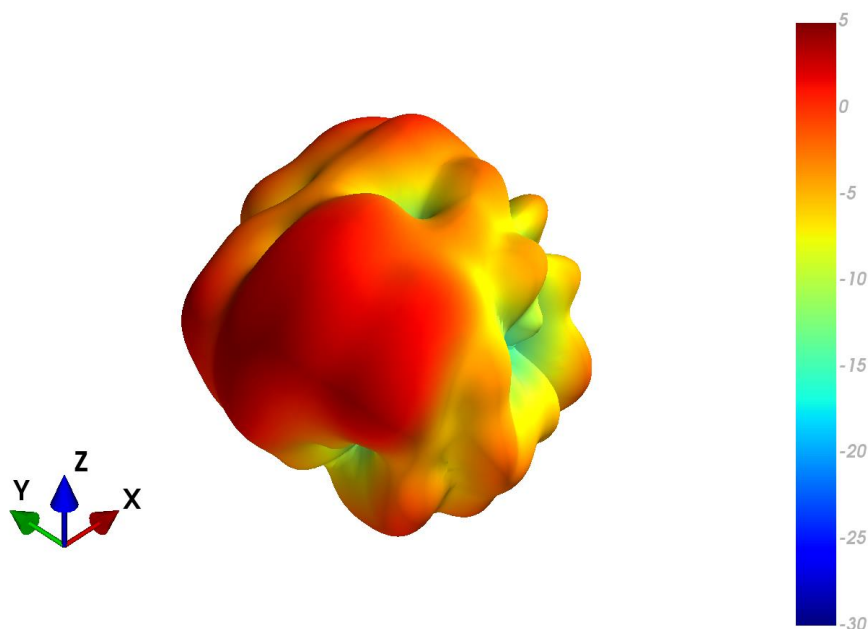


XZ Plane

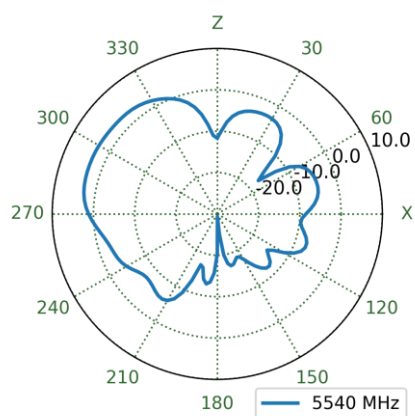


YZ Plane

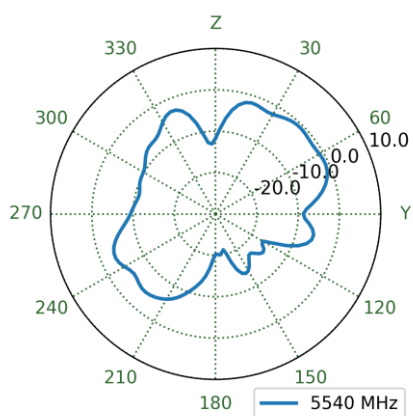


XY Plane

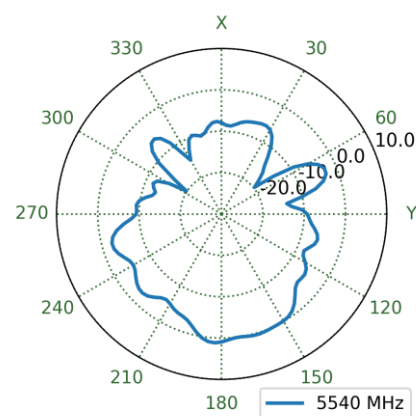


7.44 MIMO2 LTE Ground Plane Patterns at 5540 MHz

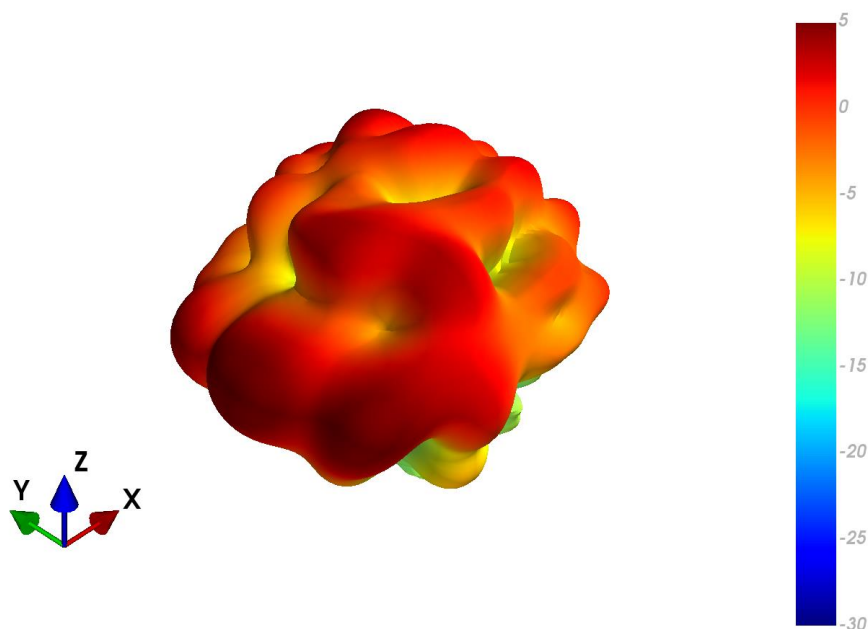


XZ Plane

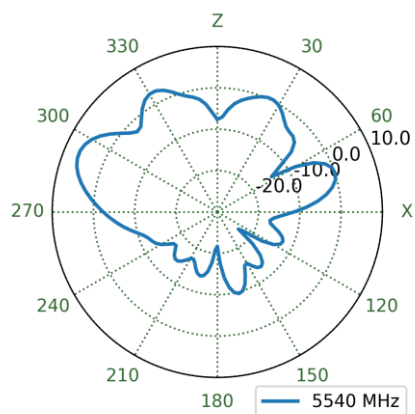


YZ Plane

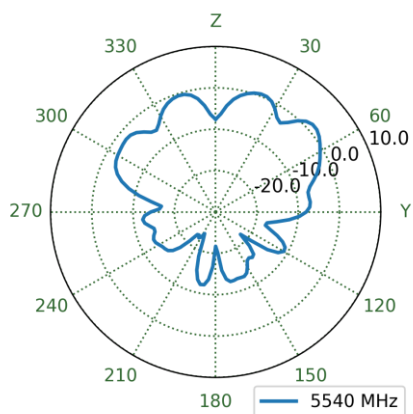


XY Plane

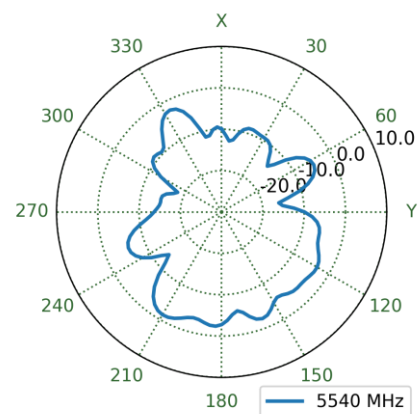


7.45 MIMO1 Wi-Fi Free Space Patterns at 2400 MHz

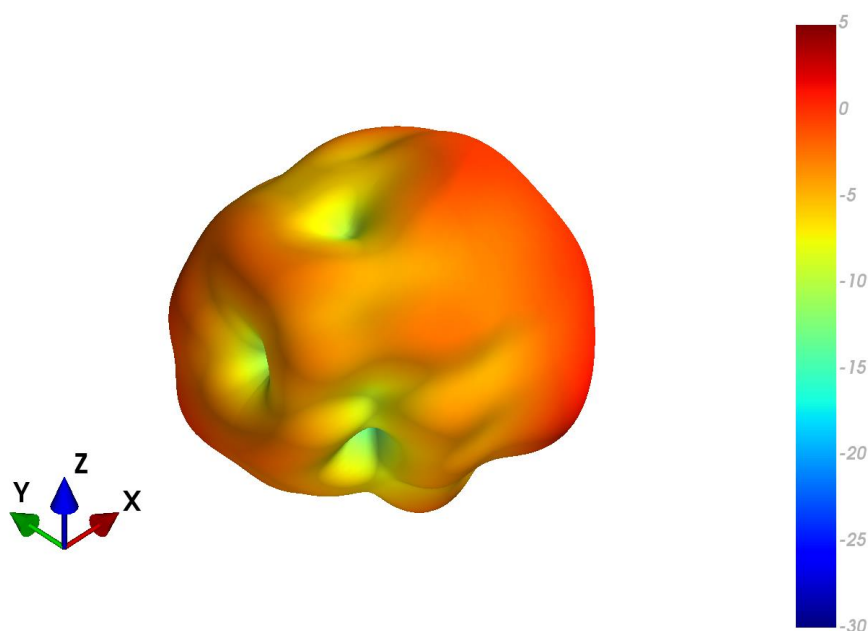


XZ Plane

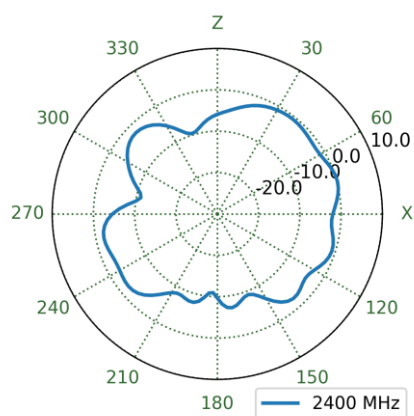


YZ Plane

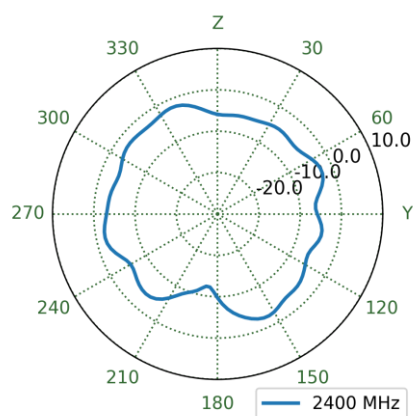


XY Plane

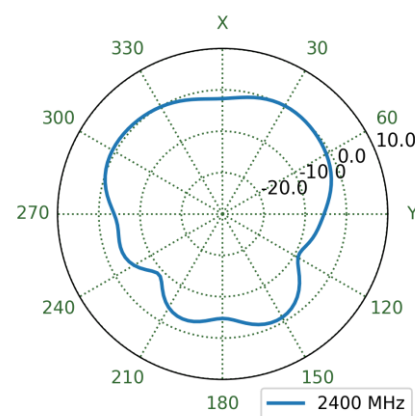


7.46 MIMO1 Wi-Fi Ground Plane Patterns at 2400 MHz

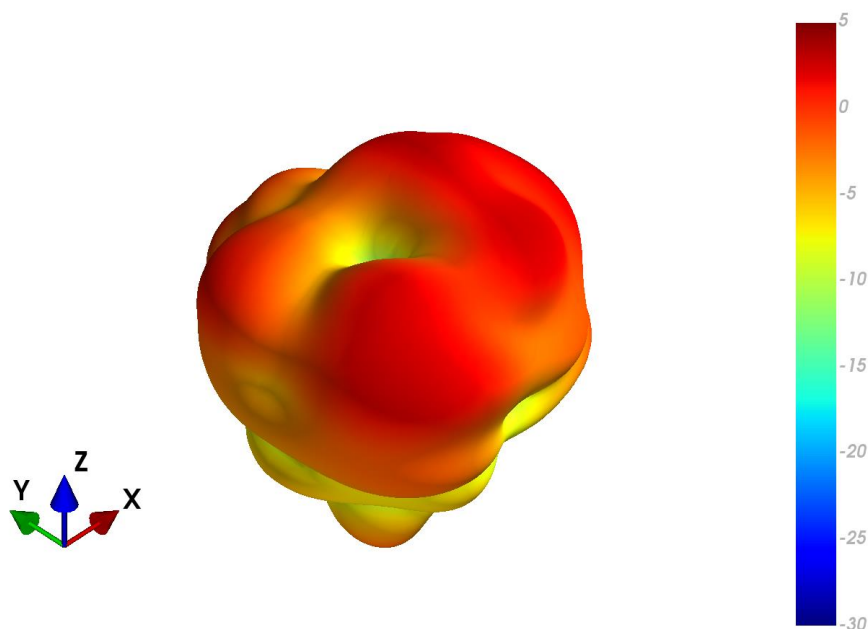


XZ Plane

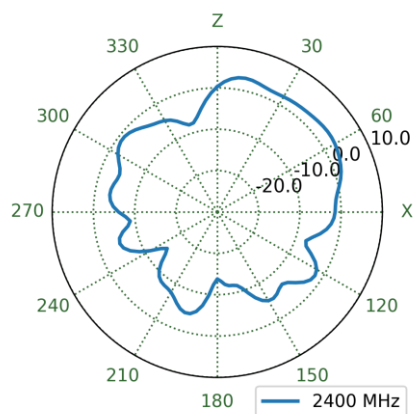


YZ Plane

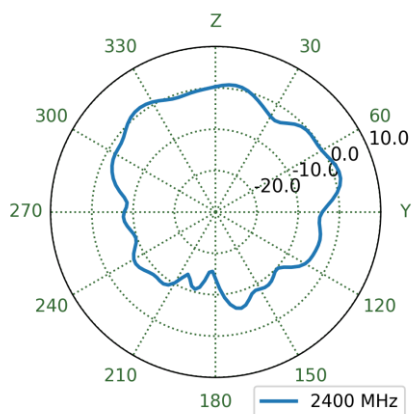


XY Plane

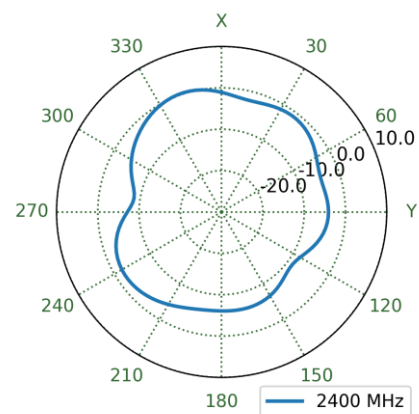


7.47 MIMO2 Wi-Fi Free Space Patterns at 2400 MHz

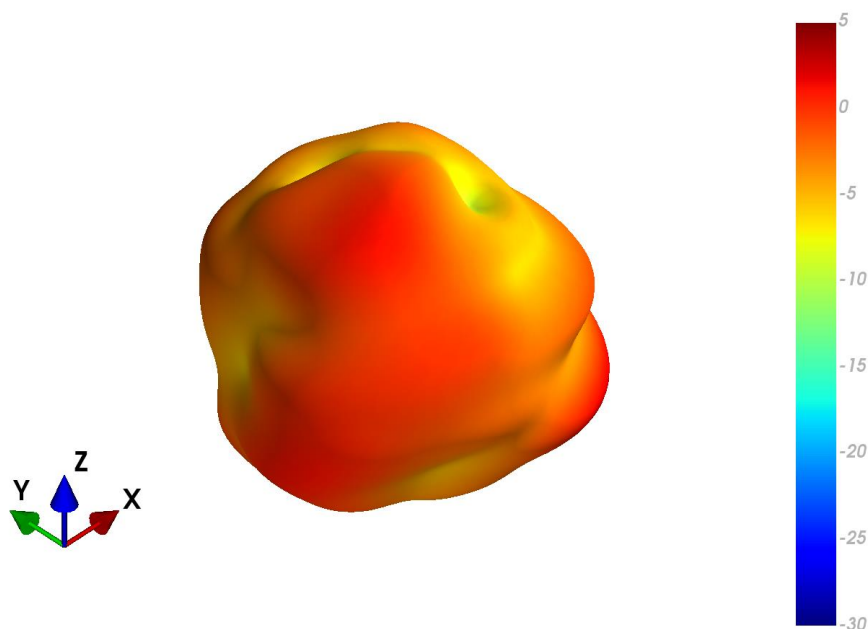


XZ Plane

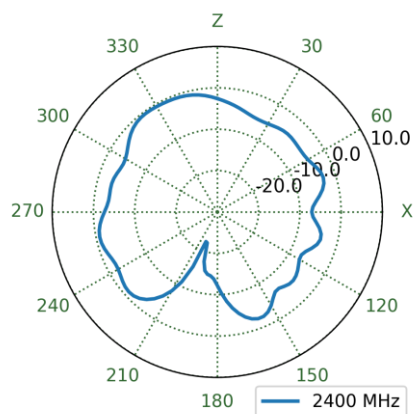


YZ Plane

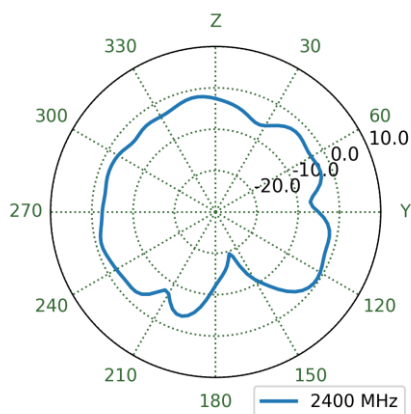


XY Plane

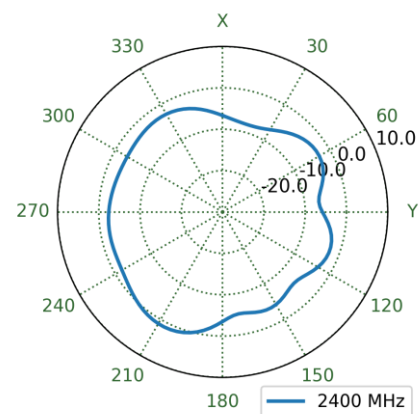


7.48 MIMO2 Wi-Fi Ground Plane Patterns at 2400 MHz

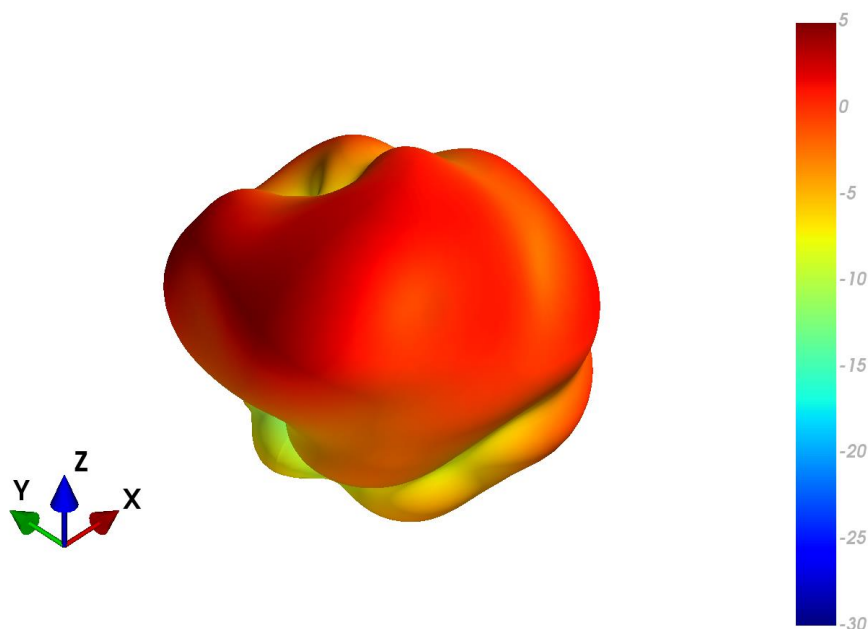


XZ Plane

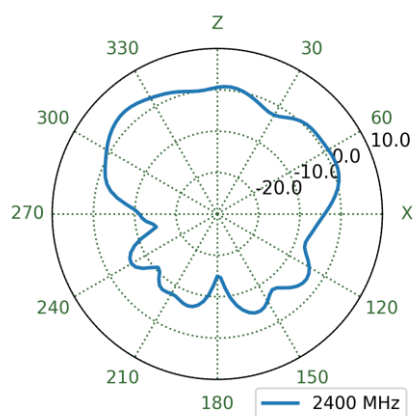


YZ Plane

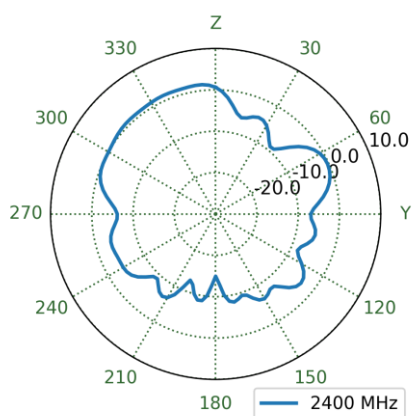


XY Plane

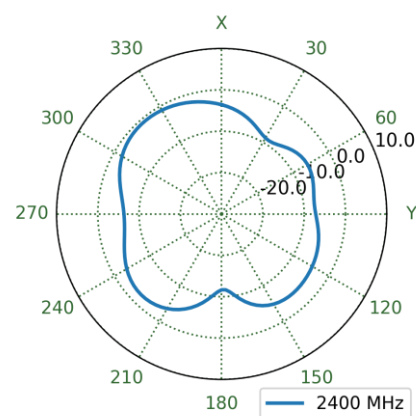


7.49 MIMO1 Wi-Fi Free Space Patterns at 2450 MHz

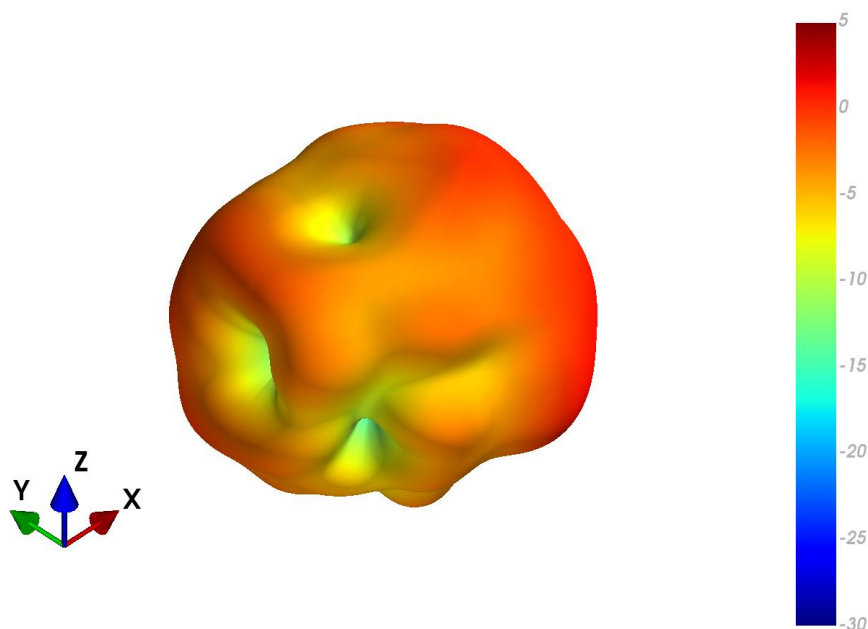


XZ Plane

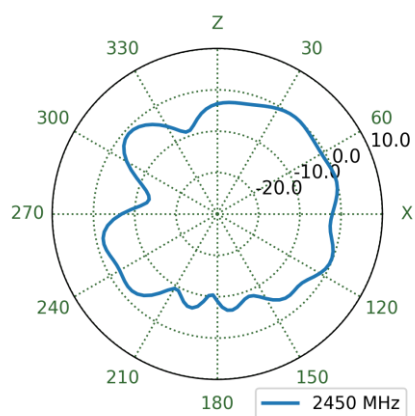


YZ Plane

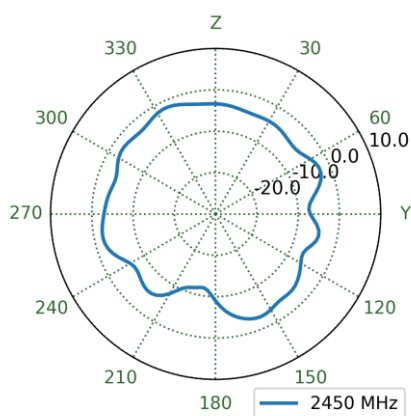


XY Plane

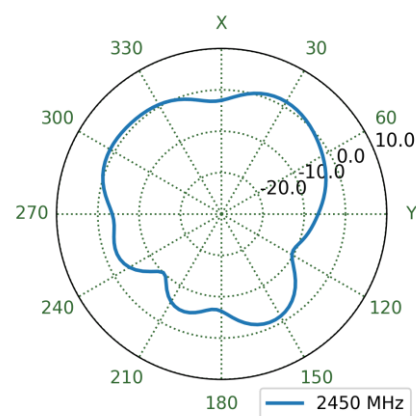


7.50 MIMO1 Wi-Fi Ground Plane Patterns at 2450 MHz

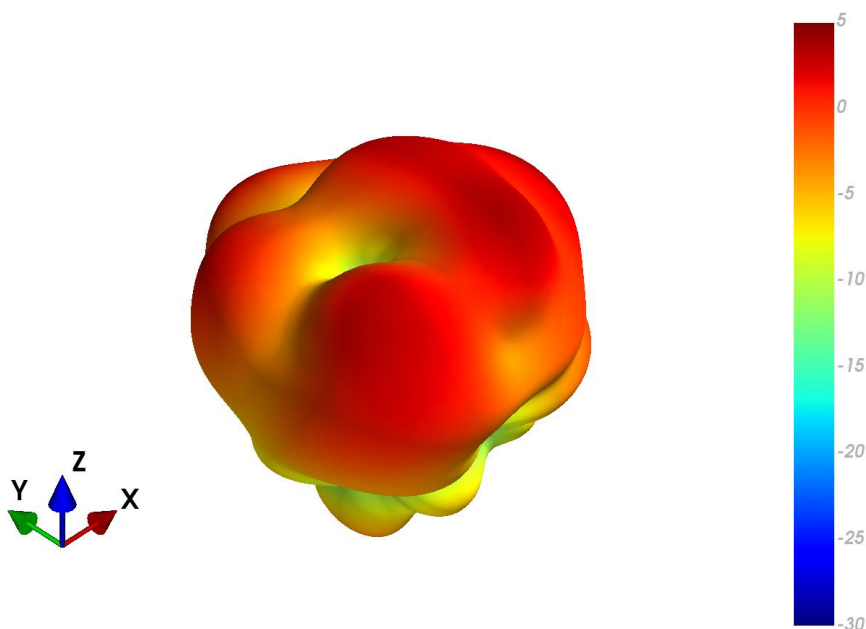


XZ Plane

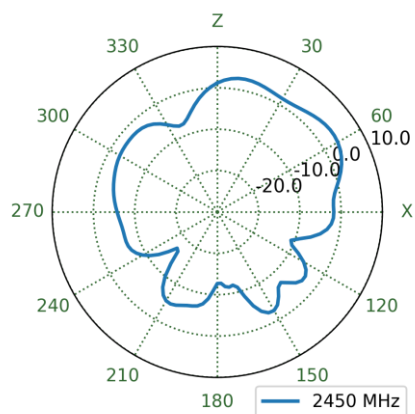


YZ Plane

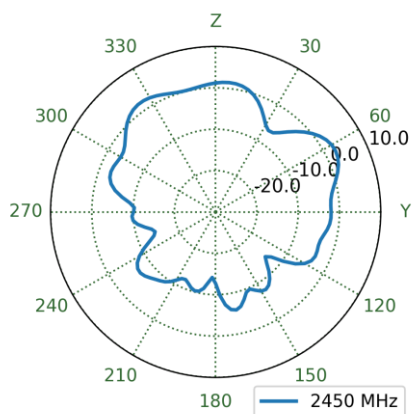


XY Plane

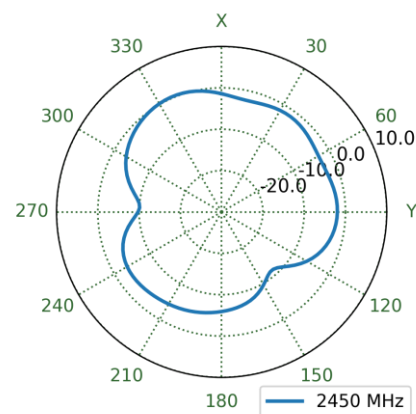


7.51 MIMO2 Wi-Fi Free Space Patterns at 2450 MHz

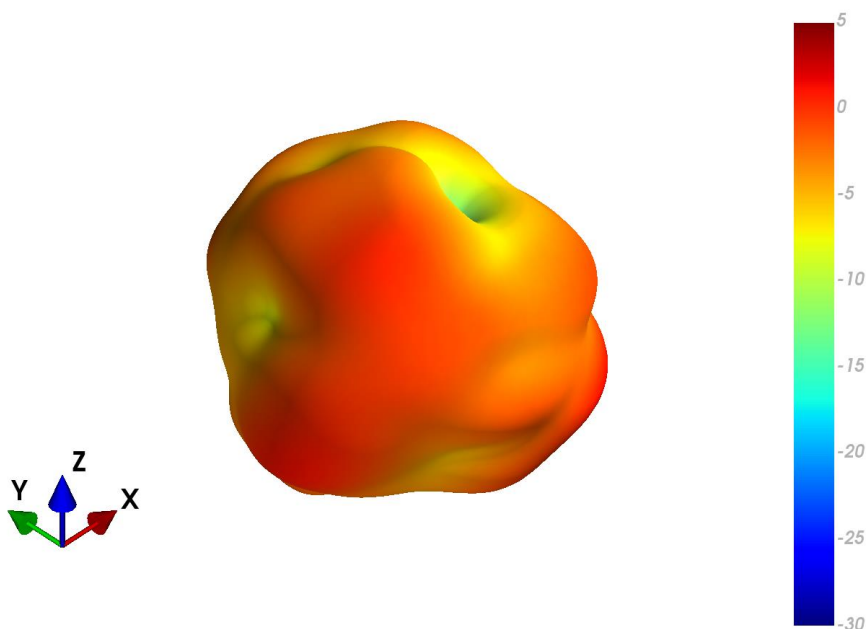


XZ Plane

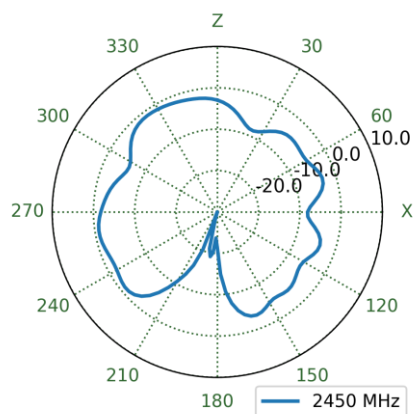


YZ Plane

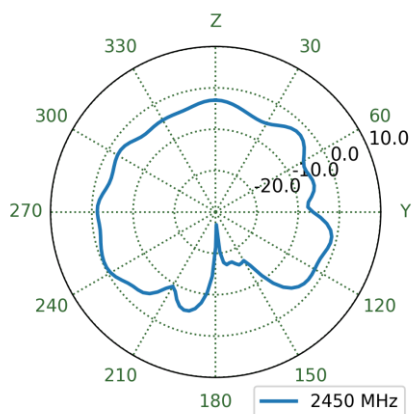


XY Plane

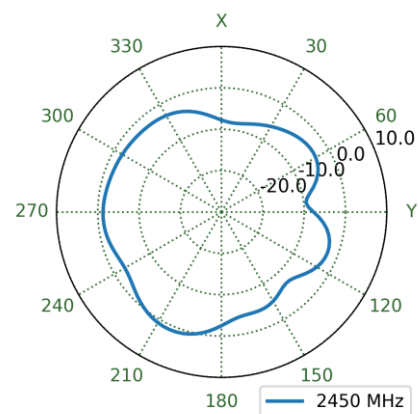


7.52 MIMO2 Wi-Fi Ground Plane Patterns at 2450 MHz

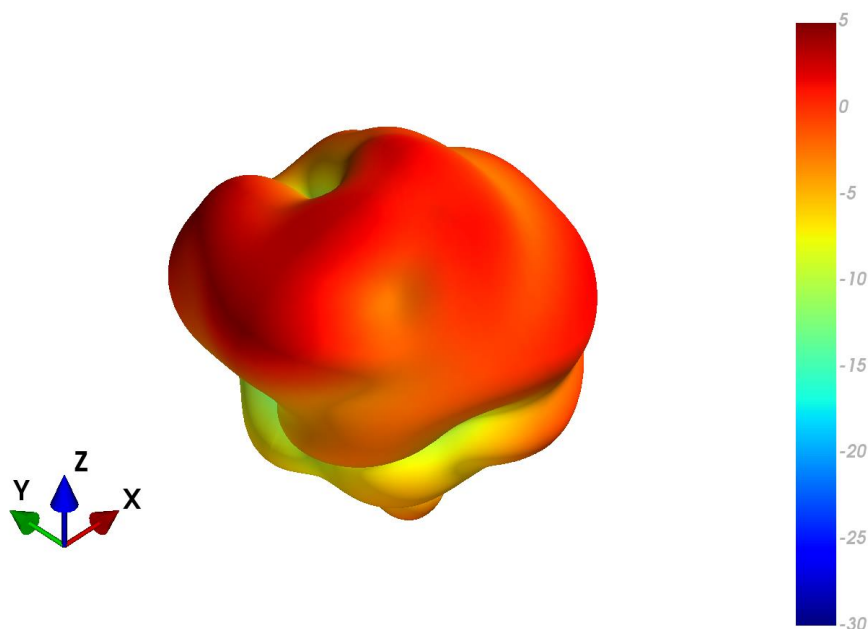


XZ Plane

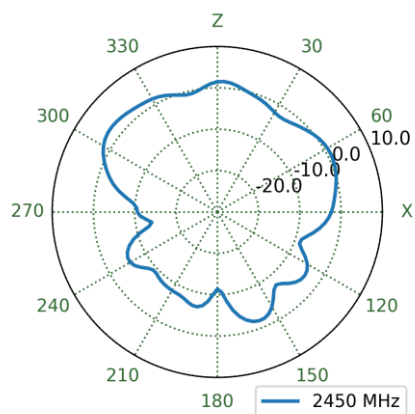


YZ Plane

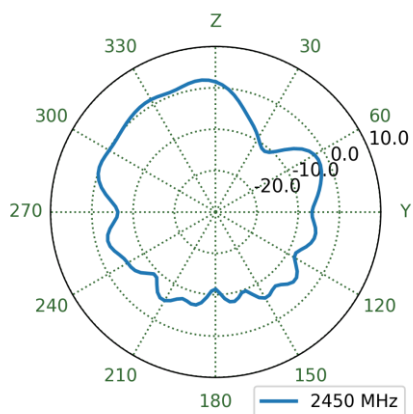


XY Plane

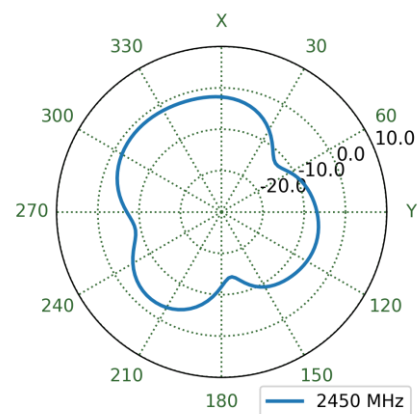


7.53 MIMO1 Wi-Fi Free Space Patterns at 2500 MHz

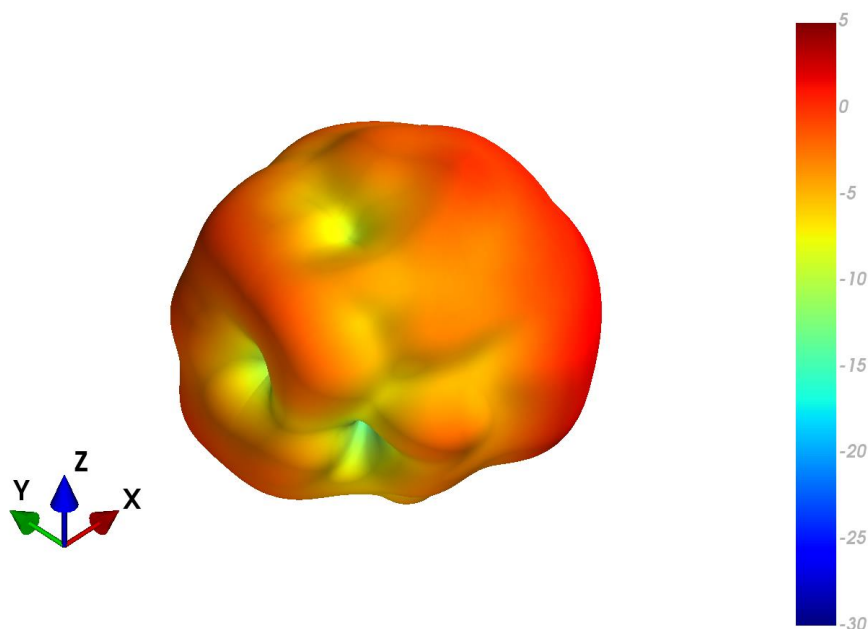


XZ Plane

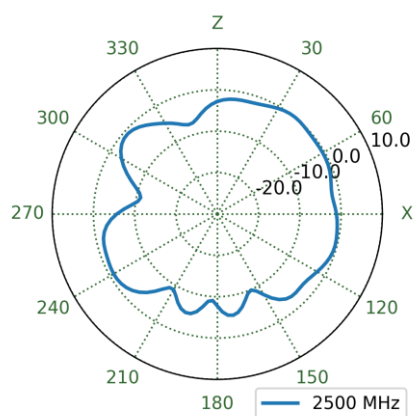


YZ Plane

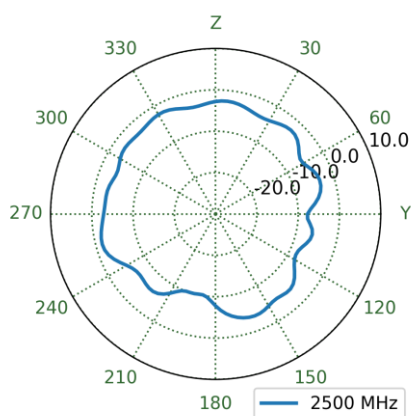


XY Plane

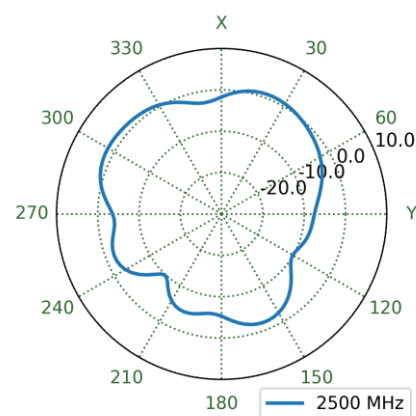


7.54 MIMO1 Wi-Fi Ground Plane Patterns at 2500 MHz

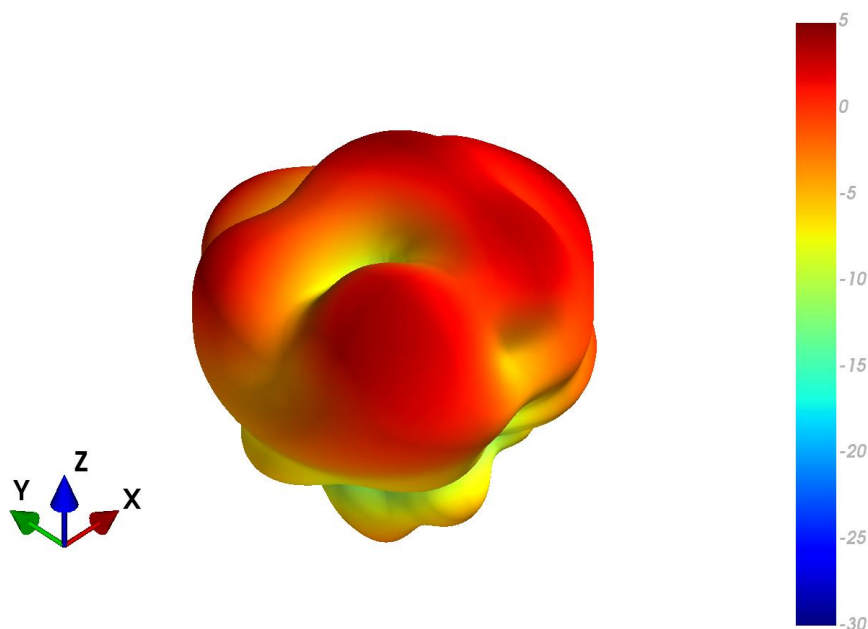


XZ Plane

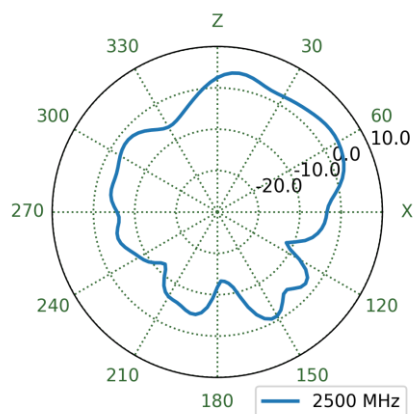


YZ Plane

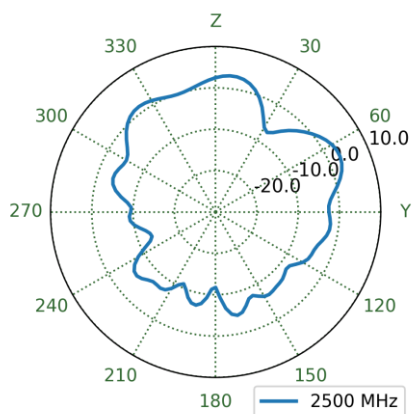


XY Plane

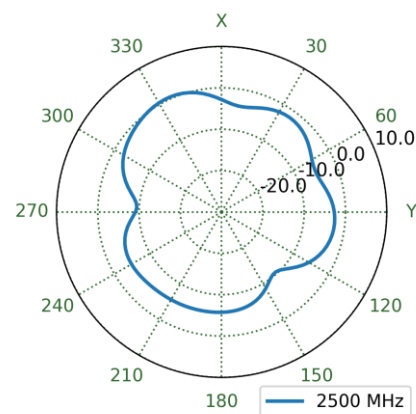


7.55 MIMO2 Wi-Fi Free Space Patterns at 2500 MHz

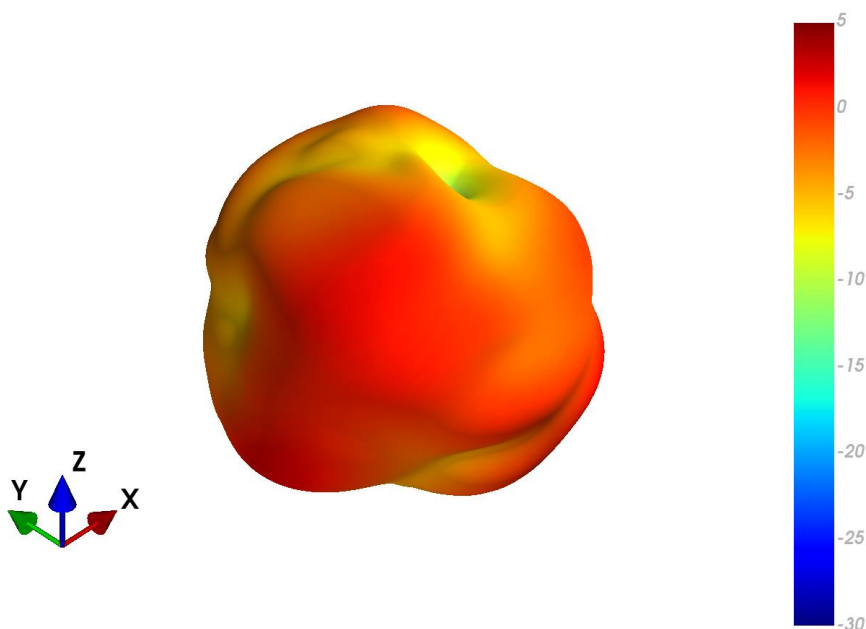


XZ Plane

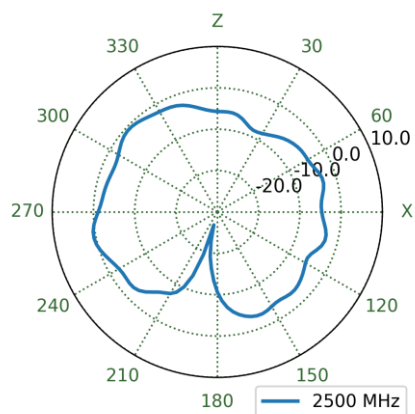


YZ Plane

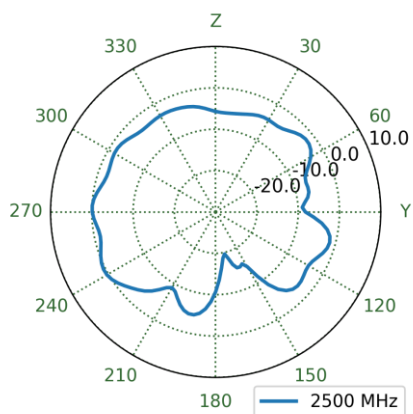


XY Plane

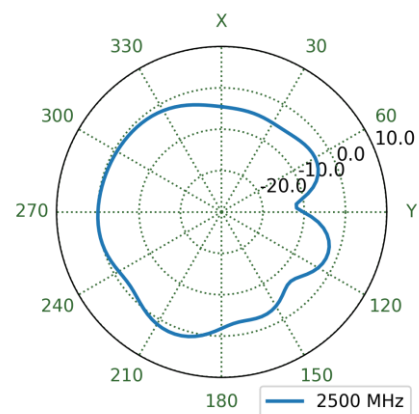


7.56 MIMO2 Wi-Fi Ground Plane Patterns at 2500 MHz

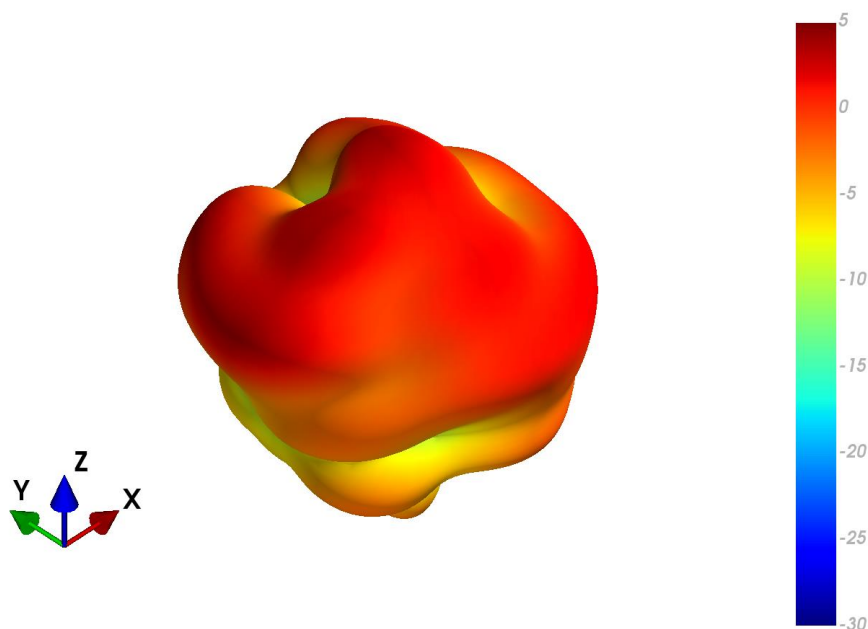


XZ Plane

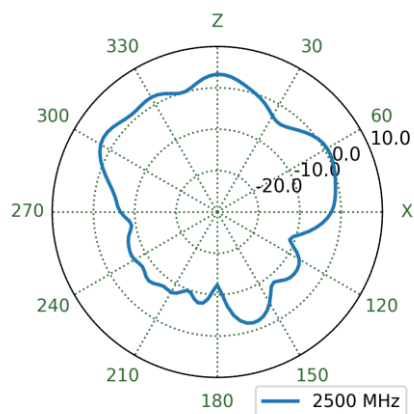


YZ Plane

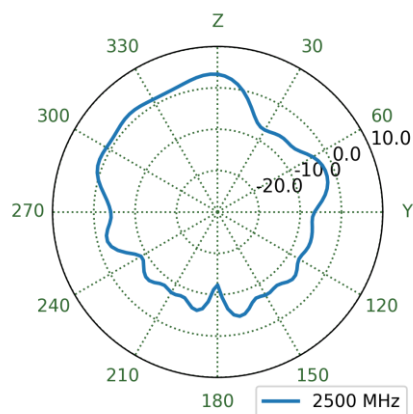


XY Plane

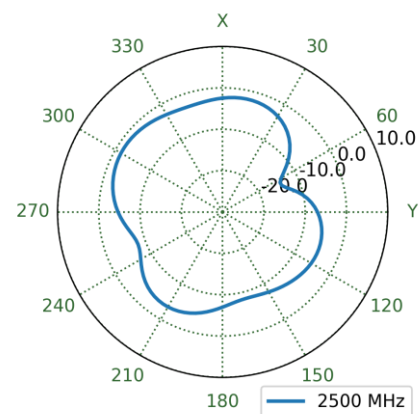


7.57 MIMO1 Wi-Fi Free Space Patterns at 5150 MHz

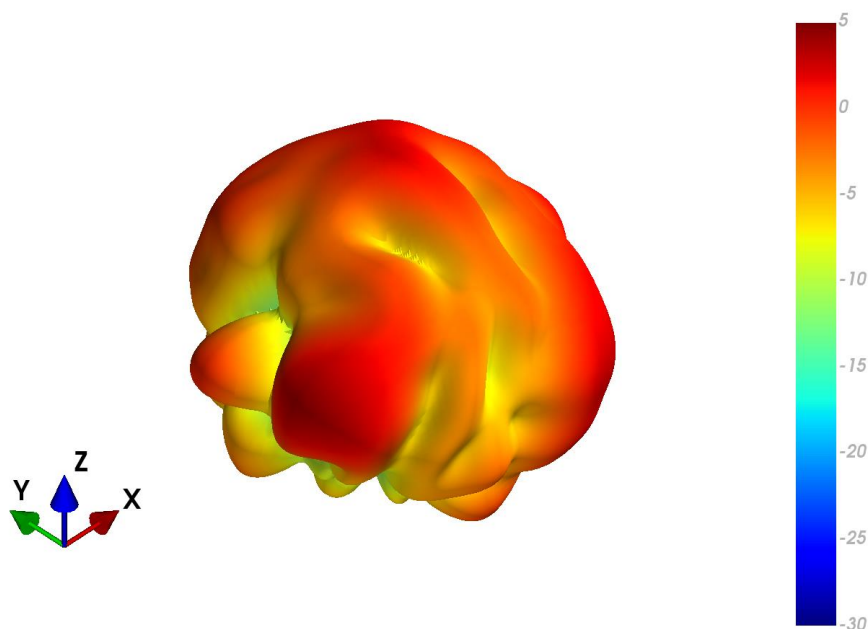


XZ Plane

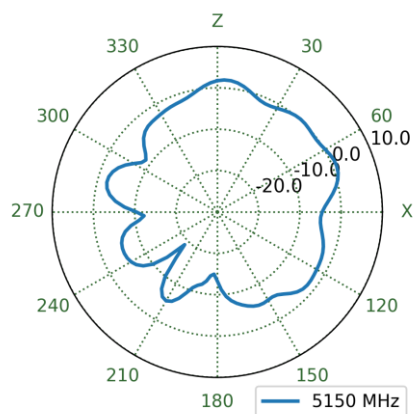


YZ Plane

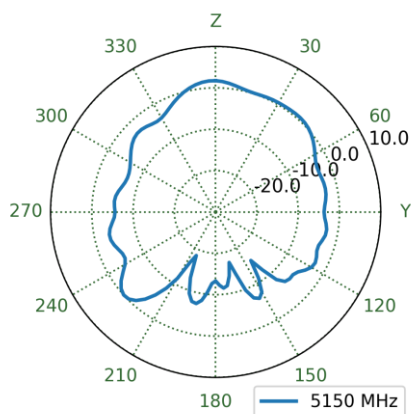


XY Plane

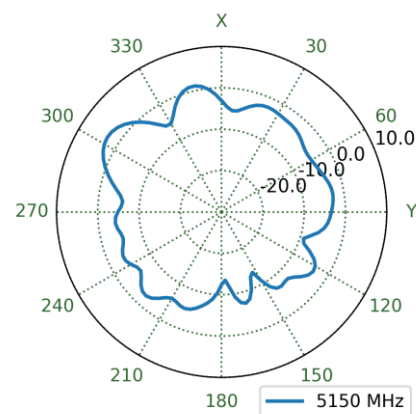


7.58 MIMO1 Wi-Fi Ground Plane Patterns at 5150 MHz

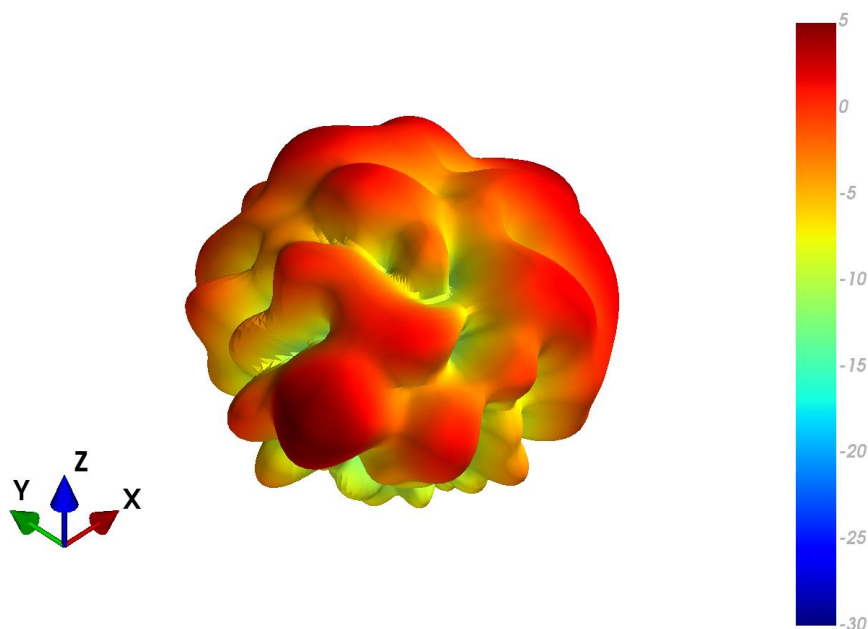


XZ Plane

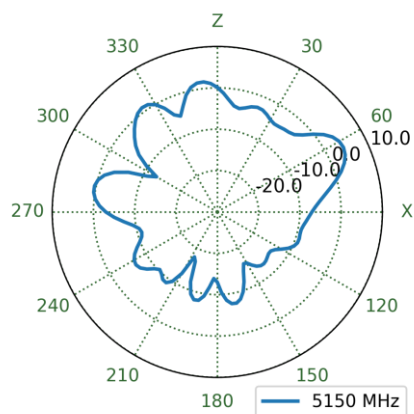


YZ Plane

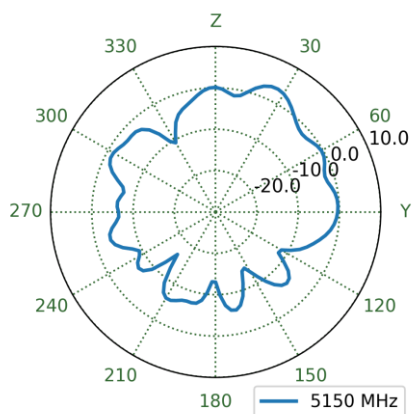


XY Plane

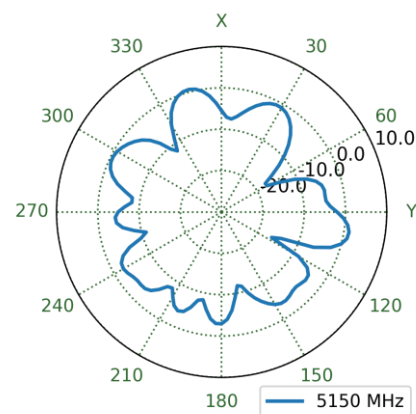


7.59 MIMO2 Wi-Fi Free Space Patterns at 5150 MHz

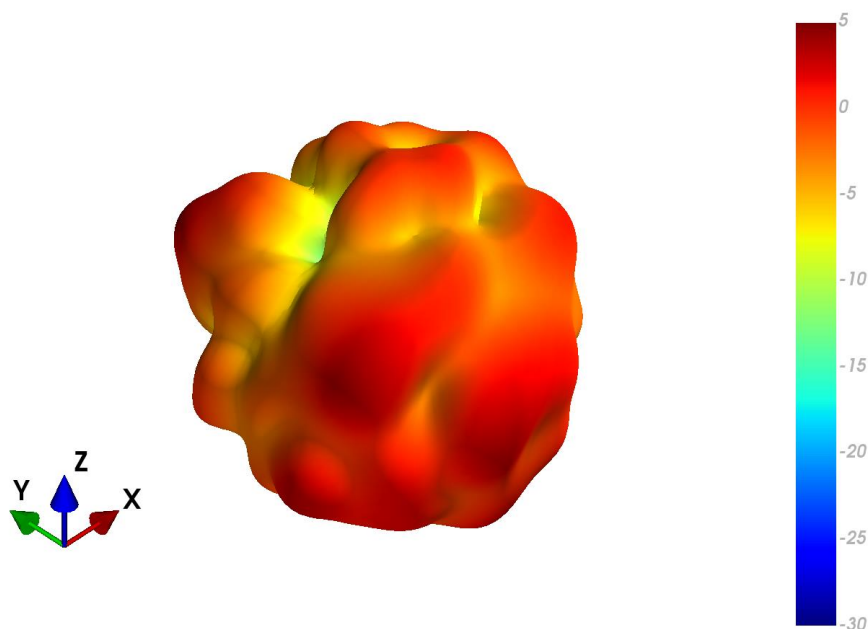


XZ Plane

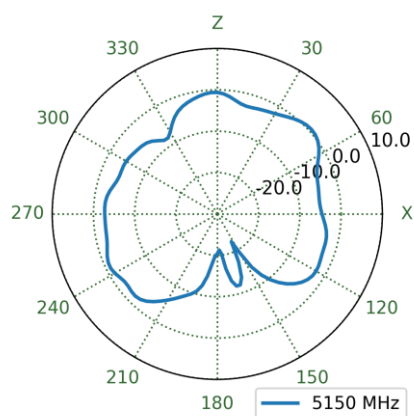


YZ Plane

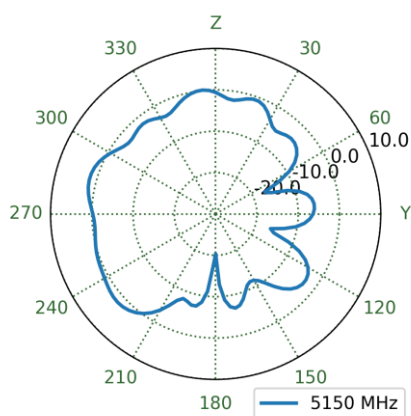


XY Plane

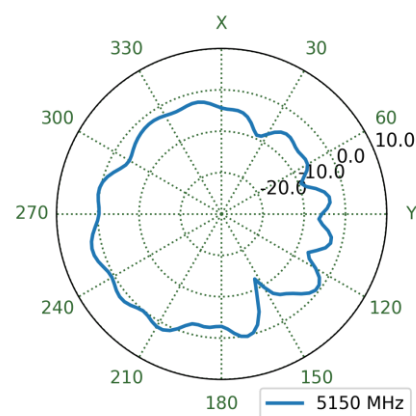


7.60 MIMO2 Wi-Fi Ground Plane Patterns at 5150 MHz

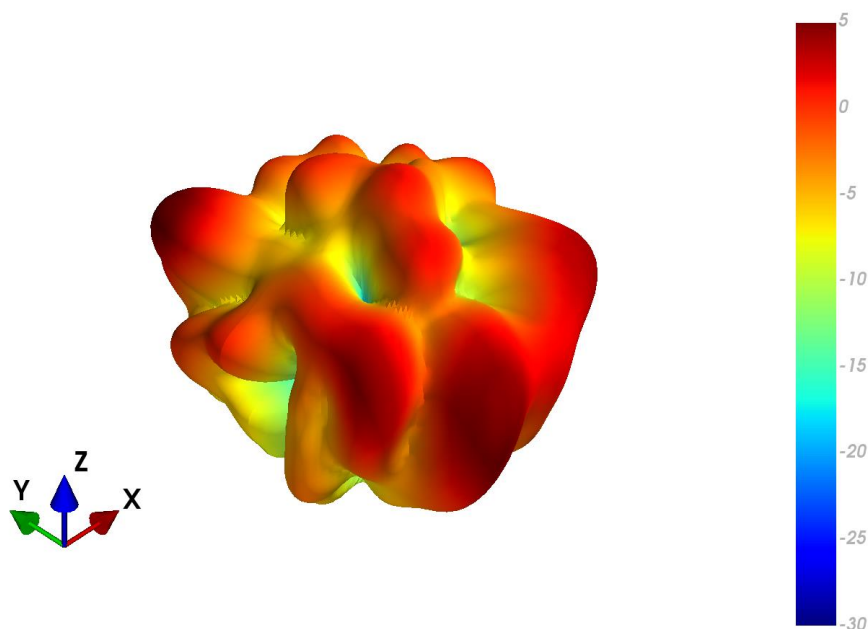


XZ Plane

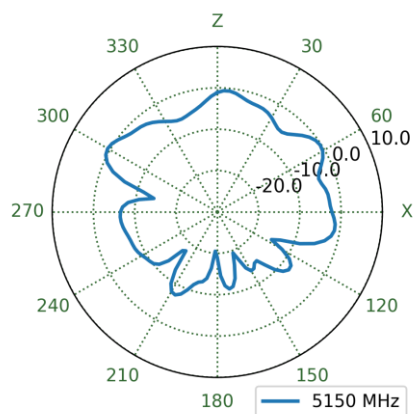


YZ Plane

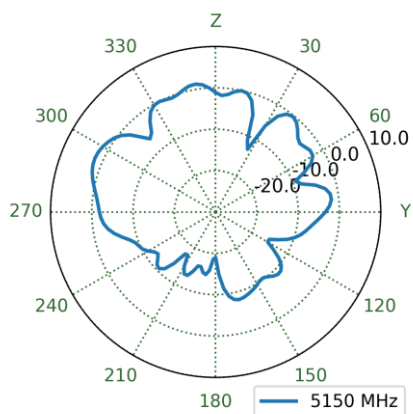


XY Plane

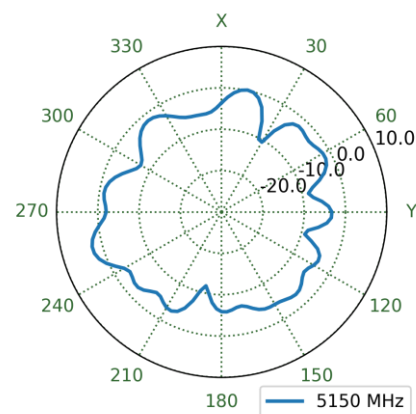


7.61 MIMO1 Wi-Fi Free Space Patterns at 5550 MHz

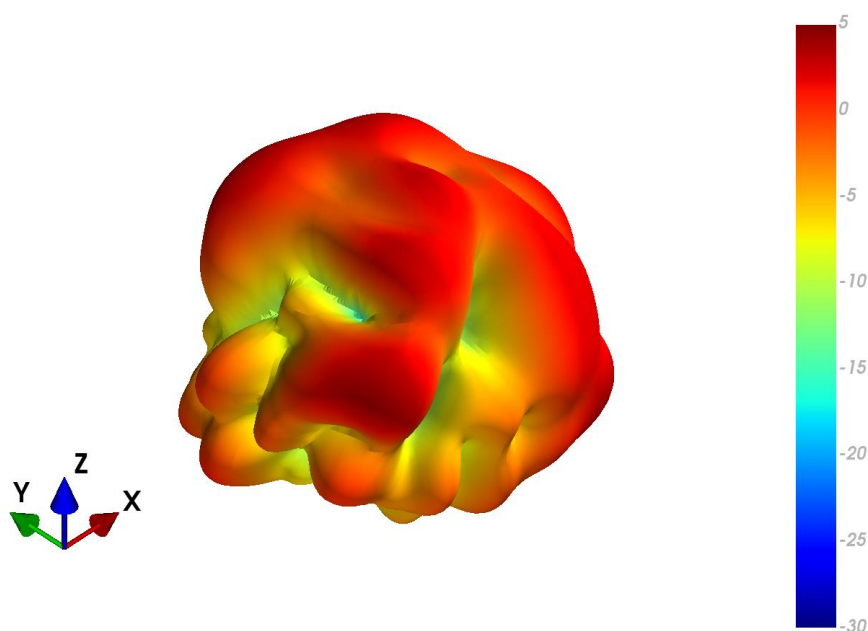


XZ Plane

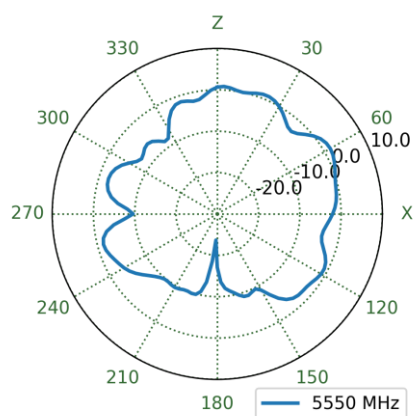


YZ Plane

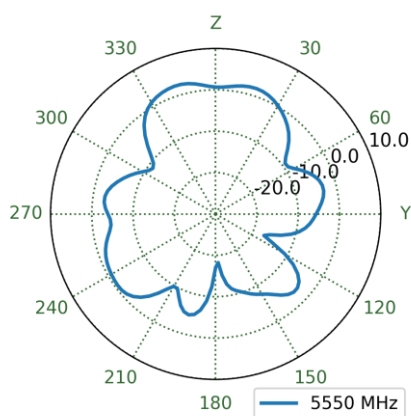


XY Plane

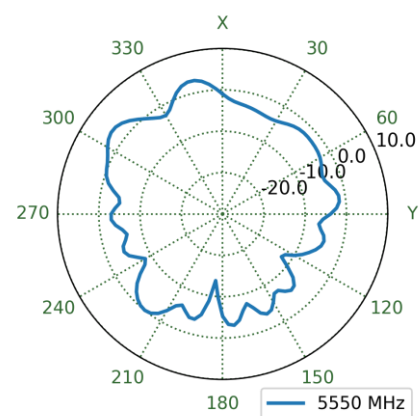


7.62 MIMO1 Wi-Fi Ground Plane Patterns at 5550 MHz

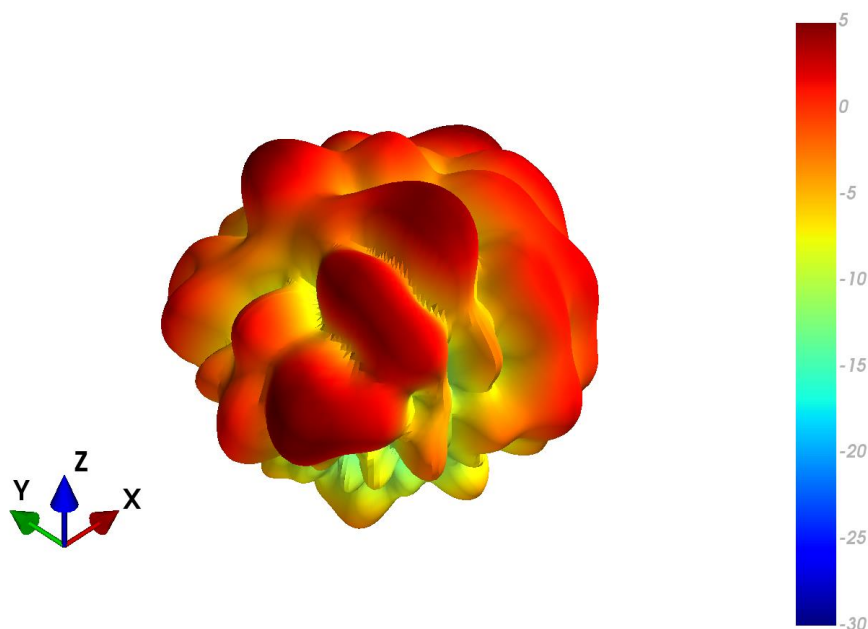


XZ Plane

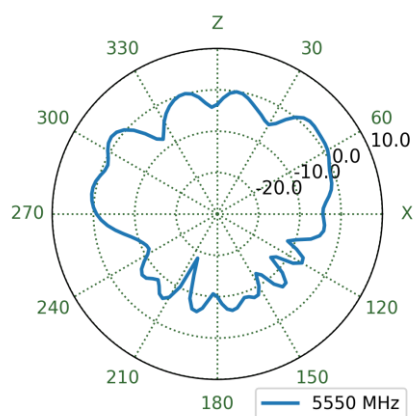


YZ Plane

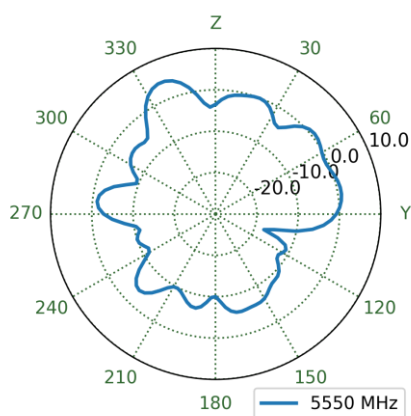


XY Plane

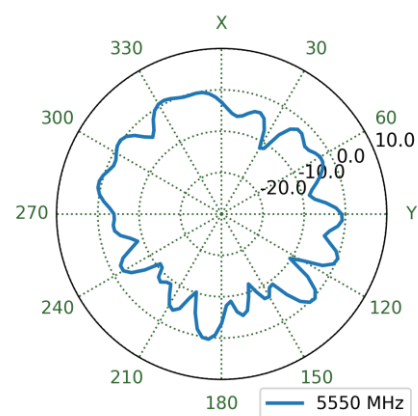


7.63 MIMO2 Wi-Fi Free Space Patterns at 5550 MHz

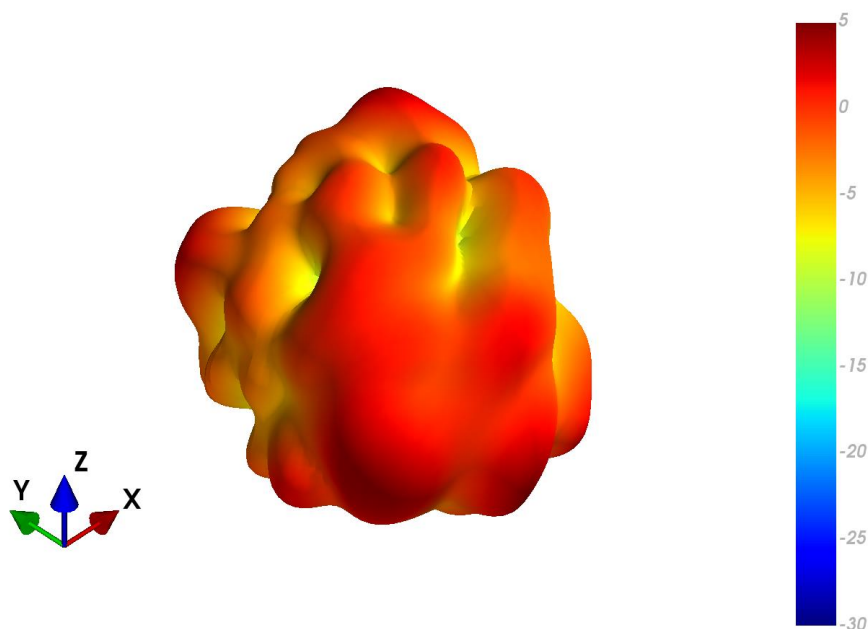


XZ Plane

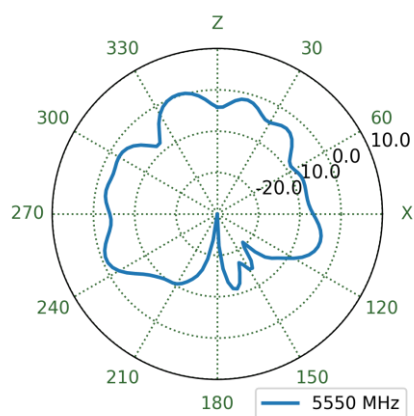


YZ Plane

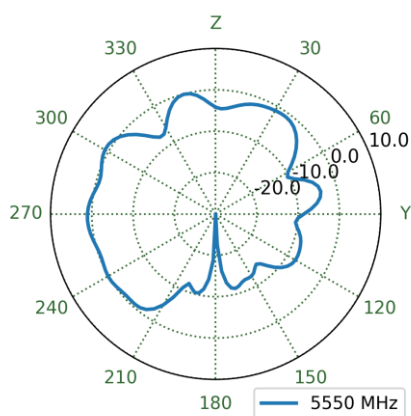


XY Plane

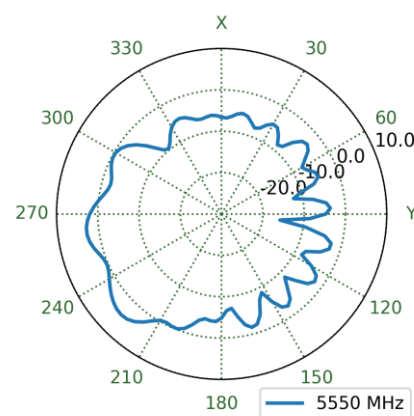


7.64 MIMO2 Wi-Fi Ground Plane Patterns at 5550 MHz

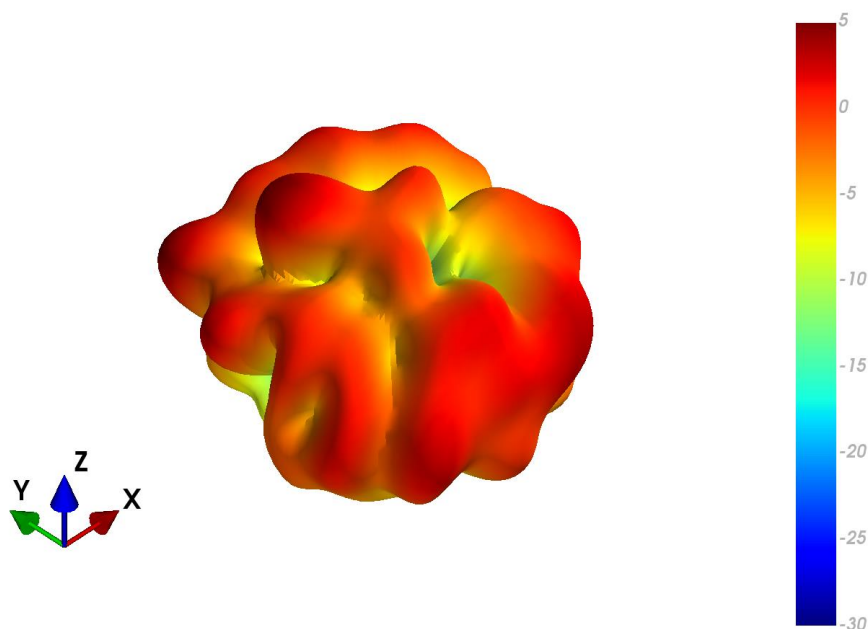


XZ Plane

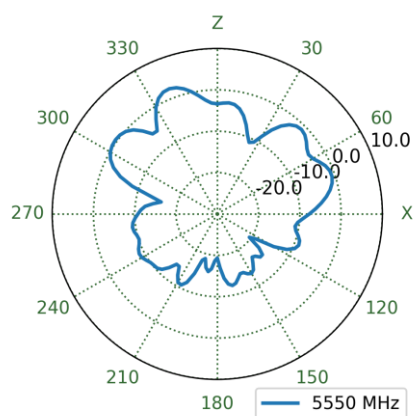


YZ Plane

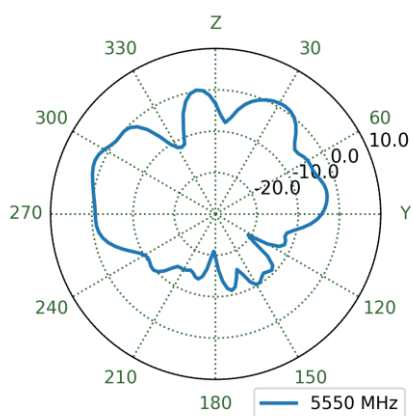


XY Plane

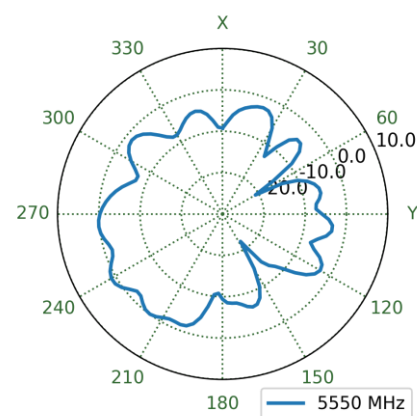


7.65 MIMO1 Wi-Fi Free Space Patterns at 5850 MHz

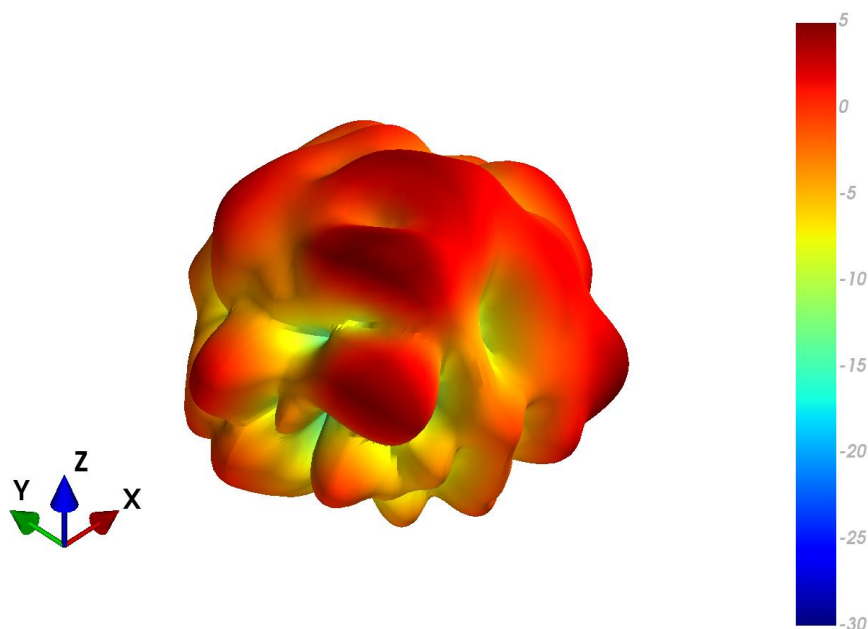


XZ Plane

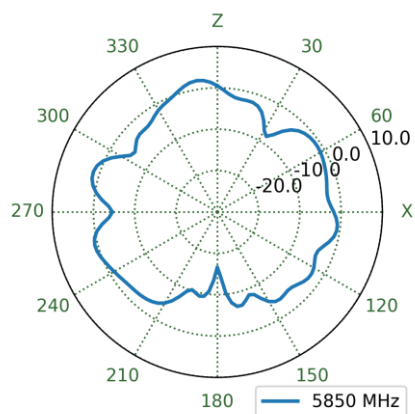


YZ Plane

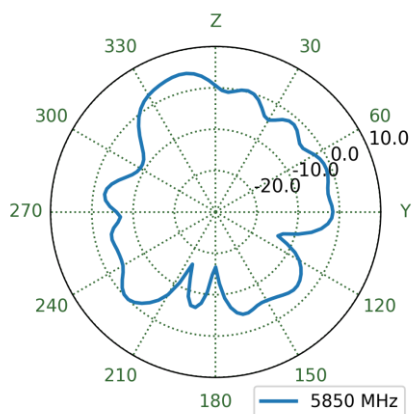


XY Plane

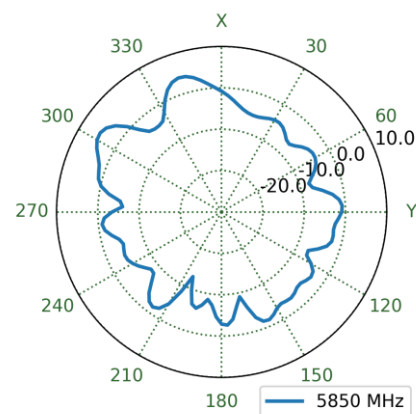


7.66 MIMO1 Wi-Fi Ground Plane Patterns at 5850 MHz

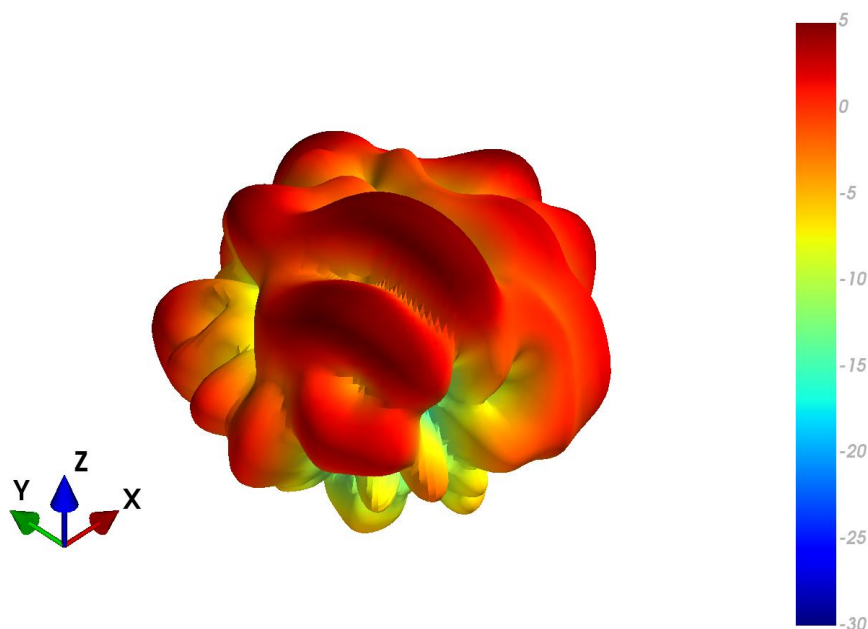


XZ Plane

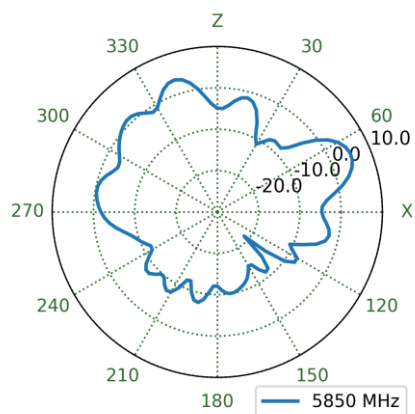


YZ Plane

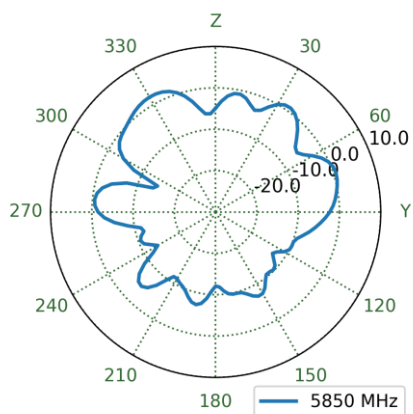


XY Plane

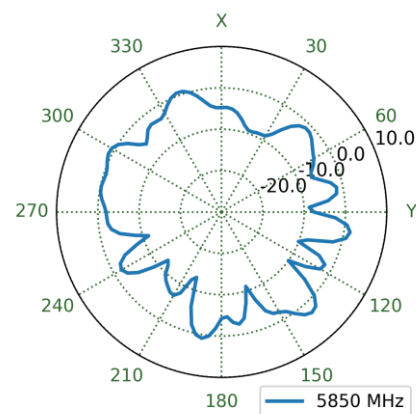


7.67 MIMO2 Wi-Fi Free Space Patterns at 5850 MHz

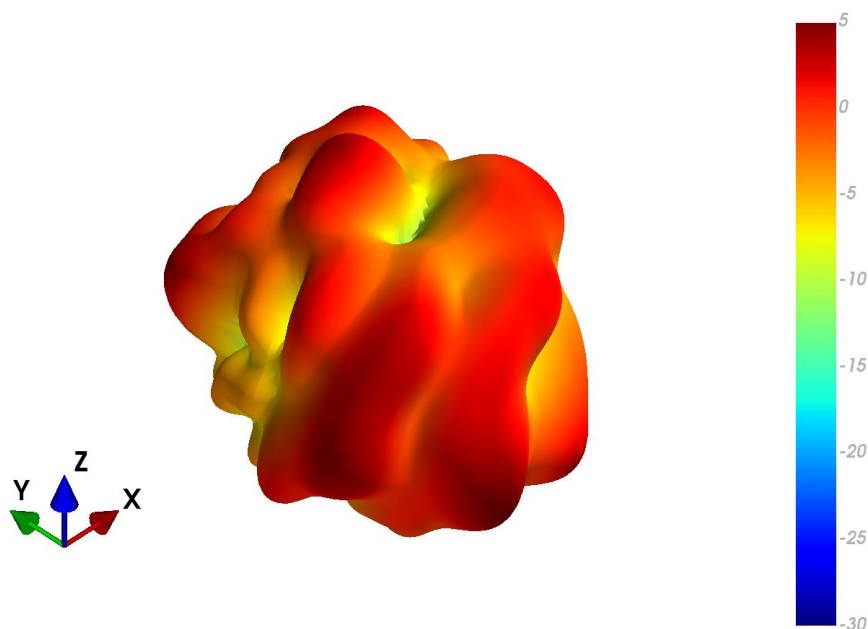


XZ Plane

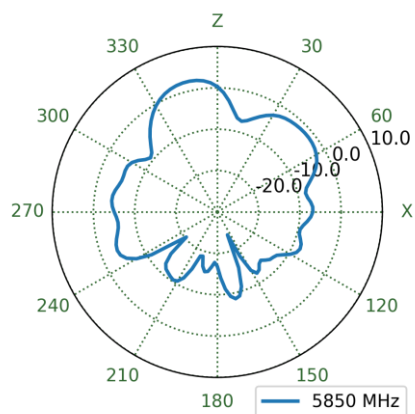


YZ Plane

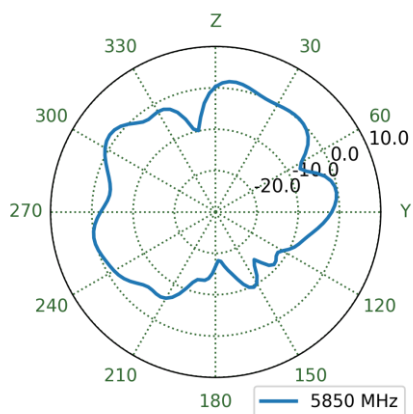


XY Plane

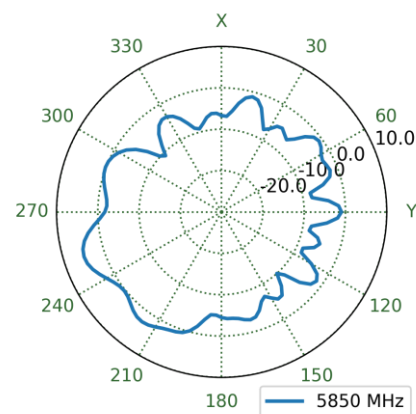


7.68 MIMO2 Wi-Fi Ground Plane Patterns at 5850 MHz

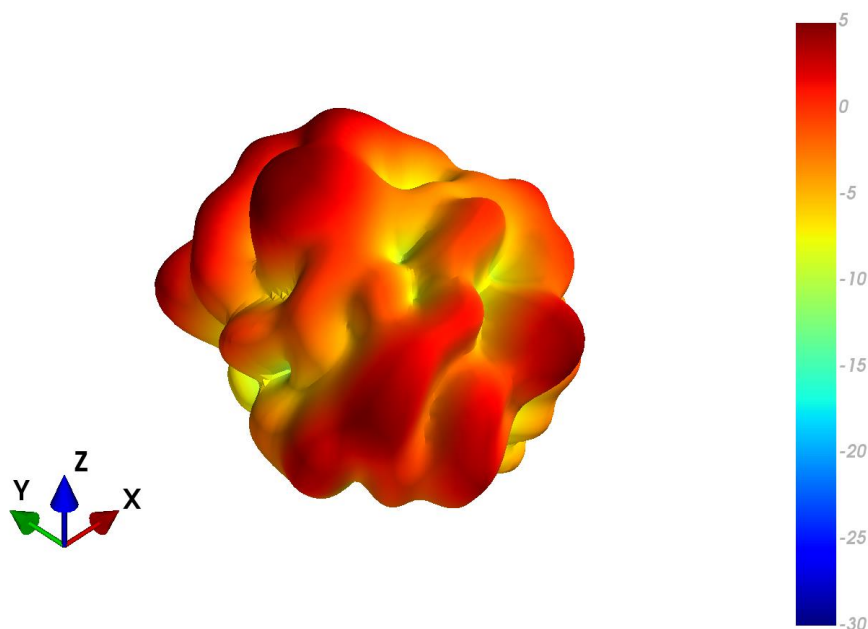


XZ Plane

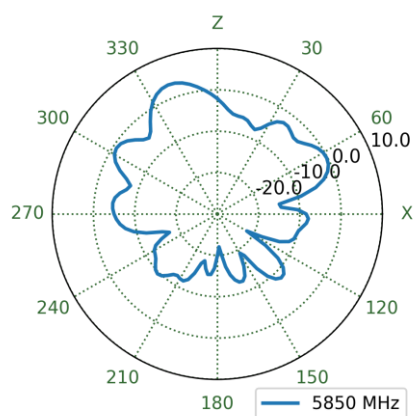


YZ Plane

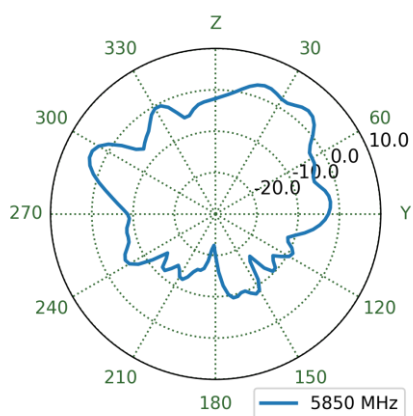


XY Plane

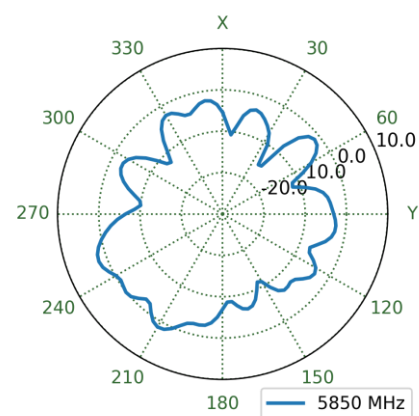


7.69 MIMO1 Wi-Fi Free Space Patterns at 6525 MHz

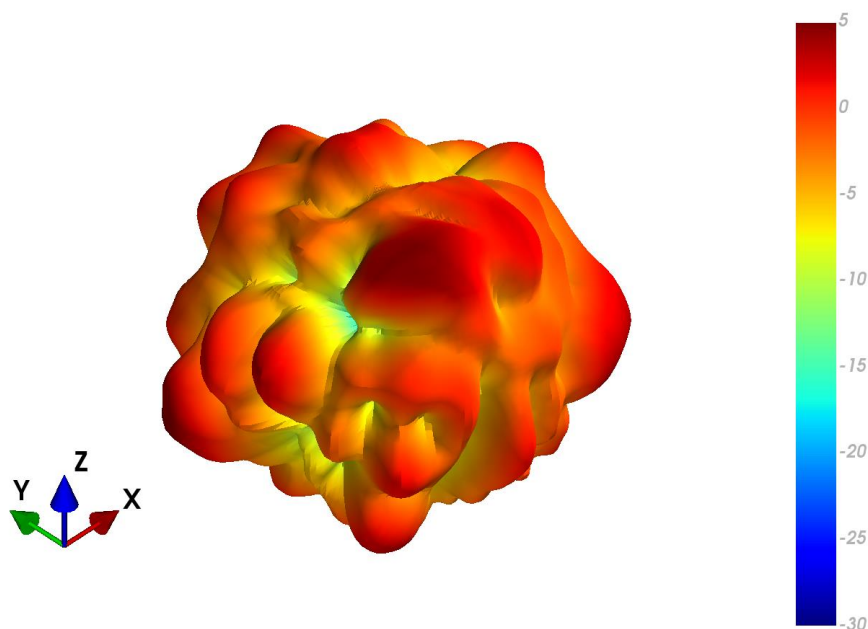


XZ Plane

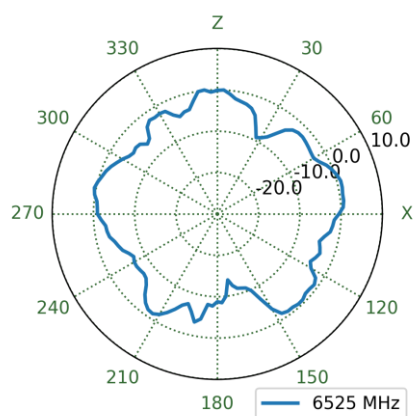


YZ Plane

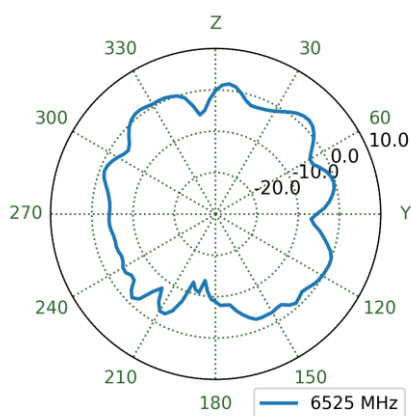


XY Plane

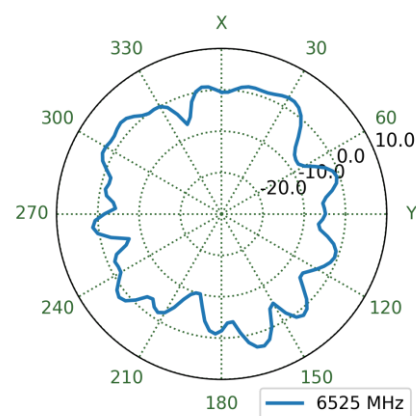


7.70 MIMO1 Wi-Fi Ground Plane Patterns at 6525 MHz

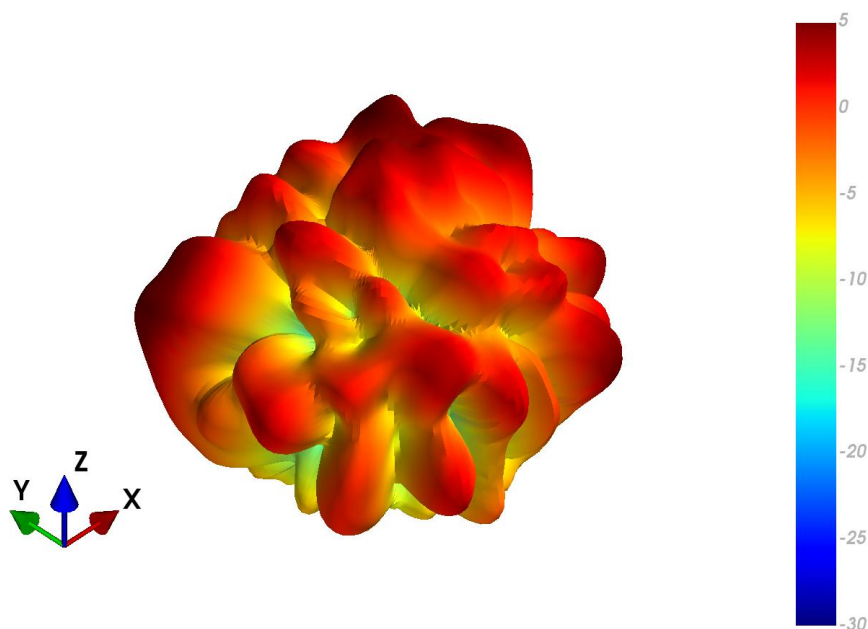


XZ Plane

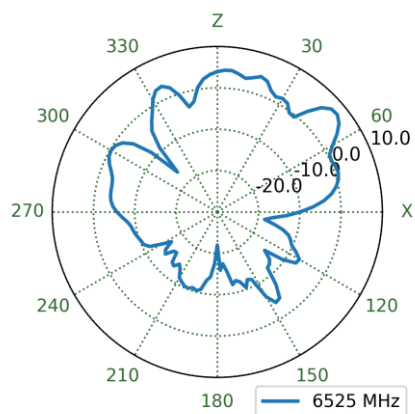


YZ Plane

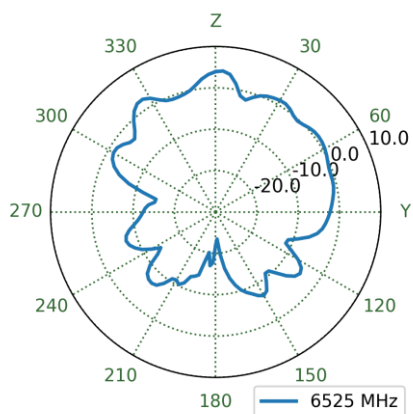


XY Plane

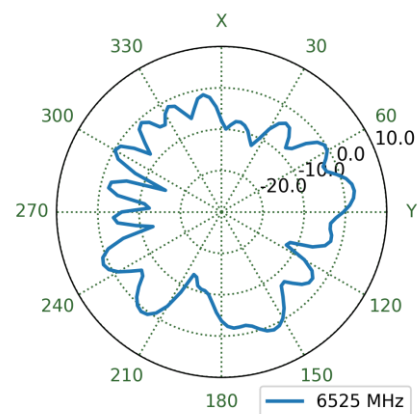


7.71 MIMO2 Wi-Fi Free Space Patterns at 6525 MHz

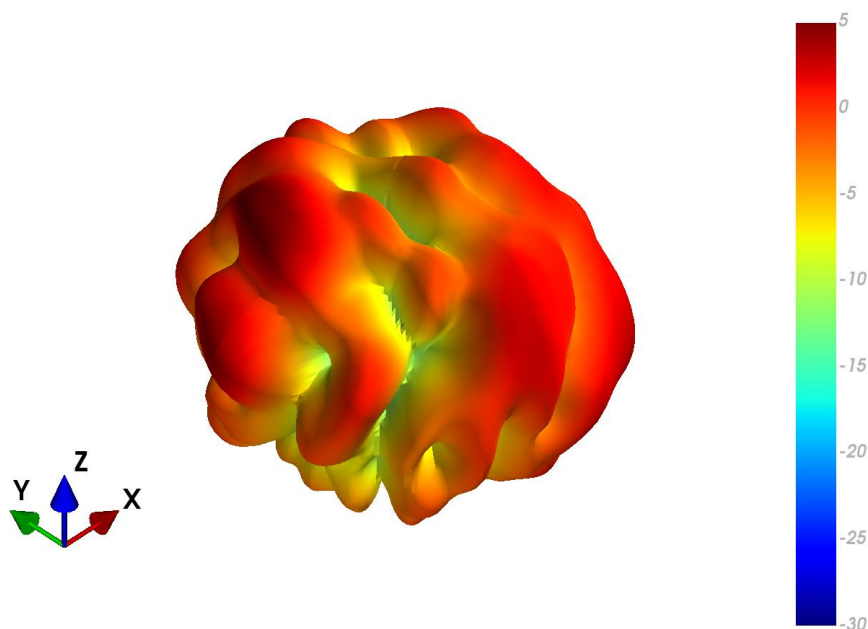


XZ Plane

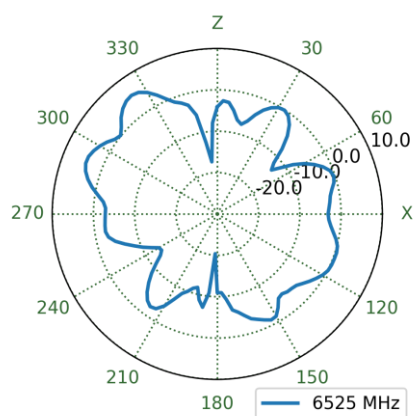


YZ Plane

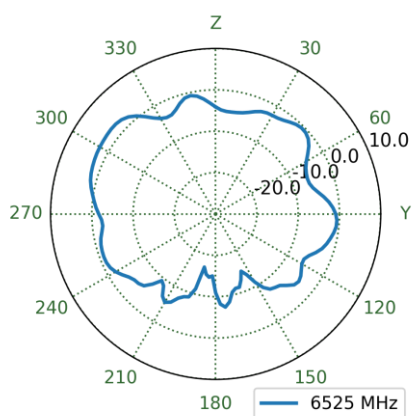


XY Plane

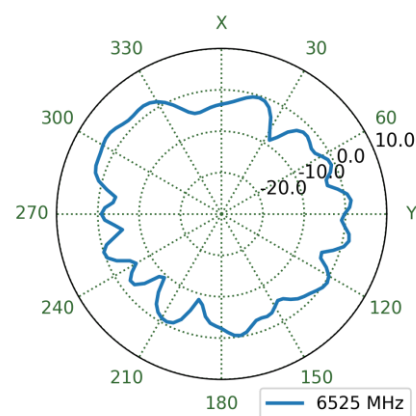


7.72 MIMO2 Wi-Fi Ground Plane Patterns at 6525 MHz

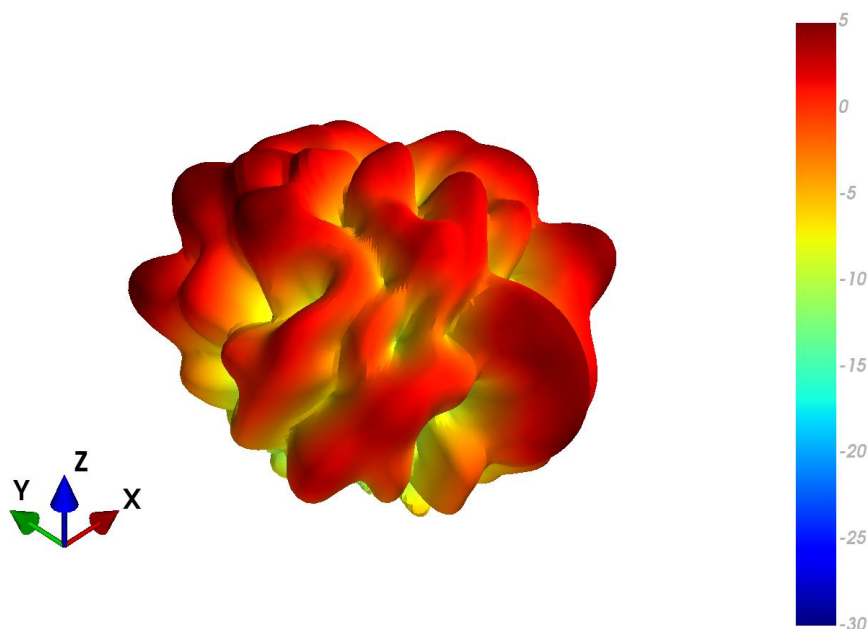


XZ Plane

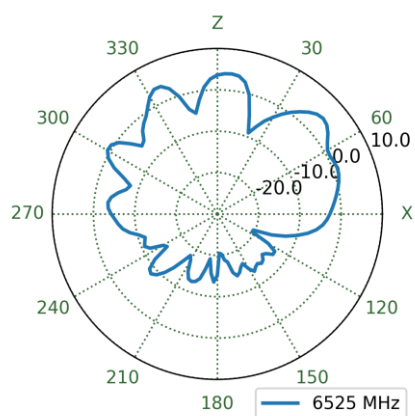



YZ Plane

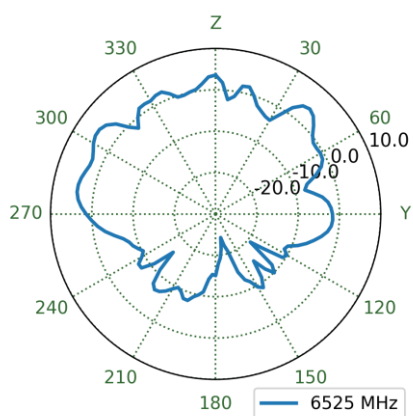


XY Plane

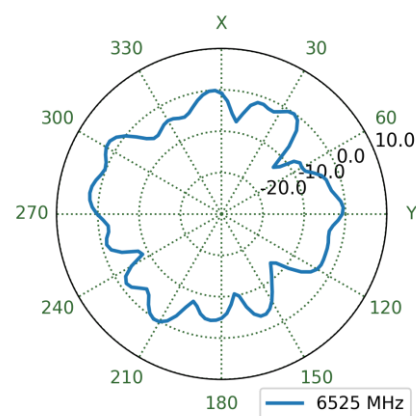


7.73 MIMO1 Wi-Fi Free Space Patterns at 7125 MHz

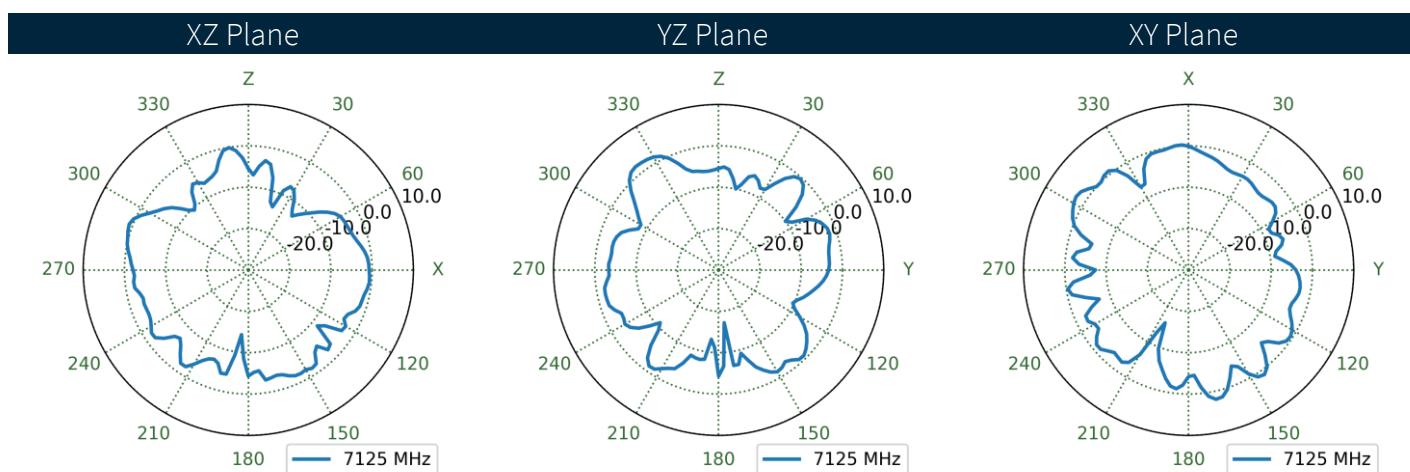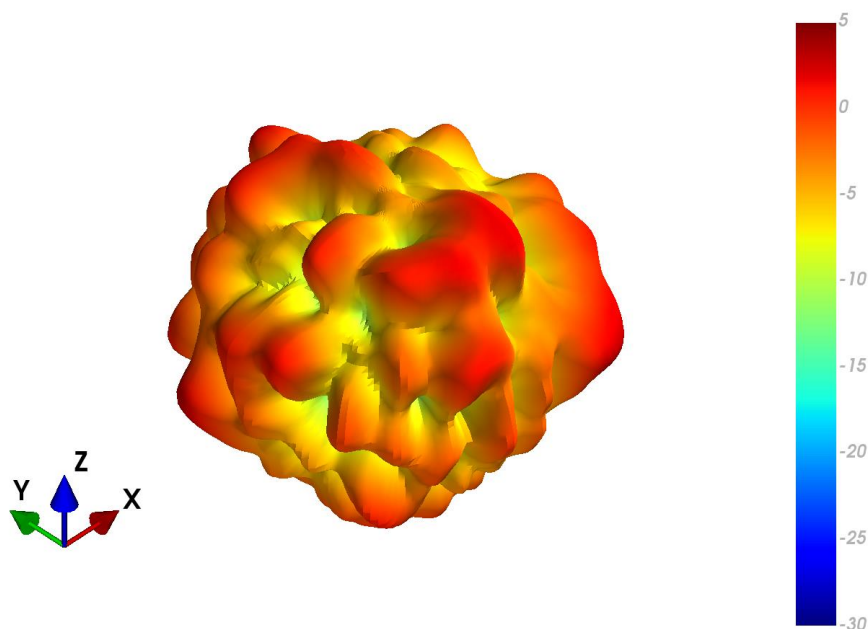


7.74 MIMO1 Wi-Fi Ground Plane Patterns at 7125 MHz

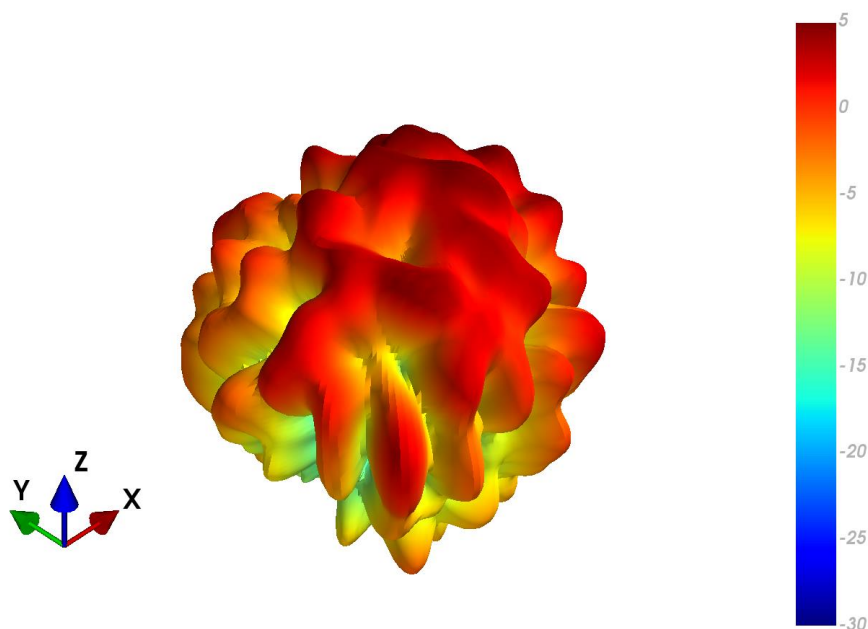


XZ Plane

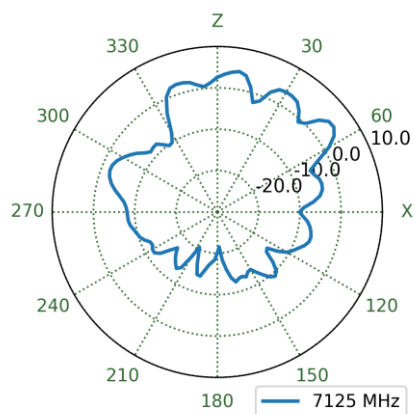


YZ Plane

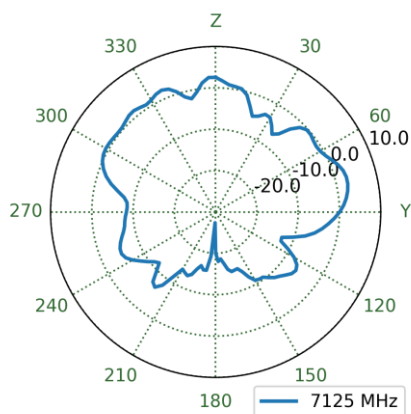


XY Plane

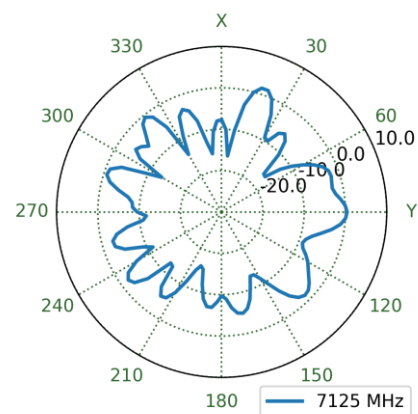


7.75 MIMO2 Wi-Fi Free Space Patterns at 7125 MHz

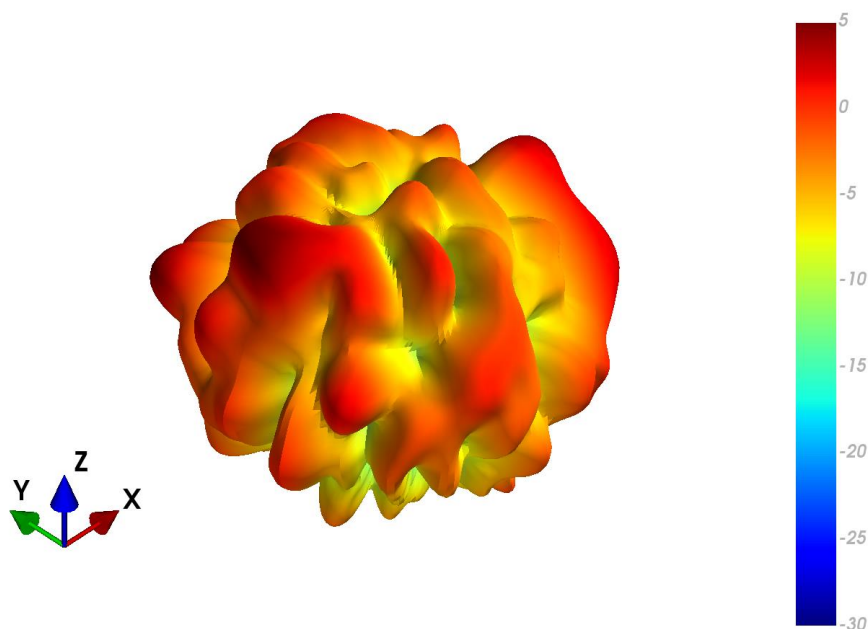


XZ Plane

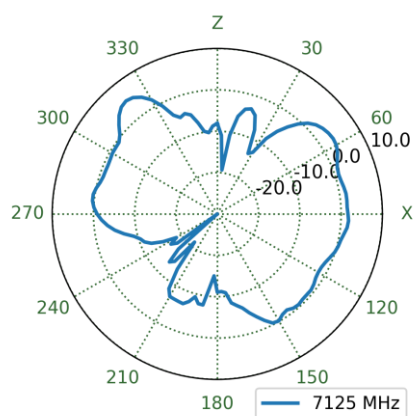


YZ Plane

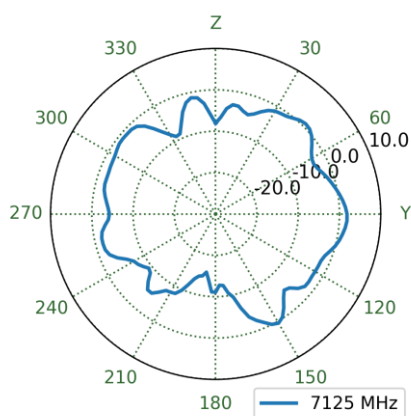


XY Plane

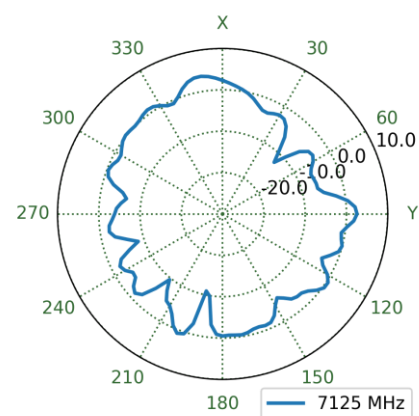


7.76 MIMO2 Wi-Fi Ground Plane Patterns at 7125 MHz

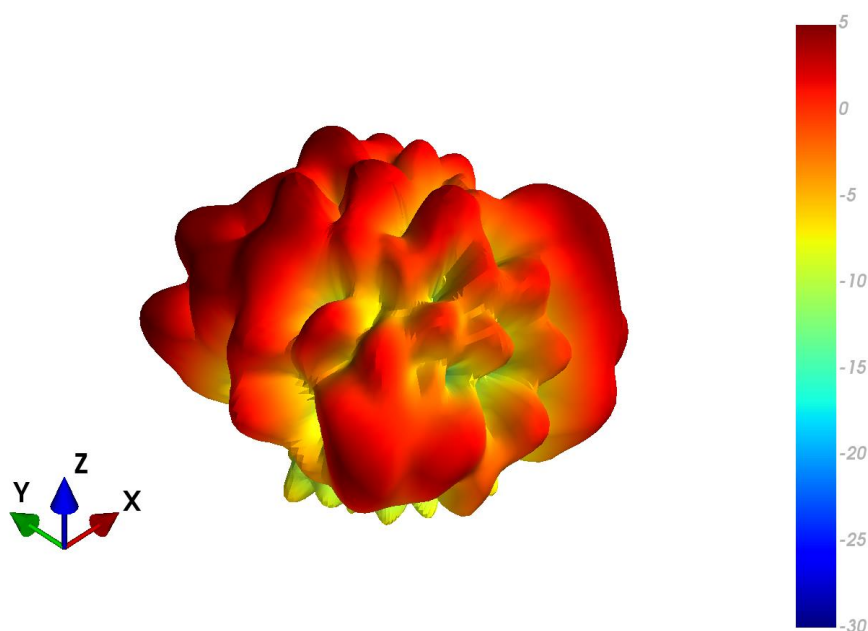


XZ Plane

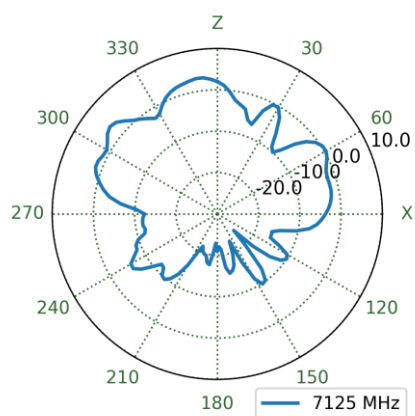

YZ Plane

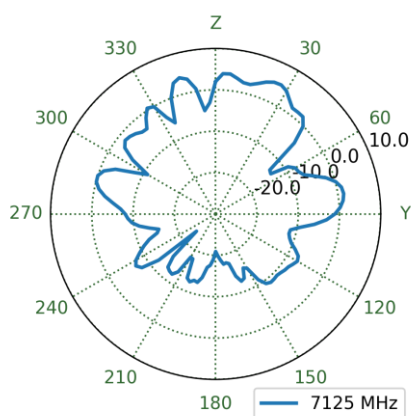

XY Plane

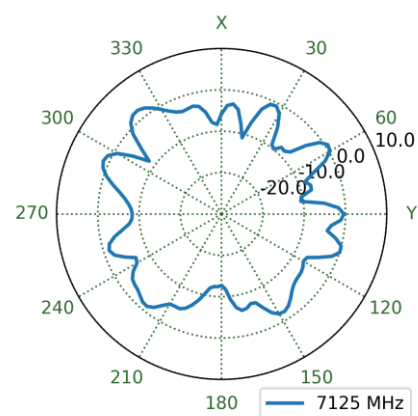

Changelog for the datasheet

SPE-22-8-161 - MA1555.A.001

Revision: H (Current Version)

Date:	2025-10-30
Notes:	Updated product features and introduction
Author:	Conor McGrath

Previous Revisions

Revision: G

Date:	2025-02-27
Notes:	Updated chamber setup photo
Author:	Gary West

Revision: B

Date:	2023-03-02
Notes:	Updated specifications
Author:	Cesar Sousa

Revision: F

Date:	2025-01-28
Notes:	Updated Installation Instructions
Author:	Cesar Sousa

Revision: A (Original First Release)

Date:	2022-10-09
Notes:	First initial Release
Author:	Gary West

Revision: E

Date:	2024-11-27
Notes:	Updated Passive GNSS Data
Author:	Gary West

Revision: D

Date:	2024-07-23
Notes:	Updated drawing
Author:	Conor McGrath

Revision: C

Date:	2023-05-16
Notes:	Added Installation Instructions
Author:	Cesar Sousa



www.taoglas.com

