

SpacePath 2500W Ultralinear Ku-Band Antenna Mount HPA

The STA53250P Ku series HPA provides ultra linear, high efficiency performance in a compact, lightweight, rugged, weatherproof, antenna mount enclosure. The advanced packaging and cooling techniques enable the unit to operate in extreme environmental conditions from direct rain to direct sunlight. The amplifiers can be simply deployed anywhere in the world, are user-friendly and incorporate a comprehensive remote control facility as standard, including RS485, RS232 and Ethernet options.

The HPA incorporates a high efficiency multi-collector TWT powered by an advanced power supply built on over 30 years of experience in the design and manufacture of satellite amplifiers.


The company's products have an enviable reputation for performance, robust quality and reliable service. The STA53250P Ku is available with a wide range of options and accessories, backed by worldwide technical support.

Features

- Advanced cooling design enables operation at +60°C and in direct sunlight
- Weatherproof antenna mount construction allows exposed mounting
- Ethernet/SMP/Webpage GUI interfaces
- Broadband – high efficiency operation
- Wide input voltage range - can operate from mains supplies worldwide
- Redundant control - contains control and drive circuits for 1:1 redundancy
- Stand-alone setting - automatically sequences to transmit mode
- Wide range of accessories including: Controllers, waveguide networks, cable assemblies



Block Diagram

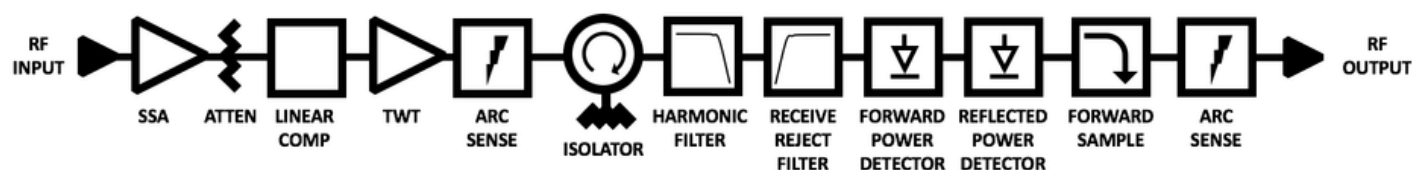

RF Performance		
Frequency range	KU1: 13.75 – 14.50 GHz KU2: 12.75 – 14.50 GHz KU3: 13.75 – 14.80 GHz KU4: 12.75 – 13.25 GHz	
Bandwidth	500 MHz / 750 MHz	
Output Power (for load VSWR ≤ 1.5:1)	System Power, PEAK	63.0 dBm (2000 W)
	TWT Power, PEAK	61.0 dBm (1250 W)
	Rated (flange)	59.5 dBm (950 W) typical
	Linear, P _{LIN}	59.5 dBm (950 W)
Gain	≥ 70 dB	
Gain Variation, 80 MHz, ΔG _{80MHz}	≤ 0.8 dB peak-peak	
Gain Variation, 750 MHz, ΔG _{750MHz}	≤ 2.5 dB peak-peak	
Slope, ΔG _{SLOPE}	± 0.04 dB/MHz max	
Gain Stability vs. Time	± 0.25 dB max / 24hrs @ constant drive and temperature	
Gain Stability vs. Temperature	± 1.0 dB max / 24hrs @ constant drive and frequency	
Adjustment range, G _{ADJ}	30.0 dB typical	
Adjustment step size	0.1 dB	
AM/PM	≤ 2.0°/dB @ P _O ≤ P _{LIN} - 1dB	
Inter-modulations (IMD) 2-tone	≤ -28 dBc @ P _O ≤ P _{LIN} - 1dB	
Spectral Re-growth (SR)	≤ -30 dBc @ P _O ≤ P _{LIN} - 1dB	
Noise Power Ratio (NPR)	≤ -19 dBc @ P _O ≤ P _{LIN} - 1dB	
Noise power	Transmit band	≤ -70 dBW/4 kHz
	Receive band	≤ -150 dBW/4 kHz (10.65 - 11.75/12.75 GHz)
Spurious @ P _O ≤ MLP	≤ -60 dBc	
Residual AM	≤ -50 dBc, f < 10kHz ≤ -20(1.5+LOG(frequency KHz))dBc, f = 10KHz to 500KHz ≤ -85 dBc >500KHz	
Phase Noise	10dB below IESS requirement ≤ -50 dBc max, AC fundamental ≤ -47 dBc max, Sum of all spurs	
Group Delay (any 80 MHz)	Linear	0.01 nsec/MHz, max
	Parabolic	0.005 nsec/MHz ² , max
	Ripple	0.5 nsec/Peak-Peak, max
Input VSWR (Return Loss)	≤ 1.3:1 (17.7 dB)	
Output VSWR (Return Loss)	≤ 1.3:1 (17.7 dB)	
Load VSWR (no damage)	≤ 2.0:1 (9.5 dB)	
Harmonic 2 nd & 3 rd	≤ -60 dBc	

Electrical	
Full Load Current	13 A max @ 200 VAC
AC Input Voltage	200-240 VAC $\pm$ 10%, single phase 50-60 Hz $\pm$ 5%
Power consumption	2300 VA typical (PA) 2600 VA maximum (PA) 5000 VA typical (SYSTEM) 5500 VA maximum (SYSTEM)
Power factor	0.98 typical 0.96 minimum

Physical	
Dimensions (request outline)	Depth: 52cm PA / 86cm SYSTEM Width: 26 cm PA / 79cm SYSTEM Height: 26 cm PA / 36cm SYSTEM
Weight	21KG typical (PA) 80KG typical (SYSTEM)
Cooling	Integral forced-air
RF Input	Type N(f) 50 ohm
RF Output	WR-75
RF Sample port	Type N(f) 50 ohm
AC Input	Amphenol C016 20C003 200 12
Ethernet	RJF71B
M&C Connector	PT07E18-32S (MS3114E-18-32S)

Environmental	
Ambient temperature	-40°C to +60°C
Relative humidity	100% condensing
Altitude	12,000 ft. with standard adiabatic de-rating of 2°C/1000 ft., operating 50,000 ft., non-operating
Shock	15 g peak, 11mSec, 1/2 sine
Vibration	3.2 g rms, 10-500 Hz
Acoustic Noise	65 dBA @ 3 ft. from amplifier
Solar Gain	1120 2/m2

Specifications are subject to change without notice